


MEDMASTER CLEANSCENE™

CS SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount – grid; 4'×4'
- » Expansive offering of high quality graphic images
- » Antimicrobial finish option available
- » Regressed frame kit available for even more aesthetic appearance

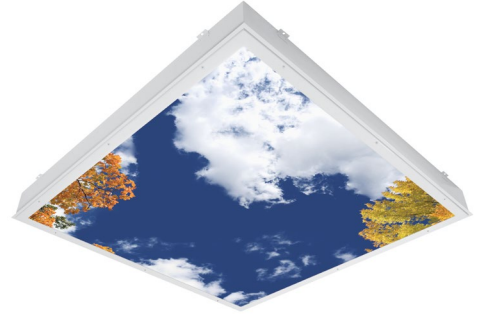

SPECIFICATIONS

HOUSING: 18-gauge aluminum. Hole-free one-piece seam welded construction. TGIC polyester powder coat finish in standard white or optional black, with five-stage pre-treatment. Salt spray test: 1,000 hours. Antimicrobial finish optional on all exposed painted surfaces of installed luminaire.

DOORFRAME: 18-gauge aluminum. One-piece inset construction welded corners. TGIC polyester powder coat finish in standard white or optional black, with five-stage pre-treatment. Salt spray test: 1,000 hours. Antimicrobial finish optional on all exposed painted components of installed luminaire. Doorframe secured to housing with aircraft cables and 8 captive mounted Phillips-head stainless steel fasteners. Closed cell Neoprene/EPDM/SBR gasket seals doorframe to housing.

LENS: .177" acrylic lens secured with continuous lens retention system.

REGRESSED FRAME KIT (ACCESSORY): One-piece, .08" thick, seamless aluminum construction TGIC polyester powder coat finish in matte white or black. Provides easy-to-install, architectural skylight effect by raising fixture 2-inches above standard 1" or 1.5" T-bar grid ceiling.

ELECTRICAL: High-brightness, 6500K LED light source. 120-277VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (0.95 PF). Standard 0-10V dimming with 1-100% range; 250µA maximum source current. EMC meets FCC Part 15, Class A limits.

SENSOR & CONTROLS: Optional sensor available with compatible third party controls. To see the full list of compatible controls, click [here](#).

INSTALLATION: Designed for 1" and 1.5" grid. (Housing includes hanging brackets to secure housing with wire to super structure).

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. Build America, Buy America Act compliant.





ORDERING INFORMATION (Ex: CS44-G10-1-26L65K-DV-PAFW-PAH-AMF-RFK44W)

Model	Mounting	Lamp Qty	Lamp Type	Voltage	Frame Type	Housing Option	Options	Accessory	Image Selection
CS44		1	26L65K	DV		PAH			
Mounting Options				Voltage		Housing Options*		Accessory	
G10 Grid (1")				DV 120-277 Volts		PAH .050" Painted Aluminum		RFK44W Regressed Frame Kit in White	
G15 Grid (1.5")								RFK44B Regressed Frame Kit in Black	
Lamp Quantity				Frame Type		Options		Image Selection	
1 One System				PAFB Black Painted Aluminum		AMF Antimicrobial Finish (All Exposed Surfaces)		Click here for CleanScene lightbox image selections and ordering numbers. Consult factory for alternate image selection approval.	
Lamp Type				PAFW White Painted Aluminum					
26L65K 26 Watt 6500K LED									

* Finish color to match Frame Type selection

DIMENSIONAL DATA

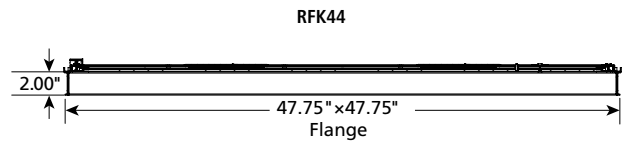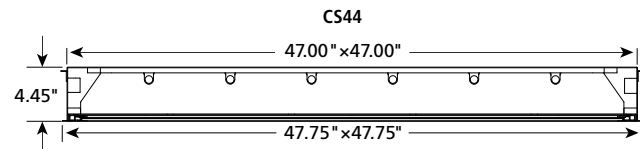

GRAPHIC IMAGE SIZE NEEDED – 4×4 FIXTURE

Grid 1.0 (G10) 44.575"×44.575"

Grid 1.5 (G15) 44.075"×44.075"

*Subtract .50" from housing width and length when 1.5" grid mounting option is specified.

