


LOW PROFILE SERIES

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

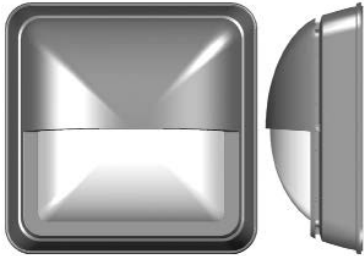

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. DISCONNECT POWER TO ALL CIRCUITS BEFORE WIRING FIXTURE. INSTALL IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL CODES. DO NOT CONNECT TO AN UNGROUNDED SUPPLY. READ ALL FIXTURE MARKINGS AND LABELS TO ENSURE CORRECT INSTALLATION OF FIXTURE. SUPPLEMENTAL INSTRUCTIONS MAY BE LOCATED ON THE FIXTURE, IN ADDITION TO THIS INSTRUCTION SHEET, REGARDING ORIENTATION, OR MOUNTING RESTRICTIONS.

SAVE THESE INSTRUCTIONS

INSTALLATION INSTRUCTIONS

1. Disconnect power to the circuit before wiring fixture(s).
 2. Loosen four (4) concealed Torx® tamper-resistant screws on sides of fixture to remove lens. Screws only need to be loosened enough to disengage lens.
 3. Remove the two (2) fasteners securing reflector to fixture housing.
 4. Read all fixture markings and labels to ensure correct installation of the fixture. Additional information may be located on the fixture, separate from this instruction sheet, regarding orientation and mounting restrictions.
 5. Place fixture over an installed electrical junction box. Locate and drill four (4) pilot holes in the mounting surface. Use fixture base as a template. MS11DL and MS15DL fixtures are mounted at a 45° angle.
 6. Remove backing from gasket pad and place on the back side of the fixture. Line up holes in gasket with mounting holes on fixture.
 7. Using ¼-20 fasteners and anchors appropriate for the mounting surface (not supplied), mount fixture to building. For wall-mount fixtures, note the label entitled "This Side Up" for proper orientation.
- NOTE: For the Peace of Mind Guarantee™, the fixture must be mounted to a structurally-sound surface with at least four (4) ¼-20 fasteners (four-point mounting). Attachment to the electrical box only will not ensure proper fixture performance.
8. Connect fixture leads to power supply leads using connectors suitable for the gauge and number of wires being used (not included). Connections are to be made inside the junction box, not the fixture (except in cases where WireMold™ is used). Make sure to connect grounding wire to a suitable ground.
 9. Organize wiring to prevent pinching or cutting of wire insulation.
 10. Reinstall reflector to fixture housing using the two (2) screws provided.
 11. Mount lens to fixture. Push on center of lens to pre-compress the gasket. Tighten all four (4) Torx® tamper-resistant screws until fully seated in the fixture. Check that all screws have engaged the lens.



CUSTOMER SERVICE

For technical assistance, call 1-800-4KENALL (1-800-453-6255).

WARRANTY

For warranty information visit www.kenall.com/Resources/Certified-Performance-Warranties



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2015 Kenall Mfg. Co. All rights reserved.