

NOVA II™

N1024 SERIES (6300)

PROJECT INFORMATION

Job Name _____
 Fixture Type _____
 Catalog Number _____
 Approved by _____

PRODUCT FEATURES:

- » Surface mount – ceiling or wall; nominal 10" x 24"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with six-point mounting
- » One-piece seam wraparound polycarbonate lens



SPECIFICATIONS

BASEPLATE: 16-gauge CRS. Baseplate provided with six-point mounting holes and one wireway hole. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: One-piece wraparound lens with two alignment security tabs for baseplate engagement. UV-stabilized, high impact, virgin injection molded clear prismatic polycarbonate. Nominal thickness .125".

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

GASKET: Die-cut closed cell neoprene gasket seals lens/housing to mounting surface.

HARDWARE: Four stainless steel Torx® with center pin fasteners secure lens/housing to baseplate.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor. 0°F min. starting temperature standard.

INSTALLATION: Six-point mounting required for Peace of Mind Guarantee®. "Twist-out" sections with gaskets, permit 1/2" conduit access on each end without special adapter.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.


LISTINGS: UL and CUL listed for Wet Locations – covered ceilings only.



ORDERING INFORMATION (Ex: N1024-C-2-14-RS-1-DV)

Model	Lens Type	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options	Accessories
N1024	C							
Lens Type		Lamp Type		Options				
C	Clear Prismatic	14	F14T5 (Two lamp only)	EL Standard Lumen Battery Pack (32°F, one-lamp operation)				
		17	F17T8	FS Single Fuse & Holder				
Lamp Quantity		Ballast Type		MS6 Two Maximum Security End Flange Retainer Clips (with 8 screws)				
2	Two Lamps	IS Instant Start Electronic <10% THD (T8)		TN 5 Watt Twin Tube NPF Night Light (n/a with 347V or DV)				
3	Three Lamps	RS Rapid Start Electronic <10% THD (CFL, T8, T5)		Accessories				
4	Four Lamps	SB Specified Ballast		CM Corner Mount Adapter – Damp Locations only				
		Ballast Quantity		CMW Corner Mount Adapter – Wet Location Covered Ceiling only				
		1 One		SA Surface Adapter – Wet Location Covered Ceiling only				
		2 Two (n/a with 4 lamp; 3 lamp n/a with EL or TN)		9500 Torx® Screwdriver				
		Voltage						
		120 120 Volts						
		277 277 Volts						
		347 347 Volts						
		DV 120-277 Volts						

DIMENSIONAL DATA

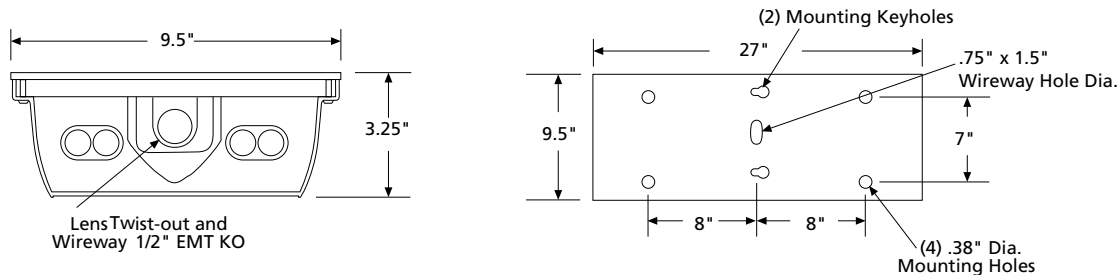

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.