MIGHTY MAC[™]

RQCA SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount $12" \times 12"$
- » TIG welded housing with no post grinding for additional strength
- » Completely concealed internal drop slot piano hinge
- » Ligature resistant construction

SPECIFICATIONS

HOUSING: Die-formed prime grade material as specified - see ordering information. Lapped and spot welded construction.

LENS: As specified - maximum thickness .625" - see ordering information. Kenall recommends a prismatic inner lens and a clear outer lens. Two clear lenses used in combination cannot be provided.

LENS RETENTION: Vertically adjustable continuous "Z" brackets of prime grade material, secured to housing via thru-studs (6" maximum spacing).

DOOR: One-piece die-formed prime grade material as specified – see ordering information. Corners continuously seam welded and smooth with no post grinding (TIG).

HINGE: Completely concealed spring loaded internal drop slot piano hinge (1/2" knuckle/1/8" diameter pin). Pin secured to knuckle. Hinge welded to door and mounts to either side of housing via keyholes.

FASTENERS: Hardened security screws as specified - see ordering information. Fully recessed.

FINISH: TGIC polyester powder coat - 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

ELECTRICAL: Available 3500K, 4000K and 5000K color temperatures, 82 CRI. 120-277VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 3-100% range, maximum driver source of 250 μA.

SENSOR & CONTROLS: Optional sensor available with compatible third party controls. To see the full list of compatible controls, click here.

LUMINOUS SEAL: Polyurethane foam prevents light leaks from luminaire base.

INSTALLATION: See Mighty Mac^{III} Recessed Flange Mount Data Technical Sheet or consult factory with questions.

PHOTOMETRICS: For photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year warranty on LED lamps.

LISTINGS: UL and CUL listed for damp locations. See ordering information for wet location applications. Non IC rated. Ligature resistant construction. Build America, Buy America Act compliant.

BA)_{us} (*LR* ED <u>[</u>ער] C

ORDERING INFORMATION (Ex: RQCA-A-0/0-1-23L40K-DCC-120-1/B-1)

Model	Door/Housing	Lamp Qty	Lamp Type	Drive	Туре	Voltage	Lens (Inner/Outer)	Faster	ers Options	Accessories
RQCA	/	1			DCC		<u> </u>			
Door/Housing Material 0 14-Ga CRS (Painted White) 1 16-Ga CRS (Painted White) 2* 18-Ga CRS (Painted White) 3 14-Ga SS (Painted White) 4 16-Ga SS (Painted White) 6** 14-Ga SS (Brushed)		Lamp Quantity 1 One Lamp Type 231.35K 23 Watt 3500K LED 231.40K 23 Watt 4000K LED 231.50K 23 Watt 5000K LED		Driver Type DCC Dimming Constant Current Driver Voltage 120 120 Volts 277 277 Volts 347 347 Volts			Fasteners 1 Torx® T-20 Head w/ Center Pin 2 Allen Head w/ Center Pin Options LEL LED Emergency Battery Backup DLN LED Night Light w/Light Level Control			
** 16-Ga SS (Brushed) ** 12-Ga CRS (Painted)				DV	120-277 Volts (Inner/Outer)‡ No Lens			FS WL	(100% - 20%) Single Fuse & Holder Wet Location Listed	
				1 2 3 G▲ 4 TG	.125" Prismatic Acry .125" Prismatic Poly .125" Textured Polyc .125" Clear Polycark .156" Prismatic Poly .250" Textured Temp	carbonate carbonate oonate carbonate		Acces CC YF PF	ssories Cross Channel Mo Yoke Frame Mount Plaster Frame Mou	ing Kit
				 TG .250° Textured Tempered Glass 6 .187° Prismatic Polycarbonate 7[▲] .187° Clear Polycarbonate 8[▲] .250° Clear Tempered Glass 9[▲] .250° Clear Tempered Glass 8[▲] .375° Clear Polycarbonate C[▲] .375° Clear Polycarbonate C[▲] .375° Clear Tempered Glass J[▲] .500° Clear Tempered Glass J[▲] .500° Clear Tempered Glass 				 * n/a as Door Material * n/a with Housing Material Must be paired with prismatic, textured or diffused lens † Can only be used with clear outer lens 		



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA A brand of legrand This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Ace (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents.Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2025 Kenall Mfg. Co.


PROJECT INFORMATION
Job Name
Fixture Type
Catalog Number
Approved by


MIGHTY MAC[™] RQCA SERIES PERFORMANCE

	Initial Deliver	red Lumens				
Lamp Type	@ 25°C	Efficacy (lm/W)	Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)	
23L35K	1711	59	29	94	80,000	
23L40K	1824	63	29	94	80,000	
23L50K	1897	65	29	94	80,000	

Information above is valid for the recommended Type PP lens type and is subject to change without notice. Visit www.kenall.com for additional information.

Model: RQCA-A-0/0-1-23L40K-DCC-DV-Y/B-1

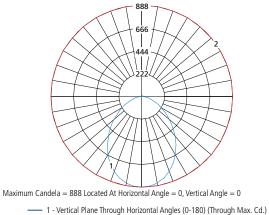




DIMENSIONAL DATA

CROSS SECTION



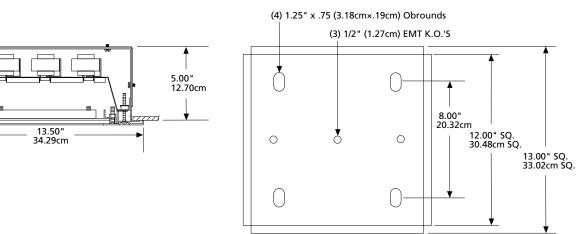

RECOMMENDED CEILING CUTOUT: 12.25"×12.25" (31.12cm×31.12cm)



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA A brand of Legrand This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Ace (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents.Content of specification sheets is subject to change; please consult www.kenall.com for current product details. @2025 Kenall Mfg.Co.