

SHERIFF™

SH548 SERIES FOR WET WALL MOUNT LOCATIONS

PROJECT INFORMATION

Job Name _____


Fixture Type _____

Catalog Number _____

Approved by _____

PRODUCT FEATURES:

- » Surface wall mount – 5"×48"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage

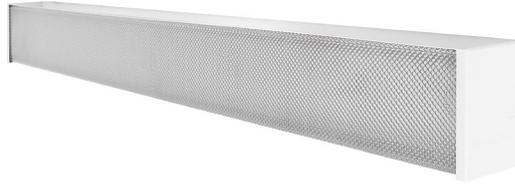

SPECIFICATIONS

BASEPLATE: One-piece 16-gauge CRS baseplate with welded corners. Baseplate provided with six-point mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Lens is positioned in baseplate channels and retained with six stainless steel Torx® fasteners Baseplate/end caps mount flush to wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® T-20 with center pin fasteners secure lens in baseplate channel.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

INSTALLATION: Six-point mounting required for Peace of Mind Guarantee®.


LISTINGS: UL and CUL listed for Wet Location (Horizontal wall mount only). Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.



ORDERING INFORMATION (Ex: SH548W-2-32-RS-1-DV-FS)

Model	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options
SH548W						
Lamp Quantity		Ballast Type		Options		
1	One Lamp	IS	Instant Start Electronic <10% THD (T8)	EL	Standard Lumen Battery Pack (32°F one-lamp operation)	
2	Two Lamps (T5,T8,40B)	RS	Rapid Start Electronic <10% THD (CFL, T8, T5, T5HO)	.187	.187" P12 Polycarbonate Lens	
3	Three Lamps (T8 only)	SB	Specified Ballast	AL	Marine Grade Aluminum Housing	
Lamp Type		Ballast Quantity		BSS	Brush Stainless Steel Housing	
28	F28T5	1	One	DLN	LED Night Light w/Light Level Control (100% - 20%)	
32	F32T8	2	Two	FS	Single Fuse & Holder	
54*	F54T5HO	Voltage		KO	Two 1/2" EMT Conduit Entry Knockouts (one per end cap)	
40B	F40TT (2)	120	120 Volt	OP	Opal Polycarbonate Lens	
		277	277 Volt	PSS	Painted Stainless Steel Housing	
		347	347 Volt	TN	5 Watt Twin Tube NPF Night Light (n/a w/ 347V or DV)	
		DV	120-277 Volts		*Available with one lamp only	

DIMENSIONAL DATA

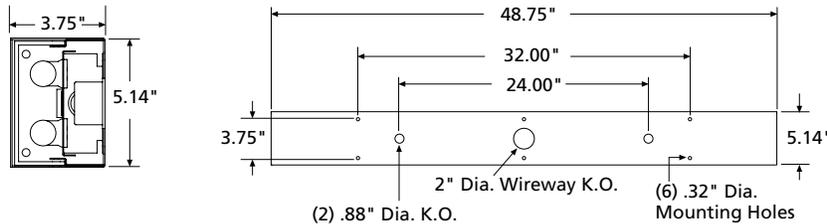

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **Legrand**