


SHERIFF™

SH596 SERIES FOR WET LOCATIONS

PRODUCT FEATURES:

- » Ceiling/Wall Mount – 5" x 96"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage

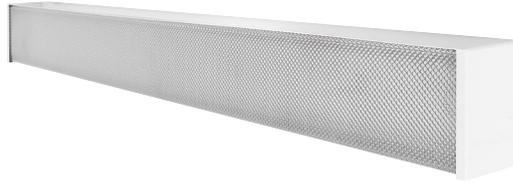

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 16-gauge CRS baseplate and seam welded end caps. Baseplate provided with fourteen mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. See Options for alternative materials and finishes. Lens is positioned in baseplate channels and retained with ten stainless steel Torx® fasteners. Baseplate/end caps mount flush to wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® T-20 with center pin fasteners secure lens in baseplate channel.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor. One-lamp 90 minute nickel-cadmium battery pack (EL) includes inverter charger, test switch and charging indicator lamp.

INSTALLATION: Ten point mounting required for Peace of Mind Guarantee®.

WARRANTY: Limited one (1) year Kenall fluorescent warranty. [Peace of Mind Guarantee against breakage.](#)

LISTINGS: UL and CUL listed for Wet Location (Horizontal wall mount only). Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.




ORDERING INFORMATION (Ex: SH596W-2-32-RS-1-DV-FS)


Model	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options
SH596W						
Lamp Quantity (cross section)		Ballast Type		Options		
1	One	IS	Instant Start Electronic <10% THD (T8)	.187 .187" P12 Polycarbonate Lens		
2	Two	RS	Rapid Start Electronic <10% THD (T8,T5,T5HO)	AL Marine Grade Aluminum Housing		
3	Three (n/a with T5HO)	SB	Specified Ballast	BSS Brush Stainless Steel Housing		
Lamp Type		Ballast Quantity		EL T-8 One-Lamp Battery Pack (32°F)		
4' Lengths		1	One	PEL High Lumen Battery Pack (32°F one-lamp operation)		
28	F28T5	2	Two	FS Single Fuse & Holder		
32	F32T8	Voltage		KO Two 1/2" EMT Conduit Entry Knockouts (one per end cap)		
54	F54T5HO	120	120 Volt	OP Opal Polycarbonate Lens		
8' Lengths		277	277 Volt	PSS Painted Stainless Steel Housing		
96	F96T8	347	347 Volt (4' only)			
		DV	120-277 Volts (<10% THD)			

DIMENSIONAL DATA

CROSS SECTION



MOUNTING HOLES

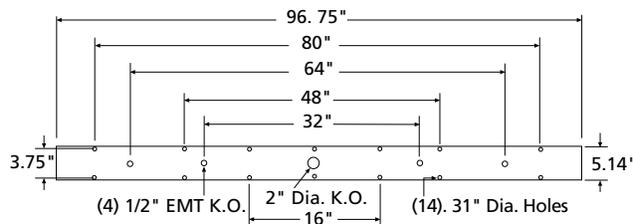

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **Legrand**