

MIGHTY MAC™

SSC SERIES

PRODUCT FEATURES:

- » Surface ceiling mount – 20"×24", 20"×48"
- » TIG welded housing with no post grinding for additional strength
- » Vertically adjustable bracket secured to housing via thru-studs
- » Completely concealed internal drop slot piano hinge



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: One-piece die-formed prime grade material as specified – see ordering information. Corners continuously seam welded and smooth with no post grinding (TIG). Clamshell housing resistant to penetration and contraband concealment. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

BASEPLATE: Prime grade material as specified – see ordering information. Die-formed blade trap (1/4" minimum) prevents contraband concealment and access. Embossed standoffs prevent distortion.

LENS: As specified – maximum thickness .625" – see ordering information. Kenall recommends a prismatic inner lens and a clear outer lens. Two clear lenses used in combination cannot be provided.

LENS RETENTION: Vertically adjustable continuous "Z" brackets of prime grade material, secured to housing via thru-studs (6" maximum spacing).

HINGE: Completely concealed 2" drop slot internal piano hinge (1/2" knuckle/1/8" diameter pin) standard. Pin secured to knuckle. Hinge welded to housing and mounts to either side of baseplate via keyholes. See Options for Full Length Internal Hinge (IHF).

FASTENERS: Hardened security screws as specified – see ordering information. Fully recessed.

LAMPS: Quantity and type as specified – see ordering information. Lamps supplied by others.

BALLAST: Quantity and type as specified – see ordering information. All ballasts UL listed class P. Optional removable reflector/lamp/ballast tray with quick disconnect.

LUMINOUS SEAL: Polyurethane foam prevents light leaks from luminaire base.

INSTALLATION: Fixture not suitable for Surface Conduit or Continuous Row Mounting.

PHOTOMETRICS: Efficiency of SSC4-0/0-432-IS-1-120-1/9-1 = 68%. For photometric information, go to www.kenall.com.

WARRANTY: One (1) year warranty for Kenall fluorescent products.

LISTINGS: UL and CUL listed for damp locations. See ordering information for wet location applications.



ORDERING INFORMATION (Ex: SSC-4-0/0-2-32-RS-1-120- 1/B-1)

Model	Size	Hsg./Door Material	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Lens (Inner/Outer)	Fasteners	Options			
SSC	/							/					
Nominal Size		Lamp Quantity			Ballast Quantity			Fastener					
2	20"×24"	2	Two	1	One	1	Torx® T-20 Head w/ Center Pin						
4	20"×48"	3	Three	2	Two	2	Allen Head w/ Center Pin						
4		4	Four										
Housing/Base Material		Lamp Type			Voltage			Options					
0	14-Ga CRS (Painted White)	2'	Nominal Length	120	120 Volts	EL•	Standard Lumen EL Pack						
1	16-Ga CRS (Painted White)	17	F17T8	277	277 Volts	PEL•	High Lumen EL Pack						
3	14-Ga SS (Painted White)	4'	Nominal Length	347	347 Volts	SEL•	Specified EL Pack						
4	16-Ga SS (Painted White)	28	F28T5				DLN	LED Night Light w/Light Level Control (100% - 20%)					
6*	14-Ga SS (Brushed)	32	F32T8				FS	Single Fuse & Holder					
7*	16-Ga SS (Brushed)	54	F54T5HO				IHF	Full Length Internal Hinge					
9	12-Ga CRS (Painted White)	Ballast Type			Lens (Inner/Outer)‡			RGT	Removable Gear Tray				
		IS	Instant Start Electronic <10% THD (T8)				0	No Lens	SK	Speaker Housing Extension			
		RS	Rapid Start Electronic <10% THD (CFL, T8, T5, T5HO)				1	.125" Prismatic Acrylic	TN	PL Night Light – 5/7/9 Watt (Lamp supplied by other)(120/277V only)			
		SB	Specified Ballast				2	.125" Prismatic Polycarbonate	UV	Ultraviolet Filter			
								3	.125" Textured Polycarbonate	WL	Wet Location Listed		
								G	.125" Clear Polycarbonate				
								4	.156" Prismatic Polycarbonate				
								6	.187" Prismatic Polycarbonate				
								7	.187" Clear Polycarbonate				
								8	.187" Clear Tempered Glass				
								9	.250" Clear Polycarbonate				
								A	.250" Clear Tempered Glass				
								B	.375" Clear Polycarbonate				
								C	.375" Clear Tempered Glass				
								J	.500" Clear Polycarbonate				
								P	.500" Clear Tempered Glass				



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA


This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.

A brand of **legrand**

MIGHTY MAC™

SSC SERIES

DIMENSIONAL DATA

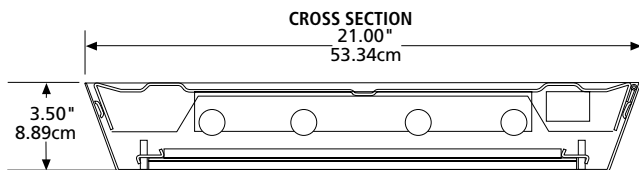

MOUNTING HOLES

