

TEKDEK™ EMERGENCY BATTERY PACK

LEL OPTION


PROJECT INFORMATION
Job Name
Fixture Type
Catalog Number
Approved by

PRODUCT FEATURES:

- » Test switch/charging indicator light
- » Nickel cadmium battery for 7-10 year life expectancy
- » 32°F to 122°F (0°C to +50°C) temperature rating



CROSS SECTION / DETAILS

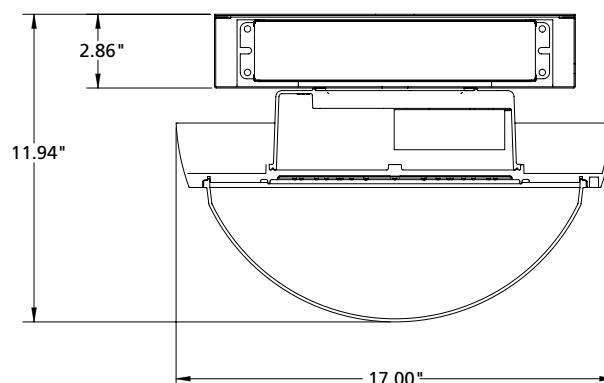

LEL OPTION SPECIFICATIONS

MOUNTING: Attached to TD17 at factory. Not available with Quick Mount (QM) ordering option.

ELECTRICAL: 120/277 VAC, 60 Hz dual input voltage.

BATTERY BACKUP: 90-minute emergency LED driver. 7W max. output.


OPERATION: When AC power fails, the battery pack immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

INSTALLATION: May be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. Installed on top of the fixture (not available with Quick Mount ordering option of TD17). 32°F to 122°F (0°C to +50°C) temperature rating.

WARRANTY: Battery pack warrantied for 5 years.

LISTINGS: Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

TOP INSTALLATION VIEW

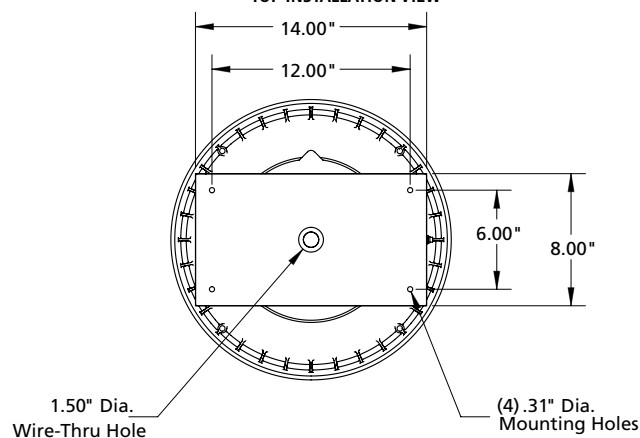

*Shown above with Direct-to-Surface (DTS) mounting option.



www.kenall.com

P: 800-4-Kenall

F: 847-360-1781

1020 Lakeside Drive Gurnee, Illinois 60031

When you see this image, you will know the Kenall product shown or described is manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2011 Kenall Mfg. Co. All rights reserved.

TD17-LEL-122011