

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not be readily subject to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than intended use.
- Servicing of this equipment should be performed by qualified personnel.

SAVE THESE INSTRUCTIONS

Applications

Metrex Egress MET Series wall surface mount unit equipment for high abuse environments. See fixture label for restrictions.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. FOLLOW ANY SPECIFIC INSTRUCTIONS ON LUMINAIRE LABELS.

120VAC Installation (Fig.1)

- Connect the WHITE wires from the BATTERY HEATER to COMMON.
- Connect one RED wire from the THERMOSTAT to the BLACK wire from the BATTERY HEATER.
- Connect the second RED wire from the THERMOSTAT to 120VAC supply.

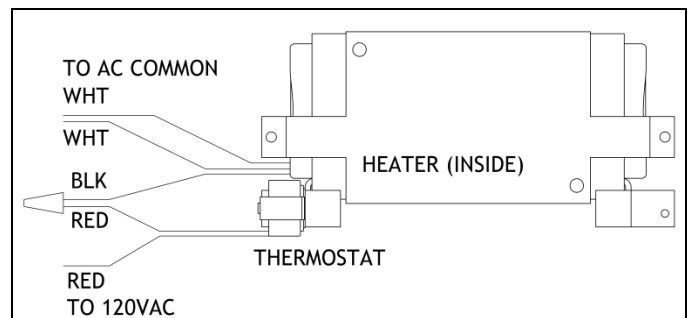


Figure 1

277VAC Installation (Fig.2)

- Connect one WHITE wire from the BATTERY HEATER to COMMON.
- Cap off the BLACK wire from the BATTERY HEATER.
- Connect one RED wire from the THERMOSTAT to the second WHITE wire from the BATTERY HEATER.
- Connect the second RED wire from the THERMOSTAT to 277VAC supply.

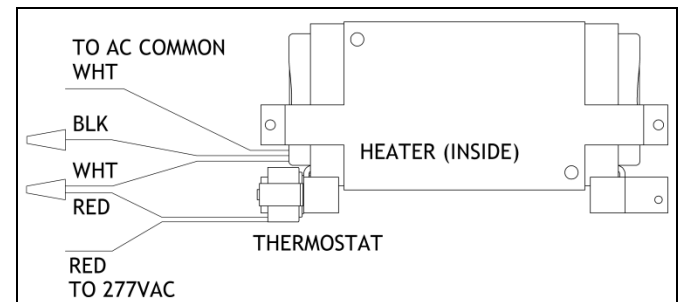


Figure 2

Battery Maintenance (Fig.3)

- To remove battery, remove (2) screws securing BATTERY RETAINER BRACKET. Remove bracket.
- Unwrap the foil lined fiberglass INSULATION from the BATTERY. There is no need to remove the INSULATION.
- Installation is the reverse of removal.

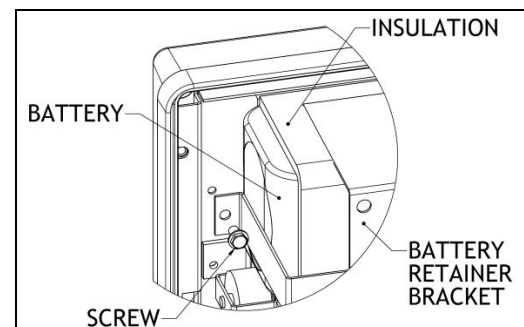


Figure 3