PROGRAM MODE	
	SEQUENTIAL (WITHOUT DIMMING)
X	INDIVIDUAL CONTROL (WITH DIMMING)

LOW-VOLTAGE WALL / BED CONTROL SWITCH

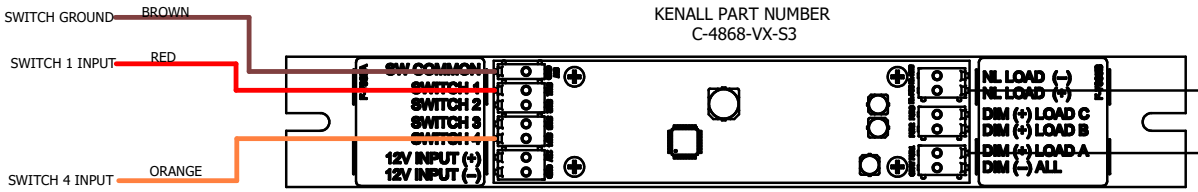

KENALL PART NUMBER
C-4868-VX-S3

LOAD A CONTROL	
X	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

LOAD B CONTROL	
	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

LOAD C CONTROL	
	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

NIGHT LIGHT OUTPUT	
X	NIGHT LIGHT

NOTE: CONTROL OF LOADS A, B AND C IS VIA 0-10V DIMMING SIGNAL.
THE RANGE OF DIMMING AVAILABLE IS BASED ON THE CAPABILITY OF THE CONNECTED DRIVER.
PLEASE REFER TO THE KENALL PRODUCT SPECIFICATION SHEET FOR DETAILS OF DIMMING RANGE.

Operational Table for INDIVIDUAL Control for All Loads (with Dimming), with Night Light

Lighting Output Level and Switching Sequence			
Switch Input	**First Toggle (Short Press)**	**Subsequent Sustained Closes of Switch Input (Long Press)**	**Second Toggle (Short Press)**
1	Load A 100%	Load A Dimming Sweeps High → Low → High	Load A 0%
2	(Not Connected)		
3	(Not Connected)		

Switch Input	**First Toggle**	**Second Toggle**	**Third Toggle**	**Fourth Toggle**
4	Night Light 12%	Night Light 50%	Night Light 100%	Night Light 0%

DRAWN:	DATE:
jllamas	11/17/2020

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

This document contains information that is privileged, confidential or otherwise protected from use and disclosure. You are hereby notified that any review, disclosure, copying, dissemination or taking of any action in reliance on its contents or other use is strictly prohibited. This document and its contents are confidential proprietary information of Kenall Manufacturing.

KENALL
10200 55th Street
Kenosha, WI 53144

DESCRIPTION
INSTR; WIRING LVCX (LVCD) A/-/-/INDIVIDUAL CONTROL (WITH DIMMING, WITH NIGHT LIGHT)

SIZE	PART NO:	SHEET:	REV
B	F-8045	1 OF: 1	0

SCALE: ---

DO NOT SCALE DRAWING