PROGRAM MODE	
	SEQUENTIAL (WITHOUT DIMMING)
	INDIVIDUAL CONTROL (WITH DIMMING)
X	INDIVIDUAL CONTROL (WITHOUT DIMMING)

LOW-VOLTAGE WALL / BED CONTROL SWITCH

SWITCH GROUND — BROWN

SWITCH 1 INPUT — RED

KENALL PART NUMBER
C-5000-VX-S4

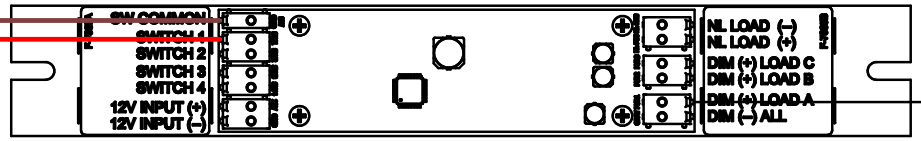

LOAD A CONTROL	
X	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

LOAD B CONTROL	
	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

LOAD C CONTROL	
	AMBIENT
	READING
	EXAM
	CHART LIGHT
	OTHER

NIGHT LIGHT OUTPUT	
	NIGHT LIGHT

NOTE: CONTROL OF LOADS A, B AND C IS VIA 0-10V DIMMING SIGNAL.
THE RANGE OF DIMMING AVAILABLE IS BASED ON THE CAPABILITY OF THE CONNECTED DRIVER.
PLEASE REFER TO THE KENALL PRODUCT SPECIFICATION SHEET FOR DETAILS OF DIMMING RANGE.

Operational Table for INDIVIDUAL Control for all Loads (without Dimming), without Night Light

Switch Input	Lighting Output Level and Switching Sequence			
	First Toggle	Second Toggle	Third Toggle	Fourth Toggle
1	Load A 100%	Load A 0%	-	-
2	(Not Connected)			
3	(Not Connected)			
4	(Not Connected)			

DRAWN: jllamas	DATE: 12/10/2020
CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	

This document contains information that is privileged, confidential or otherwise protected from use and disclosure. You are hereby notified that any review, disclosure, copying, dissemination or taking of any action in reliance on its contents or other use is strictly prohibited. This document and its contents are confidential proprietary information of Kenall Manufacturing.

KENALL
10200 55th Street
Kenosha, WI 53144

DESCRIPTION
INSTR; WIRING LVCX (LVC) A/-/-/INDIVIDUAL CONTROL (WITHOUT DIMMING, WITHOUT NIGHT LIGHT)

SIZE	PART NO:	SHEET:1 OF:1	REV
B	F-8060		0

SCALE: ---

DO NOT SCALE DRAWING