

SPG18 & TD17 Parking Luminaires *With TekLink Image Sensing*

LED Parking Luminaires
with Image Sensors

TR



A brand of  **legrand**

REVAL

SenScape SPG18: Low Profile Design & Industry-Leading Uplight



Dimensions



SenScape SPG18 Series

- Delivered lumen range: 3,047 – 13,680 lm
- Input power range: 35 – 139W
- Efficacy: 74 – 129 lm/W
- TekLink™ controls compatible: embedded microwave sensor with an industry exclusive Peace of Mind Guarantee®
- TL2000PS option provides car counting and license plate recognition
- Standard & enhanced uplight options; 100% downlight version also available
- Optical patterns designed specifically for covered parking, canopy and low bay applications

Nominal sizes: 18" Diameter
Installation types: Direct-to-surface, quick-mount, trunnion or pendant-mount
Lamp Type: LED



Option

Polycarbonate Lens &
Direct Surface Mount Only



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details.

Kenall's Popular Parking Garage Fixtures Now with TekLink™ TL2000PS Parking Suite



SenScape™



TekDek™

 **99%**
Car Counting Accuracy

Your All-in-One-Solution

-  *Lighting*
-  *Car Counting*
-  *Lighting Controls*
-  *License Plate Recognition*


SenScape SPG18 and TekDek TD17 luminaires with TekLink TL2000PS are the only parking fixtures to incorporate car counting and license plate recognition technology using an embedded image sensor.

For more information on TekLink lighting controls, visit kenall.com

TekDek TD17: Dropped Lens Featuring Best-in-Class Glare Control & Lumen Packages Tailored to Your Needs



Dimensions

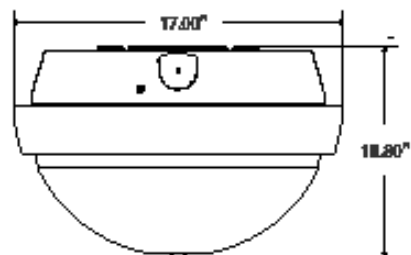

TekDek TD17 Series

- Delivered lumen range: 4,080 – 14,7866 lm
- Input power range: 36 – 105W
- Efficacy: 74 – 152 lm/W
- TekLink™ controls compatible: embedded microwave sensor with an industry exclusive Peace of Mind Guarantee®
- TL2000PS option provides car counting and license plate recognition
- Textured tertiary lens for glare reduction; uplight feature to eliminate “cave effect”
- Variety of distribution options

Nominal sizes: 17" Diameter
 Installation types: Direct-to-surface, quick-mount, trunnion or pendant-mount
 Lamp Type: LED



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details.

Simple to Sophisticated: TekLink Controls Configured for Every Installation

| Features | TekLink Cloud | | | | |
|--------------------------------------|--------------------|---------------------|--------------------|--------------------|--------------|
| | TL50 | TL100 | TL1000 | TL2000 | TL2000PS |
| Sensor Technology | Microwave/Infrared | Infrared/Ultrasonic | Infrared/Microwave | Infrared/Microwave | Image Sensor |
| Wireless Communication | | | | √ | √ |
| Adjustable Occupancy Time-Out | √ | √ | √ | √ | √ |
| Daylight Feedback | √ | √ | √ | √ | √ |
| Adjustable Dim-Level | √ | √ | √ | √ | √ |
| Zonal Control | | √ | √ | √ | √ |
| One Touch Light Level Commissioning* | | √ | √ | √ | √ |
| L70 Detection* | | √ | √ | √ | √ |
| Scheduling | | | √ | √ | √ |
| Reporting | | | √ | √ | √ |
| Car Counting | | | | | √ |
| License Plate Recognition | | | | | √ |

*Patent No: US 20120153840

Listings, Certifications, Warranties

Fixtures designed for use in public settings must satisfy a large number of demanding lighting and environmental requirements. Listings applicable to these requirements are shown below. Please refer to the www.kenall.com to determine product specific listings.



DesignLights Consortium — The DLC is an organization that certifies the accuracy and completeness of fixture performance data, which then allows building owners to qualify for certain utility and government rebates.



ETL—A product bearing the ETL Listed mark is determined to have met the minimum requirements of prescribed product safety standards as certified by a Nationally Recognized Testing Laboratory (NRTL). The mark also indicates that the manufacturer's production site conforms to a range of compliance measures and is subject to periodic follow-up inspections to verify continued conformance.



IP65 — UL Certified IP65 per IEC 60598 ensures that the enclosure is dust-tight and protected against jet streams of water from any direction without any harmful effects.



IP66 — UL Certified IP66 per IEC 60598 ensures that the enclosure is dust tight and protected against water projected in powerful jets without any harmful effects.



3G—Products bearing the 3G listing are independently tested for vibration, wind and shock according to ANSI Standard C136.31-2001 ensuring their ability to withstand the environmental challenges of tunnels.



Peace of Mind Guarantee

Kenall's High Abuse luminaires are designed and built to take exceptional physical punishment. When installed according to our instructions, Kenall will repair or replace any unit rendered inoperable due to physical abuse for the normal service life of the fixture.



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details.



10200 55th Street
Kenosha, WI 53144
262-891-9700
www.kenall.com

©2019 Kenall Mfg. Co.
All rights reserved.
M-0003 110519