


MEDMASTER CLEANSCENE™

CS SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount – grid; 4'x4'
- » Expansive offering of high quality graphic images
- » Antimicrobial finish option available
- » Regressed frame kit available for even more aesthetic appearance

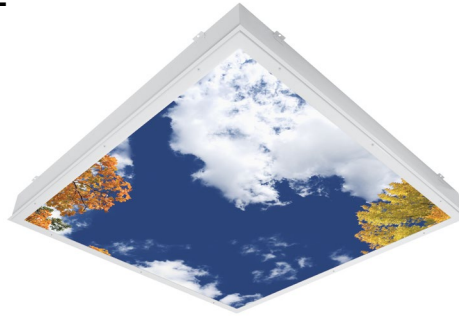

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS. Hole-free one-piece seam welded construction. White TGIC polyester powder coat standard – 5-stage pre-treatment. Salt spray test: 1,000 hours. Flange/Surface mounting – antimicrobial finish optional on all exposed painted surfaces of installed luminaire.

DOORFRAME: 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat standard – 5-stage pre-treatment. Salt spray test: 1,000 hours. Antimicrobial finish optional on all exposed painted components of installed luminaire. Doorframe secured to housing with aircraft cables and 8 captive mounted Phillips-head stainless steel fasteners. Closed cell Neoprene/EPDM/SBR gasket seals doorframe to housing.

LENS: .177" acrylic lens secured with continuous lens retention system.

REGRESSED FRAME KIT (ACCESSORY): One-piece, .08" thick, seamless aluminum construction TGIC polyester powder coat finish in matte white or black. Provides easy-to-install, architectural skylight effect by raising fixture 2-inches above standard 1" or 1.5" T-bar grid ceiling.

ELECTRICAL: High-brightness, 6500K LED light source. 120-277VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (0.95 PF). Standard 0-10V dimming with 1-100% range; 250µA maximum source current. EMC meets FCC Part 15, Class A limits. Consult factory for fluorescent options.

INSTALLATION: Designed for 1" and 1.5" grid. (Housing includes hanging brackets to secure housing with wire to super structure).

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone.





ORDERING INFORMATION (Ex: CS44-G10-1-26L65K-120-PAFW-PAH-AMF-RFK44W)

Model	Mounting	Lamp Qty	Lamp Type	Voltage	Frame Type	Housing Option	Options	Accessory	Image Selection
CS44		1	26L65K			PAH			
Mounting Options				Voltage		Housing Options		Accessory	
G10 Grid (1")				120 120 Volts		PAH .050" Painted Aluminum		RFK44W Regressed Frame Kit – White	
G15 Grid (1.5")				277 277 Volts				RFK44B Regressed Frame Kit – Black	
Lamp Quantity				DV 120-277 Volts		Options		Image Selection	
1 One System						AMF Antimicrobial Finish (All Exposed Surfaces)		Click here for CleanScene lightbox image selections and ordering numbers. Consult factory for alternate image selection approval.	
Lamp Type				Frame Type		BLK Black Doorframe			
26L65K 26 Watt 6500K LED				PAFB Black Painted Aluminum					
				PAFW White Painted Aluminum					

* n/a with Dual Voltage (DV)

DIMENSIONAL DATA

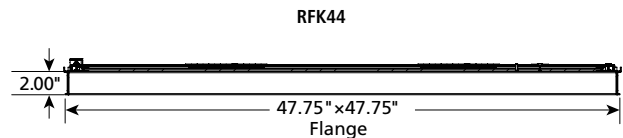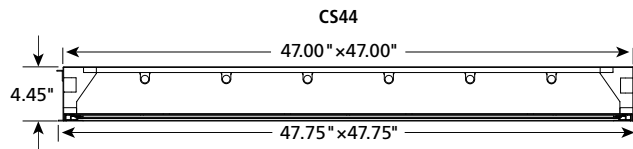

GRAPHIC IMAGE SIZE NEEDED – 4x4 FIXTURE

Grid 1.0 (G10) 44.575" x 44.575"

Grid 1.5 (G15) 44.075" x 44.075"

*Subtract .50" from housing width and length when 1.5" grid mounting option is specified.



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.