

SIMPLESEAL™

CSEDI SERIES – HIGH OUTPUT LED – INSET DOOR

PRODUCT FEATURES:

- » High-output, high-CRI LED lamp sources for accurate color rendition and lighting performance
- » Diffused high-efficiency lens for reduced glare
- » Recessed ceiling mount; grid or flange
- » Suitable for universal installation into 1.0" and 1.5" grid or flange (drywall) ceilings
- » One piece inset doorframe, secured to housing with aircraft cables



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS. Hole-free, one-piece, seam-welded construction. Integral aluminum heat sink for thermal dissipation. 18-gauge housing flange with mitered and welded corners. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

DOORFRAME: 18-gauge CRS. One-piece inset-style construction with welded corners. Gloss white TGIC polyester powder coat finish with 5-stage pre-treatment. Doorframe secured to housing with stainless steel aircraft cables and captive, flush-mounted Phillips-head fasteners. Closed-cell silicone gasket seals doorframe to lens.

OPTICS: Textured or frost acrylic inner lens with clear polycarbonate outer lens.

DOORFRAME GASKET: Closed-cell silicone gasket seals Doorframe to Housing.

ELECTRICAL: Available 4000K and 5000K color temperatures with maximum 5-step MacAdam variation allowance. 277VAC or 347VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 10-100% range.

INSTALLATION: Non-IC recessed ceiling mounting into grid and flange application types. Flange installation utilizes included adjustable swing-out mounting brackets. Grid installation suitable for 1" and 1.5" T-bar ceilings. Housing is field-convertible between grid and flange-style mounting types. See Options for install frames.

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: Luminaire is certified to UL standards by Intertek Testing Laboratories for Wet Location. Certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. CCEA Approved. Meets requirements for FED-STD-209E/Class 1 (ISO 3) Cleanrooms. Suitable for installation into -30°C to 40°C ambient environments, unless otherwise noted.



ORDERING INFORMATION (Ex: CSEDI-2424-192L-40K8-DIM10-277-2F-2H-TA-W)

Model	Size	Lamp Power	Lamp Color	Driver	Voltage	Doorframe	Housing	Optics	Options	Accessories
CSEDI	2424			DIM10						
	Size 2424 2' x 2'			Driver Type DIM10 0-10V Dimming to 10%			Housing Options 2H 20-Ga CRS (STD) 5H 20-Ga Type 304 SS PAH .050" Painted Aluminum			
	Lamp Power 192L 192 Watt LED 295L 295 Watt LED			Voltage 277 277VAC 347 347VAC			Optics TA-W Textured Acrylic with Wide Distribution FA-N Frosted Acrylic with Narrow Distribution			
	Lamp Color 40K7 4000K / 70CRI min. 40K8 4000K / 80CRI min. 50K7 5000K / 70CRI min. 50K8 4000K / 80CRI min.			Doorframe Options 2F 20-Ga CRS (STD) 5F 20-Ga Type 304 SS XF 20-Ga Type 316 SS AF Anodized Aluminum PAF .063" Painted Fabricated Aluminum			Options LEL 20W Integral Emergency Battery Backup (N/A 347V) AMF Antimicrobial Finish FS Fuse & Holder HJ Sealed Wireway IF Install Frame (drywall ceilings only)			



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

CSEDI-2424-101618

SIMPLESEAL™


CSEDI SERIES – HIGH OUTPUT LED – INSET DOOR

PERFORMANCE

Optic Type	Lamp Power	Initial Delivered Lumens, By Lamp Color				Efficacy (lm/W)	Input Power (W)	Estd. L70 LED Life (hrs)
		40K8	40K7	50K8	50K7			
TA-W	192L	24,287	25,625	24,287	26,550	109 - 120	222	125,000
	295L	32,487	34,277	32,487	35,514	99 - 109	327	125,000
FA-N	192L	25,079	26,461	25,079	27,416	113 - 123	222	90,000
	295L	33,547	35,395	33,547	36,672	103 - 112	327	90,000


Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric data, please go to www.kenall.com.

Model: CSEDI-2424-295L-40K7-DIM10-xxx-yyy-zzz-TA-W






Max Candela = 13681 Located At Horizontal Angle = 45, Vertical Angle = 37.5
 1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (37.5) (Through Max. Cd.)

Model: CSEDI-2424-295L-40K7-DIM10-xxx-yyy-zzz-FA-N



Max Candela = 21220 Located At Horizontal Angle = 0, Vertical Angle = 0
 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

DIMENSIONAL DATA

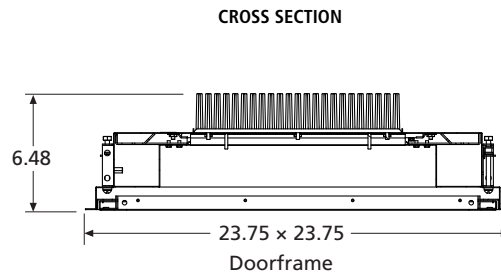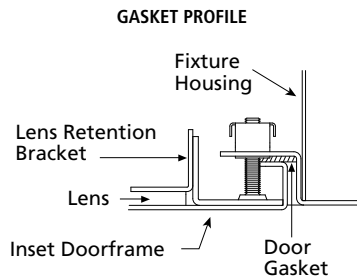

* Add .375" to ceiling cut out dimensions when IF Option is specified



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

CSEDI-2424-101618