

SIMPLESEAL™

CSEDI SERIES – LED – INSET DOOR

PRODUCT FEATURES:

- » High-output, high-CRI LED lamp sources for accurate color rendition and lighting performance
- » Diffused high-efficiency lens for reduced glare
- » Recessed ceiling mount; grid or flange - 1'x4', 2'x2', 2'x4'
- » Suitable for universal installation into 1.0" and 1.5" grid or flange (drywall) ceilings
- » One piece inset doorframe, secured to housing with aircraft cables

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____



SPECIFICATIONS

HOUSING: Standard 24-gauge (optional 20-gauge) cold rolled steel, hole-free, one-piece, seam-welded construction. 18-gauge housing flange with mitered and welded corners. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

DOORFRAME: 18-gauge CRS. One-piece inset-style construction with welded corners. Gloss white TGIC polyester powder coat finish with 5-stage pre-treatment. Doorframe secured to housing with stainless steel aircraft cables and captive, flush-mounted Phillips-head fasteners. Closed-cell silicone gasket seals doorframe to housing.

OPTICS: Symmetric optic includes diffused, impact-resistant acrylic lens.

ELECTRICAL: Available 3500K, 4000K and 5000K color temperatures with maximum 3-step MacAdam variation allowance. 120-277VAC and 347VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 1-100% range with dim to dark capabilities (non dim-to-dark with 347V; 660µA maximum source current). Optional 0-10V dimming with 0.1-100% range and dim-to-dark capabilities via eldoLED SOLoDrive series driver (n/a 347V input; <0.5V required from dimming control for dim-to-dark operation; 800µA max. source current).

INSTALLATION: Non-IC recessed ceiling mounting into grid and flange application types. Flange installation utilizes included adjustable swing-out mounting brackets. Grid installation suitable for 1" and 1.5" T-bar ceilings. Universal installation into grid or flange (drywall) ceiling applications. See Options for continuous row mounting and install frames.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard. For additional photometric data, please go to www.kenall.com

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: Luminaire is certified to UL standards by Intertek Testing Laboratories for Wet Location. Certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. CCEA Approved. Suitable for biosafety labs rated BSL 1 and 2. Meets K230 Leakage Standard for luminaire leakage in pressurized environments and FED-STD-209E/Class 1 (ISO 3) Cleanrooms. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC listed. Please check the DLC Qualified Products List [here](#) for listed configuration details. Suitable for EU GMP Grade A cleanrooms. Suitable for installation into -30°C to 40°C ambient environments, unless otherwise noted.



ORDERING INFORMATION (Ex: CSEDI-24-67L-40K8-DIM1-DV-2F-4H-SYM)

Model	Size	Lamp Power	Lamp Color	Driver	Voltage	Doorframe	Housing	Optics	Options	Accessories
CSEDI										SYM
Size		Lamp Power		Driver Type				Options		
14 1'x4'		1'x4'		DIM1 0-10V Dimming to 1%				LEL † 8.4W Emergency Battery Pack		
22 2'x2'		45L 45 Watt LED		DIM01 0-10V Dimming to 0.1% (n/a with 347V)				20KV 20KV/KA Surge Protection per IEEE/ANSI C62.41.2 Cat. A		
24 2'x4'		67L 67 Watt LED		Voltage				AMF ▲ Antimicrobial Finish		
		90L 90 Watt LED		DV 120-277VAC, 50/60Hz				FS Fuse & Holder		
		2'x2'		120 120VAC				HJ Sealed Wireway		
		45LD 45 Watt Dual-Row LED		277 277VAC				MS Motion Sensor (n/a with 347 Voltage Option)		
		67L 67 Watt LED		347 347VAC				RF • Radio Frequency Filter		
		90L 90 Watt LED		Doorframe Options				RM † Continuous Row Mounting		
		2'x4'		5F 20-Ga Type 304 SS Brushed				2C Two Circuit Wiring (1'x4'-45L single circuit operation will yield uneven lens luminance)		
		45LD 45 Watt Dual-Row LED		2F 18-Ga CRS (STD)				Accessories		
		67L 67 Watt LED		AF Anodized Aluminum				IF *† Install Frame		
		90L 90 Watt LED		PAF Painted Fabricated Aluminum						
		135L 135 Watt LED		Housing Options						
		180L 180 Watt LED		4H 24-Ga CRS (STD)						
		Lamp Color		2H 20-Ga CRS						
		35K8 3500K / 82 CRI min.		5H 20-Ga Type 304 SS						
		40K8 4000K / 82 CRI min.		PAH .050" Painted Aluminum						
		50K8 5000K / 82 CRI min.		Optics						
				SYM Symmetric, Diffused DR Acrylic						

Click [HERE](#) for CSEDI 'Fast Track' Ordering Options
Ships in 5 days



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **Legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

SIMPLESEAL™**CSEDI SERIES – TECHNICAL DATA**

PERFORMANCE		Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
Model	Lamp Type	@ 25°C	Efficacy (lm/W)			
CSEDI14	45L-35K8	5,491	112	49	100	80,000
	45L-40K8	5,587	114	49	100	80,000
	45L-50K8	5,811	119	49	100	80,000
	67L-35K8	8,412	117	72	75	80,000
	67L-40K8	8,559	119	72	75	80,000
	67L-50K8	8,901	124	72	75	80,000
	90L-35K8	10,732	110	98	100	60,000
	90L-40K8	10,920	111	98	100	60,000
CSEDI22	45LD-35K8	5,311	108	49	100	80,000
	45LD-40K8	5,404	110	49	100	80,000
	45LD-50K8	5,620	115	49	100	80,000
	67L-35K8	8,136	113	72	75	80,000
	67L-40K8	8,278	115	72	75	80,000
	67L-50K8	8,609	120	72	75	80,000
	90L-35K8	10,454	107	98	100	60,000
	90L-40K8	10,637	109	98	100	60,000
CSEDI24	90L-50K8	11,062	113	98	100	60,000
	45LD-35K8	6,238	136	46	50	100,000
	45LD-40K8	6,347	138	46	50	100,000
	45LD-50K8	6,601	143	46	50	100,000
	67L-35K8	8,677	121	72	75	80,000
	67L-40K8	8,828	123	72	75	80,000
	67L-50K8	9,181	128	72	75	80,000
	90L-35K8	11,149	114	98	100	60,000
	90L-40K8	11,344	116	98	100	60,000
	90L-50K8	11,798	120	98	100	60,000
	135L-35K8	15,805	108	147	100	60,000
	135L-40K8	16,081	109	147	100	60,000
	135L-50K8	16,724	114	147	100	60,000
	180L-35K8	21,550	110	196	100	60,000
180L-40K8	21,927	112	196	100	60,000	
180L-50K8	22,804	116	196	100	60,000	

Displayed information is for selected luminaires only. Additional wattages and color temperatures are also available. Visit www.kenall.com for additional information.



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of Legrand


This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

SIMPLESEAL™

CSEDI SERIES – TECHNICAL DATA


PERFORMANCE

Model: CSEDI-14-67L-40K8-DIM1-DV-2F-2H-SYM




Maximum Candela = 3616 Located At Horizontal Angle = 15, Vertical Angle = 5
 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

Model: CSEDI-22-90L-40K8-DIM1-DV-2F-2H-SYM




Max Candela = 4304 Located At Horizontal Angle = 0, Vertical Angle = 0
 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: CSEDI-24-180L-40K8-DIM1-DV-2F-2H-SYM



Max Candela = 8620 Located At Horizontal Angle = 0, Vertical Angle = 5
 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

DIMENSIONAL DATA

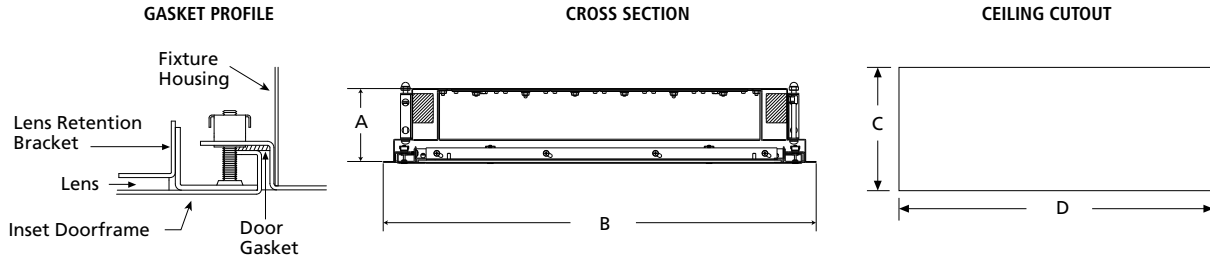

DIMENSIONAL DATA (IN INCHES & CENTIMETERS)

	A	B	C	D
12x48	4.20	11.75 x 47.75	10.85	46.85
30.48cm x 121.92cm	10.67	29.85 x 121.29	27.56	119.00
24x24	4.20	23.75 x 23.75	22.85	22.85
60.96cm x 60.96cm	10.67	60.33 x 60.33	58.04	58.04
24x48	4.20	23.75 x 47.75	22.85	46.85
60.96cm x 121.92cm	10.67	60.33 x 121.29	58.04	119.00

* Add .375" (.95cm) to ceiling cut out dimensions when IF Option is specified

** Height is 5.875" (15 cm) with LEL option



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**