


SIMPLESEAL™

CSESTD SERIES – LF SURFACE MOUNT – TEAR DROP

PRODUCT FEATURES:

- » Surface ceiling mount – 2', 3', 4' and 8' lengths
- » Tandem wiring for 8' runs
- » Independent lab tested to Fed-Std 209E/Class 1 (ISO 3) cleanrooms

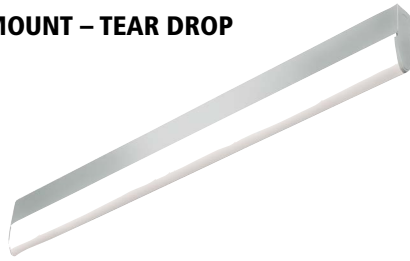

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS:

HOUSING: 20-gauge CRS with white TGIC polyester powder coat finish – 5-step pre treatment; laboratory salt spray test: 1,000 hours (standard). Optional housing materials and finishes: .063" marine grade aluminum with white TGIC polyester powder coat finish – 5-step pre-treatment; laboratory salt spray test: 1,000 hours (AL). 20-gauge type 304 stainless steel with #4 finish (5H). 20-gauge type 316 stainless steel with #4 finish (XH).

END CAPS: Match housing material and finish.

LENS: .125" acrylic lens. Lens orientation – smooth side out. See Ordering Information for alternate lens selections.

ELECTRICAL: Electronic ballast <10% THD standard. See Ordering Information for alternate or multiple ballasts and optional equipment. Lamps by others.

INSTALLATION: Four .312" holes for surface mounting (see Installation Details).

WARRANTY: Limited one (1) year Kenall fluorescent warranty.

LISTINGS: UL and CUL Listed for Damp Locations. Independent Lab tested to FED-STD 209E/Class 1 (ISO 3) Cleanrooms.




ORDERING INFORMATION (Ex: CSESTD-24-2H-1-17-IS-1-120-T)



Model	Length	Housing	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Lens Type	Options
CSESTD									
	Length		Lamp Quantity		Ballast Type			Lens Type	
	24 2'		1 One		IS Instant Start Electronic <10% THD (T8)			T Internally Ribbed Clear	
	36 3'		2 Two (Tandem 8' only)		RS Rapid Start Electronic <10% THD (Biax,T8)			P Internally Ribbed Opal	
	48 4'				SB Specified Ballast				
	96 8' (Tandem)			Lamp Type				Options	
				17 F17T8 (2' only)	Ballast Quantity			EL One Lamp Battery Pack (32°F)	
				25 F25T8 (3' only)	1 One			FS Fuse & Holder	
				32 F32T8 (4' & 8' only)	2 Two				
	Housing Material				Voltage				
	2H 20-CRS (Standard)				120 120 Volt				
	5H 20-Ga Type 304 SS				277 277 Volt				
	XH 20-Ga Type 316 SS				347 347 Volt				
	AL Marine Grade Aluminum								

DIMENSIONAL DATA

CROSS SECTION

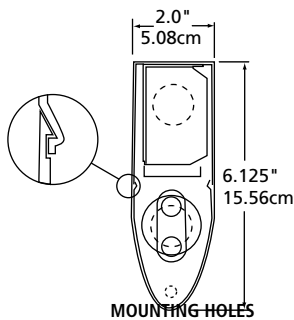

38" (96.52cm) (48" (121.92cm) Unit)
 26" (66.04cm) (36" (91.44cm) Unit)
 14" (35.56cm) (24" (60.96cm) Unit)

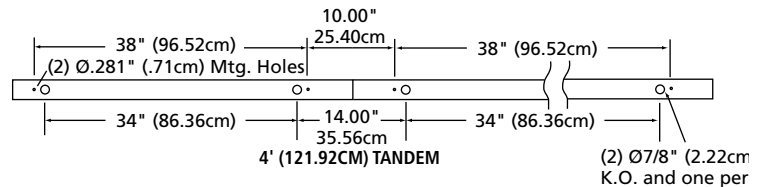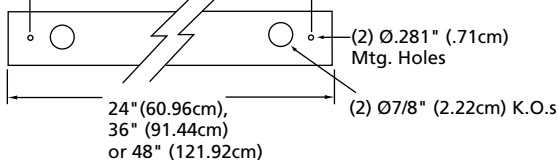

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.