

MEDMASTER CLEANSCENE™

CSMEC SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount – grid; 4'x4'
- » High quality graphic images
- » Antimicrobial finish standard
- » Asymmetric exam compartments for optimal patient exam lighting



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 18-gauge aluminum. Hole-free seam welded construction. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

DOORFRAME: 18-gauge aluminum. One-piece inset construction, welded corners. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Internal hinge design. Twelve (12) captive mounted Phillips-head stainless steel fasteners. Antimicrobial finish standard on all exposed painted components of installed luminaire. Closed cell silicone gasket seals doorframe to housing.

LENS: Graphic section - smooth, .177" clear acrylic; exam sections - smooth, .125" clear acrylic.

ELECTRICAL: **EXAM FL:** Fluorescent, electronic 120/277V ballasts, high power factor (<10% THD) standard. Exam compartments available with two F54T5HO or F55TT lamps per side and supplied with rapid start ballast. **GRAPHIC (FL/LED):** Graphic compartment available with four T5/T5HO lamps or 6500K, high-brightness LEDs. 6500K fluorescent lamps recommended in graphic compartment for best image rendition (lamps by others). LED System: 120/277V, high power factor driver (<20% THD); input power 116 watts; dimming capability; internal feedback control ensures uniform light output and longevity.

INSTALLATION: 1" or 1.5" T-Bar installation standard. Housing includes hanging brackets to secure housing with wire to super structure.

WARRANTY: Limited five (5) year LED warranty.


LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory.



ORDERING INFORMATION (Ex: CSMEC-G10-54-26L65K-277-FS-C117)

Model	Mounting	Exam Lamp Type	Graphic Lamp Type	Graphic Ballast Type	Voltage	Options	Image Selection
CSMEC							
	Mounting Options G10 Grid (1") G15 Grid (1.5")	Exam Lamp Type 54 F54T5HO 55B F55TT	Graphic Lamp Type 28 F28T5 (n/a with DM10 ballast) 54 F54T5HO (Available with DM7 or DM10 ballast only) 26L65K** 26W HB White LED (6500K)	Graphic Ballast Type (n/a for LED) RS Rapid Start Electronic <10% THD DM7 Low Voltage Electronic Dimming Ballast DM10 Line Voltage Electronic Dimming Ballast	Voltage 120 120 Volts 277 277 Volts	Options FS Fuse & Holder RF Radio Frequency Filter	Image Selection Click here for CleanScene lightbox image selections and ordering numbers. Selected image must be marked for D1V usage. Consult factory for alternate image selection approval. ** Available with LED driver only. Enter "N/A" as Graphic Ballast Type selection.

DIMENSIONAL DATA

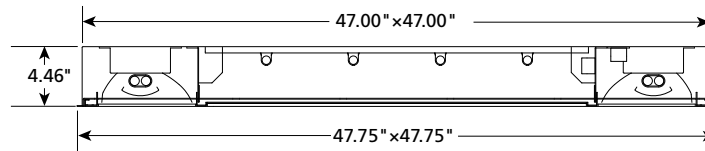

Subtract .50" from housing width and length when 1.5" grid mounting option is specified.

GRAPHIC IMAGE SIZE NEEDED

Grid 1.0 (G10) 28.300x44.575
Grid 1.5 (G15) 27.800x44.075



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**