

MILLENNIUM FREESCALE™

FS848 SERIES

PRODUCT FEATURES:

- » Surface mount – wall or ceiling; 12"W×53"H×6"D
- » Marine grade aluminum baseplate
- » Round or Triangle 100% DR acrylic lens options with multiple lens frame styles
- » UL certified IP65 per IEC 60598



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

BASEPLATE: Die-formed marine grade aluminum; welded corners. Baseplate provided with six-point mounting holes, one wireway hole – see Cross Section/Details. TGIC Polyester powder coat – 5-stage pre-treatment; Salt spray test: 1,000 hours.

REFLECTOR: Die-formed marine grade aluminum. Full reflector/wire cover – 92% reflectivity.

LENS: UV-stabilized, high impact resistant, pressure formed pearlescent 100% DR acrylic. Nominal thickness .125". Lens secured in place by lens frame and sealed to baseplate with closed cell silicone gasket.

LENS FRAME/CROSS BARS: Marine grade aluminum; secured to baseplate with tamper-resistant stainless steel Torx® with center pin fasteners. Cross bars nominal thickness .25". Post assembly TGIC polyester powder coat – 5-stage pre-treatment; Salt spray test: 1,000 hours. Optional perf insert 30% open, stainless steel. See Ordering Information for standard, optional, architectural, and custom finishes.

HARDWARE: Six stainless steel Torx® with center pin fasteners. Internal brackets and fasteners are non-corrosive. Surface Conduit Adapter (SCA) accessory – stainless steel trim frame assembly with integral J-box; finished to match lens frame (n/a with CA finish). Water-tight conduit fittings supplied by others. Rough Service Adapter (RSA) accessory – stainless steel plate (adds .625" height) finished to match lens frame (n/a with CA finish). Stainless steel fasteners provided for mounting fixture to RSA or SCA.

ELECTRICAL: LED: Available 3500K, 4000K and 5000K color temperatures, 82 CRI. 120-277VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 10-100% range, maximum driver source of 500 µA. LE: Fluorescent magnetic ballasts – 120-277V power factor corrected, fluorescent electronic 120-277V and dual voltage ballasts high power factor (<10% THD).

INSTALLATION: Standard six-point mounting required for Peace of Mind Guarantee®.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty.


LISTINGS: UL and CUL listed for Wet Location. UL certified IP65 per IEC 60598.



ORDERING INFORMATION (Ex: FS848R-3E-PIA-MB-67L40K-1-277-FS)

Model	Lens Frame	Lens Type	Finish	Lamp Type	Lamp Qty	Voltage	Options	Accessories
Model				Lamp Type (Qty/Ballast/Volt./Starting Temp)			Options	
FS848R Round				67L35K 67 Watt 3500K LED			CEL ▲ One Lamp Emergency Pack (0°F) with deep housing surface adapter (120-277V only)	
FS848T Triangle				67L40K 67 Watt 4000K LED			EL ▲ One Lamp Emergency Pack (32°F) 347V available with F32T8 only and Includes deep housing surface adapter.‡	
				67L50K 67 Watt 5000K LED			FS Single Fuse & Holder (n/a w 347V)	
Lens Frame				28* F28T5 (1,2,3/RS/120,277,347/0°F)			PH Phillips Head Fasteners	
0 No Bars				32 F32T8 (1,2/IS/120,277,347/0°F)			PC ‡ Photo Control with deep housing surface adapter (n/a with 347V or DV)	
1M One Bar – Middle				44 F48T8HO (1/RS/120,277/-20°F)				Accessories
2M Two Bars – Middle				54 F54T5HO (1,2/RS/120,277,347/0°F)				SCA ▼ Surface Conduit Adapter
2TB Two Bars – Top & Bottom								RSA ▼ Rough Surface Adapter
2TBP Two Horizontal Bars w/Perf								9500 Torx® Screwdriver
3E Three Bars – Even Spaced								D-0552 Torx® Driver Bit
4TB Four Bars – Top & Bottom								
				Lamp Quantity (See Lamp Type)				
				1 One Lamp				
				2 Two Lamps				
				3 Three Lamps				
				Voltage				
				120 120 Volts				
				277 277 Volts				
				347▲ 347 Volts				
				DV 120-277 Volts				
Lens Type								
PIA Pearlescent High Impact 100% DR Acrylic								
MPA Matte Pearlescent High Impact 100% DR Acrylic								
Finish								
BR Bronze								
DB Dark Bronze								
CS Cool Satin Aluminum								
FG Forest Green								
LG Light Gray								
MB Matte Black								
MW Matte White								
WS Warm Satin Aluminum								
CC Custom Color (Consult factory)								

LENS FRAME



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

MILLENIUM FREESCALE™


FS848 SERIES – Technical Data

PERFORMANCE

Lamp Type	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
	@ 25°C	Efficacy (lm/W)			
67L35K	5061	68	74	66	80,000
67L40K	5396	73	74	66	80,000
67L50K	5612	76	74	66	80,000

Displayed info is for PIA lens only. Infor subject to change. Visit www.kenall.com for IES files and additional information.


Model: FS848T-2TB-PIA-MB-67L40K-DV



Maximum Candela = 1118 Located At Horizontal Angle = 202.5, Vertical Angle = 5

- 1 - Vertical Plane Through Horizontal Angles (202.5-22.5) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

DIMENSIONAL DATA

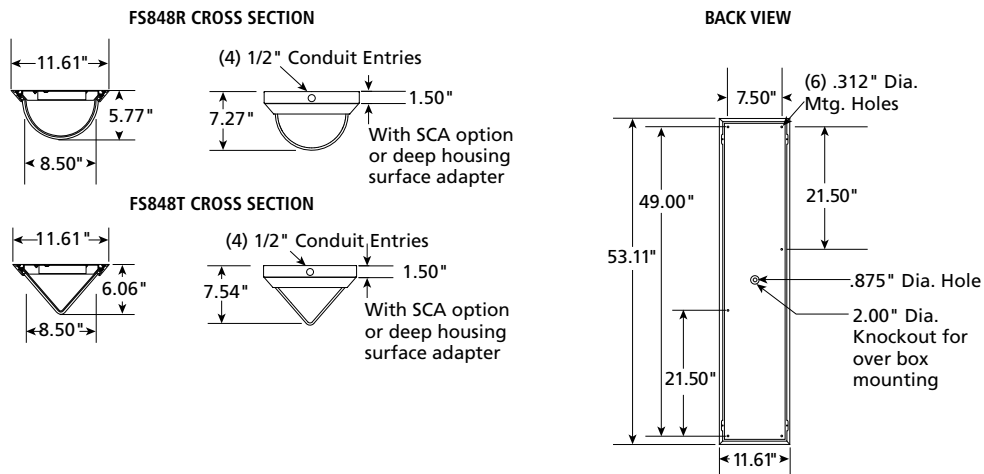

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**