

HIGH ABUSE


HASECI SERIES – LF CORNER MOUNT – INSET DOOR

PROJECT INFORMATION

Job Name _____
 Fixture Type _____
 Catalog Number _____
 Approved by _____

PRODUCT FEATURES:

- » Surface corner mount – 8" x 48"
- » One-piece inset doorframe, secured to housing with continuous piano hinge and Torx® fasteners
- » 20-gauge hole-free, one-piece cold rolled steel housing
- » Closed cell extruded silicone gasket seals doorframe to housing
- » Peace of Mind Guarantee® against breakage
- » UL certified IP65 per IEC 60598



SPECIFICATIONS:

HOUSING: 20-gauge CRS. Hole-free three-piece seam welded construction. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: See Lens Options below to specify lens material. Lens sealed to doorframe with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out. Minimum .187" polycarbonate lens required (max. .375") for Peace of Mind Guarantee®.

DOORFRAME: 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe secured to housing with continuous hinge and 3 tamper-resistant stainless steel Torx® with center pin fasteners.

DOORFRAME GASKET: Closed cell extruded silicone gasket seals doorframe to housing.

ELECTRICAL: Fluorescent electronic ballasts (<10% THD). Lamps by others. See Electrical Options for additional options.

INSTALLATION: Four .312" holes for surface mounting.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598.




ORDERING INFORMATION (Ex: HASECI14-2-54-RS-1-120-5F-2H-9)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe Option	Housing	Lens Type	Options
HASECI14								
Lamp Quantity/Type		Ballast Type		Doorframe Options		Options		
1-28	One F28T5	IS	Instant Start Electronic <10% THD (T8)	2F	18-Ga CRS Painted (STD)	EL* Standard Lumen One-Lamp EL Pack		
2-28	Two F28T5	RS	Rapid Start Electronic <10% THD (T8,T5,T5HO)	5F	20-Ga Type 304 SS	PEL* High Lumen One-Lamp EL Pack		
3-28	Three F28T5	SB	Specified Ballast			SEL* Specified EL Pack		
1-32	One F32T8					DLN LED Night Light w/Light Level Control (100%-20%)		
2-32	Two F32T8					FS* Single Fuse & Holder		
3-32	Three F32T8					HJ Sealed Wireway		
1-54	One F54T5HO	Ballast Quantity				RF Radio Frequency Filter		
2-54	Two F54T5HO	1	One			TH 1/2" Trade Size Threaded Hub (Lamp supplied by other)		
3-54	Three F54T5HO	2	Two			TN PL Night Light – 5/7/9 Watt (Lamp supplied by other) (120/277V only)		
				Voltage				
				120	120 Volts			
				277	277 Volts			
				347	347 Volts			
				Specified Lens				
				SL	Specified Lens			

* n/a with three (3) F54T5HO lamps

DIMENSIONAL DATA

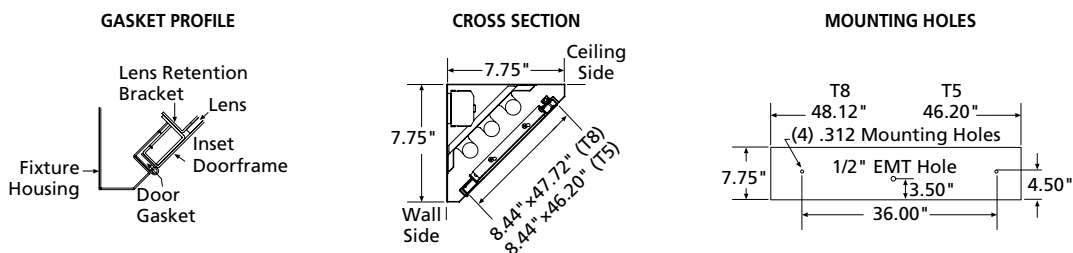

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.