

HIGH ABUSE

HASEFI SERIES – LF FLANGE MOUNT – INSET DOOR

PRODUCT FEATURES:

- » Recessed ceiling mount – flange; 1'x4', 2'x2', 2'x4'
- » One-piece inset doorframe, secured to housing with continuous piano hinge and Torx® fasteners
- » 20-gauge hole-free, one-piece cold rolled steel housing
- » Closed cell extruded silicone gasket seals doorframe to housing
- » Peace of Mind Guarantee® against breakage
- » UL certified IP65 per IEC 60598



1' x 4'



2' x 2'



2' x 4'

SPECIFICATIONS:

HOUSING: 20-gauge CRS. Hole-free seam welded construction. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

HOUSING FLANGE: 18-gauge CRS. Mitered and welded corners and spot-welded to housing.

LENS: See Lens Options below to specify lens material. Lens sealed to doorframe with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out. Minimum .187" polycarbonate lens required (max. .375") for Peace of Mind Guarantee®.

DOORFRAME: 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Lens frame secured to housing with continuous hinge and 3 tamper-resistant stainless steel Torx® with center pin fasteners.

DOORFRAME GASKET: Closed cell extruded silicone gasket seals lens frame to housing.

ELECTRICAL: Fluorescent electronic ballasts (<10% THD). Lamps by others. See Electrical Options for additional options.

INSTALLATION: Adjustable swing-out mounting brackets standard.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. CCEA approved.



ORDERING INFORMATION (Ex: HASEFI24T5-2-54-RS-1-120-2F-2H-9)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe Option	Housing	Lens Type	Options
Model		Lamp Quantity/Type (cont'd)			Ballast Type			Options
HASEFI14T5 1'x4'		2x2 – T8			IS Instant Start Electronic <10% THD (T8)			EL* Standard Lumen One-Lamp EL Pack
HASEFI22T5 2'x2'		2-17 Two F17T8			RS Rapid Start Electronic <10% THD (T8, T5, T5HO)			PEL* High Lumen One-Lamp EL Pack
HASEFI24T5 2'x4'		3-17 Three F17T8			SB Specified Ballast			SEL* Specified EL Pack
HASEFI14T8 1'x4'		4-17 Four F17T8			Ballast Quantity			DLN LED Night Light w/Light Level Control (100% - 20%)
HASEFI22T8 2'x2'		6-17 Six F17T8			1 One			FS* Single Fuse & Holder
HASEFI24T8 2'x4'		2-31U Two F318 – 1.625" U			2 Two			HJ Sealed Wireway
		3-31U Three F318 – 1.625" U			Voltage			IF** Install Frame
					120 120 Volts			PF** Plaster Frame
Lamp Quantity/Type		2x4 – T5			277 277 Volts			RF Radio Frequency Filter
1x4 – T5		2-28 Two F28T5			347 347 Volts			RM Continuous Row Mount
1-28 One F28T5		3-28 Three F28T5			Doorframe Options			TH 1/2" Trade Size Threaded Hub
2-28 Two F28T5		4-28 Four F28T5			2F 18-Ga CRS Painted (STD)			TN PL Night Light – 5/7/9 Watt (Lamp supplied by other) (120/277V only)
3-28 Three F28T5		6-28 Six F28T5			5F 20-Ga Type 304 SS Brushed			
1-54 One F54T5HO		2-54 Two F54T5HO			Housing/Flange Options			<i>*n/a with three (3) F54T5HO (1x4), six (6) F54T5HO (2x4)</i>
2-54 Two F54T5HO		3-54 Three F54T5HO			2H 20-Ga CRS/18-Ga CRS (STD)			<i>**Add .25" to Ceiling Cutout dimensions</i>
3-54 Three F54T5HO		4-54 Four F54T5HO			5H5 20-Ga Type 304 SS/18-Ga Type 304 SS			
		6-54 Six F54T5HO			2H5 20-Ga CRS/18-Ga Type 304 SS			
1x4 – T8		2x4 – T8			Lens Type			
1-32 One F32T8		2-32 Two F32T8			Polycarbonate			
2-32 Two F32T8		3-32 Three F32T8			6 .187" #12 Prismatic			
3-32 Three F32T8		4-32 Four F32T8			9 .250" Clear Polycarbonate			
		6-32 Six F32T8			1/9 .125" #12 Prismatic Acrylic inside lens .250" Clear Polycarbonate outside lens			
2x2 – T5					Specified Lens			
2-14 Two F14T5					SL Specified Lens			
3-14 Three F14T5								
4-14 Four F14T5								
6-14 Six F14T5								
2-24 Two F24T5HO								
3-24 Three F24T5HO								



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.


A brand of **legrand**

HASEFI_14_22_24-100918

HIGH ABUSE

HASEFI SERIES – LF FLANGE MOUNT – INSET DOOR

DIMENSIONAL DATA

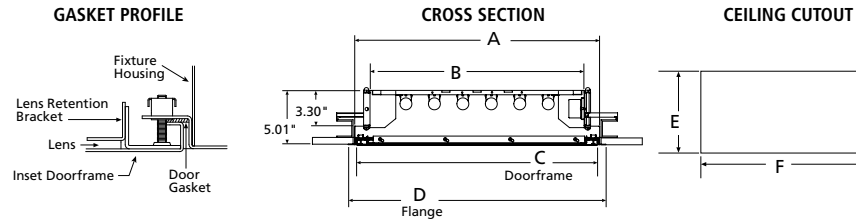

DIMENSIONAL DATA (IN INCHES)

	A	B	C	D	E	F
1x4 T5	12.20x46.60	9.35x46.60	11.80x46.20	13.35x47.75	12.50	46.88
2x2 T5	22.60x22.60	19.75x22.60	22.20x22.60	23.75x23.75	22.88	22.88
2x4 T5	22.60x46.60	19.75x46.60	22.20x46.20	23.75x47.75	22.88	46.88
1x4 T8	12.20x48.13	9.35x48.13	11.80x47.70	13.35x49.27	12.50	48.38
2x2 T8	22.60x24.13	19.75x24.13	22.20x25.70	23.75x25.27	22.88	24.38
2x4 T8	22.60x48.13	19.75x48.13	22.20x47.70	23.75x49.27	22.88	48.38

NOTE: Add .25" to each cut-out dimension when Install Frame (IF) or Plaster Frame (PF) Accessory is specified.

