

MILLENIUM METREX™

METMSU SERIES

PRODUCT FEATURES:

- » Surface mount – wall or ceiling;
Single Face
- » Indirect LED with life up to 50,000 hours
- » Custom legend plate



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: High impact, injection molded polycarbonate. Housing provided with canopy mounting and wireway drill points top and side – see Cross Section/Details. Closed cell die-cut Neoprene gasket seals housing to canopy.

SHIELD: UV-stabilized, high impact, injection molded clear polycarbonate. Nominal thickness .120". Corrosion resistant Phillips head fasteners secure shield to housing. Continuous closed cell silicone gasket seals shield to housing.

CANOPY: High impact, injection molded polycarbonate canopy cover with heavy gauge galvanized steel mounting plate with integral 1/4-20 threaded studs. Canopy mounting plate provided with four-point mounting holes, one wireway hole and temporary junction box mounting holes. Closed cell die-cut Neoprene gasket seals canopy to mounting surface.

LEGEND: Legend illuminated by internal high output LEDs. Lettering height and stroke determined by legend option. Polycarbonate red or green filter panels. Stencil is 18-gauge laser cut steel with TGIC polyester powder coat finish to match housing.

ELECTRICAL: 624 nm Red or 527 nm Green LED light source. Electrical components mounted to removable high impact, injection molded polycarbonate chassis. Drill points provided for optional conduit entry.

OPTIONS: Tamper Resistant Torx® with center pin Fasteners.

INSTALLATION: Standard four-point mounting required for Peace of Mind Guarantee®.

WARRANTY: Limited five (5) year warranty. Peace of Mind Guarantee against breakage.



LISTINGS: UL and CUL listed for Wet Location. Meets or exceeds UL48. NSF2 Splash/Non-Food Zone.



ORDERING INFORMATION (Ex: METMSU-MW-R-DNE-DT)

Model	Finish	Legend Color	Legend Options	Voltage	Options
METMSU					
	Finish		Legend Options	Voltage	Options
	MB Matte Black		IU IN USE	DT 120/277 Volts	TR* Tamper Resistant Torx® T-20 with center pin Fasteners
	MW Matte White		XIU X-RAY IN USE	DTC 120/347 Volts	
	Legend Color		OCC OCCUPIED		*n/a with NSF2 listing
	R Red		MIU MRI IN USE		
	G Green		BIU BEAM IN USE		
			DNE DO NOT ENTER		
			CSL Customer Specified Legend (Consult Factory)		

DIMENSIONAL DATA

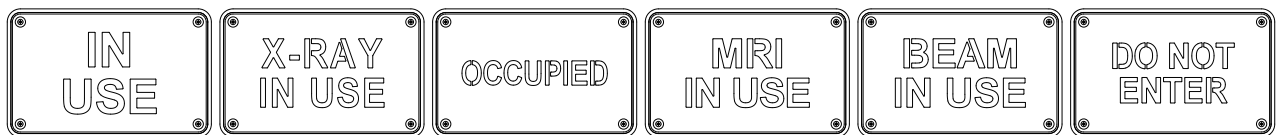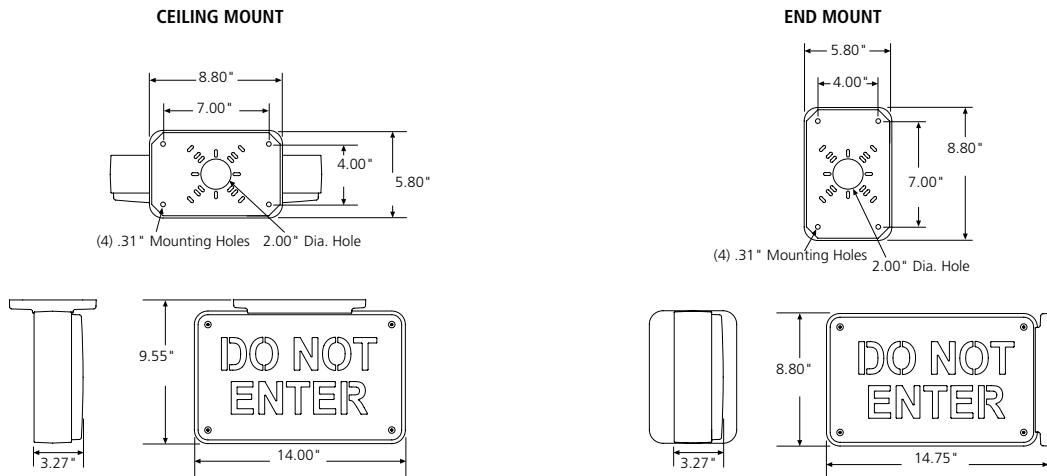

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2025 Kenall Mfg. Co.

A brand of **legrand**