

MEDMASTER ENVELA®

Patient Room Luminaires

ME SERIES

PERFORMANCE

Model	Lamp Type	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
		@ 25°C	Efficacy (lm/W)			
ME11	26L30K	1,687	58	29	94	80,000
	26L35K	1,740	60			
	26L40K	1,799	62			
	26L50K	1,871	65			
ME14	45L30K	4,850	97	50	100	80,000
	45L35K	5,000	100			
	45L40K	5,171	103			
	45L50K	5,525	110			
ME22	45L30K	4,289	86	50	100	80,000
	45L35K	4,421	88			
	45L40K	4,572	91			
	45L50K	4,885	98			
ME24	45L30K	5,576	112	50	94	80,000
	45L35K	5,749	115			
	45L40K	5,945	119			
	45L50K	6,183	124			
	67L30K	8,365	113	74	66	80,000
	67L35K	8,624	117			
	67L40K	8,918	121			
	67L50K	9,275	125			
	90L30K	11,152	114	98	94	80,000
	90L35K	11,497	117			
	90L40K	11,889	121			
	90L50K	12,365	126			

Displayed information is for selected luminaires only. Additional wattages and color temperatures are also available. Visit www.kenall.com for additional information.




MEDMASTER ENVELA® Patient Room Luminaires

For additional photometry, go to www.kenall.com

ME SERIES


Model: ME14-G-45L40K-DCC-DV-FA



Maximum Candela = 780 Located At Horizontal Angle = 0, Vertical Angle = 0

— 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
— 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)


Model: ME14-G-45L40K-DCC-DV-FA



Maximum Candela = 2060 Located At Horizontal Angle = 15, Vertical Angle = 2.5

— 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
— 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)


Model: ME22-G-45L40K-DCC-DV-FA



Maximum Candela = 1803 Located At Horizontal Angle = 15, Vertical Angle = 2.5

— 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
— 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)


Model: ME24-G-45L40K-DCC-DV-FA



Maximum Candela = 4427 Located At Horizontal Angle = 15, Vertical Angle = 2.5

— 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
— 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

DIMENSIONAL DATA

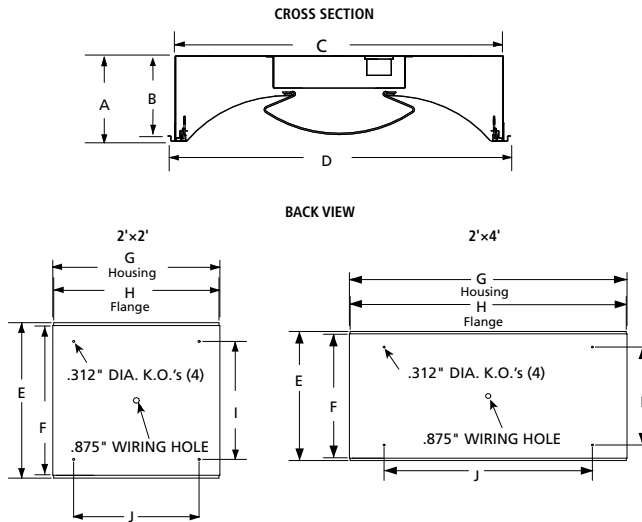

DIMENSIONAL DATA (IN INCHES)

	A	B*	C	D	E	F	G	H	I	J
1x1	6.30	5.93*	10.70	11.70	10.70	11.70	11.98	11.72	8.00	8.00
1x4	6.30	5.93*	10.70	11.70	10.70	11.70	47.98	47.72	8.00	36.00
2x2	6.30	5.93*	22.70	23.72	23.72	22.70	23.98	23.72	18.00	18.00
Recommended Ceiling Cut-Out 24.50x24.50 (Flange fixtures)										
2x4	6.30	5.93*	22.70	23.72	23.72	22.70	47.98	47.72	18.00	36.00
Recommended Ceiling Cut-Out 24.50x48.50 (Flange fixtures)										

*ST Mounting Option Only



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.