


MILLENIUM STRETCH™

MLHA8 SERIES - TUNABLE WHITE LED

PRODUCT FEATURES:

- » High-output, high CRI LED lamp sources with 2700K-6500K white tuning capability
- » Extruded and die-cast aluminum construction
- » Peace of Mind Guarantee™ against breakage



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: Marine grade aluminum. Extruded body with die-cast end caps. Housing, with end caps, post assembly TGIC polyester powder coat finished – 5-step pre-treatment. See Ordering Information for available finishes.

END CAPS: Marine grade die-cast aluminum. Three styles available: Flat, Rounded and Reveal. Conduit and "Wiremold™ ready" knockouts visible only from interior of end cap (Flat and Rounded styles only).

OPTIC: UV-stabilized, high-impact extruded pearlescent polycarbonate. Smooth exterior, linear prismatic interior. Nominal thickness .156". Lens securely positioned in body channels and end caps. Lens locked in place with four (4) tamper-resistant stainless steel Torx® with center pin fasteners and sealed with closed cell gaskets. Full reflector/ wire cover with 92% reflectivity.

LED MODULE: Serviceable tunable-white, mid-power LED array provides 2700K through 6500K CCT range with a two-point path. Minimum 82 CRI standard (R9 >20) with optional minimum 90 CRI (R9 >50).

DRIVER: 120-277VAC, 50/60Hz electrical input (PF ≥ 0.9, THD < 20%). Minimum 85% electrical efficiency. Serviceable, constant-current multi-channel programmable driver with dual analog (0-10V) control inputs for intensity and CCT. Linear intensity and CCT adjustment profiles with 1-100% range and dim-to-dark capabilities on intensity. Optional DALI (Type 8) driver with 1-100% range and dim-to-dark intensity dimming with linear intensity and CCT adjustment profiles.

INSTALLATION: Standard six-point mounting required for Peace of Mind Guarantee®. Suitable for installation into -30°C to 40°C ambient environments, unless otherwise noted.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: Limited ten (10) year warranty for LED Lamps.

LISTINGS: Luminaire is certified to UL Standards by Intertek Testing Laboratory for Wet Location – covered ceiling mount. ETL certified IP64 in compliance with IEC 60598 – ceiling mount. Corner, horizontal wall and pendant mount installation – damp location only. ADA compliant.



ORDERING INFORMATION (Ex: MLHA8-48-F-MW-PP-90T-27/65K8-ATW-DV-FS)

| Model | Length | End Cap | Finish | Lens | Lamp Power | Lamp Color | Driver Type | Voltage | Options | Accessories |
|--------------|---|---------|--------|--|------------|------------|-------------|---------|---|-------------|
| MLHA8 | 48 | | | PP | | | | | | |
| | Length 48 4' | | | Lens Type PP Pearlescent Polycarbonate | | | | | Options LEL Integral 8.4W Emergency Battery Backup (45T lamp max, 0°C minimum operating temperature) CDF Captive Diffuser Fasteners DL Damp Location (Interior use NO gasketing) FS Single Fuse & Holder PH Phillips Head Fasteners PM‡ Pendant Mount (Max. 3/8NPT stems by others; damp only) | |
| | End Caps F Flat R Rounded RV Reveal | | | Lamp Power 45T 45W Tunable White 67T 67W Tunable White 90T 90W Tunable White | | | | | Accessories CMB‡ Corner Mount Bracket (Must be ordered with DL Option) 9500 Torx® Screwdriver D-0552 Torx Driver Bit (Required for CMB Option) | |
| | Finish LG Light Gray MB Matte Black MW Matte White CC Custom Color (Consult Factory) | | | Lamp Color 27/65K8 2700-6500K CCT Range (82 CRI min) 27/65K9 2700-6500K CCT Range (92 CRI min) | | | | | | |
| | | | | Driver Type ATW Analog (0-10V) Dimming Tunable White Driver DTW DALI Tunable White Driver DMX DMX Tunable White Driver (Consult Factory) | | | | | | |
| | | | | Input Voltage DV 120-277 Volts, 50/60Hz | | | | | | |

‡ PM and CMB not available in conjunction



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of Legrand

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

MLHA8-TW-113020

MILLENIUM STRETCH™

MLHA8 SERIES - TUNABLE WHITE LED



| Lamp Type | Performance at 4000K Tuning | | | |
|-------------|-----------------------------|-----------------|-----------------|--------------------------|
| | Lumen Output (lm) | Efficacy (lm/W) | Input Power (W) | Estd. L70 LED Life (Hrs) |
| 45T-27/65K8 | 5,037 | 109 | 46 | 80,000 |
| 45T-27/65K9 | 4,060 | 88 | 46 | 80,000 |
| 67T-27/65K8 | 7,536 | 111 | 68 | 80,000 |
| 67T-27/65K9 | 6,242 | 92 | 68 | 80,000 |
| 90T-27/65K8 | 9,788 | 106 | 92 | 60,000 |
| 90T-27/65K9 | 7,889 | 86 | 92 | 60,000 |

Information subject to change without notice. Visit www.kenall.com for ies files additional information.

PERFORMANCE SCALING, BY LAMP COLOR


| CCT (K) | 27/65K8 | | | | | 27/65K9 | | | | |
|---------|--------------------|----|----|----|----|--------------------|----|----|----|-----|
| | LUMEN SCALE FACTOR | Ra | R9 | Rf | Rg | LUMEN SCALE FACTOR | Ra | R9 | Rf | Rg |
| 2700 | 0.97 | 83 | 10 | 83 | 97 | 0.98 | 92 | 57 | 89 | 98 |
| 3000 | 0.98 | 84 | 15 | 83 | 98 | 0.99 | 94 | 70 | 91 | 99 |
| 3500 | 0.99 | 86 | 23 | 84 | 98 | 0.99 | 95 | 77 | 92 | 99 |
| 4000 | 1.00 | 86 | 26 | 84 | 98 | 1.00 | 96 | 83 | 92 | 99 |
| 4600 | 1.01 | 86 | 28 | 84 | 98 | 1.01 | 96 | 90 | 92 | 100 |
| 5000 | 1.01 | 86 | 25 | 83 | 98 | 1.03 | 96 | 96 | 91 | 101 |
| 5700 | 1.02 | 85 | 23 | 82 | 98 | 1.02 | 96 | 96 | 91 | 100 |
| 6500 | 1.04 | 84 | 16 | 82 | 96 | 1.02 | 96 | 96 | 90 | 100 |

CCT AND INTENSITY ADJUSTMENT PROFILE - ATW DRIVER TYPE

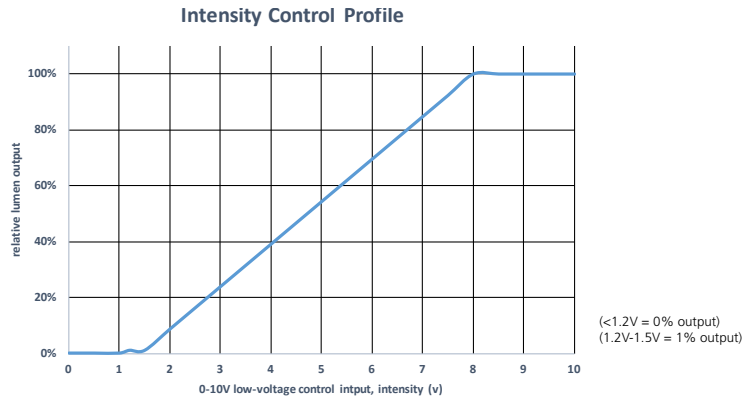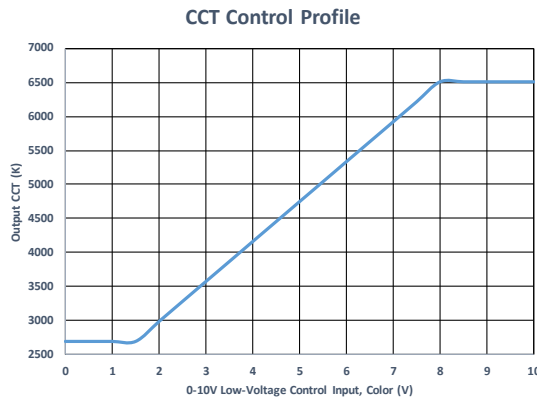

NOTE: The provided information is the typical expected performance of a single luminaire. Additional luminaires on the same 0-10V line may result in different control profiles. Fine tuning of system performance should be completed after installation is complete. To avoid CCT shift between luminaires, care should be taken to minimize voltage drop on the CCT Control line. It is recommended to limit the load on the CCT control circuit to twenty (20) 45T or ten (10) 67T/90T luminaires or less.

Model: MLHA8-48-F-MW-PP-90T-27/65K8-ATW-DV



Maximum Candela = 3027 Located At Horizontal Angle = 15, Vertical Angle = 5

- 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.


A brand of Legrand

MILLENIUM STRETCH™


MLHA8 SERIES - TUNABLE WHITE LED

DIMENSIONAL DATA


CROSS SECTION/DETAILS



MOUNTING HOLES

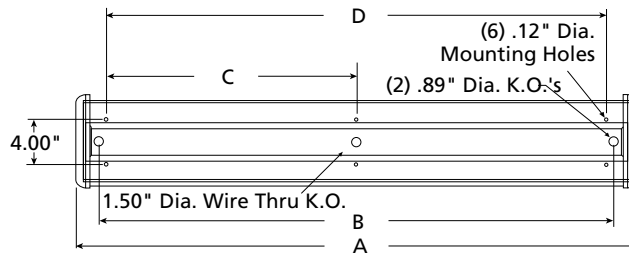

CORNER MOUNT BRACKET



Nominal Four Foot Fixture Legend

| End Cap | A | B | C | D |
|---------|-------|-------|-------|-------|
| R | 50.52 | 46.31 | 22.50 | 45.00 |
| F | 49.31 | 46.31 | 22.50 | 45.00 |
| RV | 52.63 | 46.31 | 22.50 | 45.00 |



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **Legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.