

MILLENIUM STRETCH™

MLHA8 SERIES – GEOMETRIC/CONTINUOUS RUN

PROJECT INFORMATION


Job Name _____
 Fixture Type _____
 Catalog Number _____
 Approved by _____

PRODUCT FEATURES:

- » Surface mount – wall or ceiling; nominal 8" x 48"
- » Extruded aluminum housing with die-cast end caps
- » Low-profile, ADA compliant
- » Peace of Mind Guarantee® against breakage




Rounded End Cap



Flat End Cap




Reveal End Cap



Continuous Row Joiner Band



Node "L" 2-Way



Node "N" Inline



Node "T" 3-Way



Node "X" 4-Way

SPECIFICATIONS

HOUSING: Marine grade aluminum. Extruded body with die-cast end caps. Housing, with end caps, post assembly TGIC polyester powder coat finished – 5-step pre-treatment. Each pattern run of luminaires consists of one or more "L", "N", "T", or "X" node. See ordering information to specify quantities. NOTE: Contact factory for pattern layout details.

REFLECTOR: Full reflector/wire cover – 97% reflectivity.

LENS: UV-stabilized, high impact extruded clear or pearlescent polycarbonate. Smooth exterior, linear prismatic interior. Nominal thickness .156". Lens securely positioned in body channels and end caps. Lens locked in place with tamper-resistant stainless steel Torx® with center pin fasteners and sealed with closed cell gaskets.

END CAPS: Marine grade die-cast aluminum. Three styles available: Flat, Rounded and Reveal. Conduit and "Wiremold™" ready" knockouts visible only from interior of end cap (Flat and Rounded styles only).

NODES: Marine grade cast aluminum cover mounted to 18-gauge mounting plate. Cover includes knockouts for Wiremold™ entry (not available in "X" 4-way node).

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Four stainless steel, tamper-resistant Torx® fasteners secure lens in housing body's lens channel. Electrical Quick Connector supplied (Specify Circuit Qty, see below).

ELECTRICAL: LED: Available 3500K, 4000K and 5000K color temperatures, 82 CRI. 120-277VAC and 347VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 1-100% range and dim-to-dark capabilities; maximum driver source of 330 µA. LE: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

SENSOR & CONTROLS: Optional sensor available with compatible third party controls. To see the full list of compatible controls, [click here](#).

INSTALLATION: Standard six-point mounting per fixture required for Peace of Mind Guarantee®.

WARRANTY: limited ten (10) year warranty for LED Lamps. [Peace of Mind Guarantee against breakage](#).

LISTINGS: Luminaire is certified to UL standards by Intertek Testing Laboratories for non-IC and Damp Location installations. ADA compliant. Suitable for use as a raceway. Suitable for use in continuous row.



ORDERING INFORMATION (Ex: MLHA8GMS-4/48-0/L-0/T-4/X-0/N-R-MB-CP-1-54-RS-1-120)

Model	Fixture Qty	Node L	Node T	Node X	Node N	End Cap*	Finish	Lens	Lamp Qty	Lamp Type	Ballast/Driver	Circuit Qty	Voltage	Options
MLHA8GMS	/48	/L	/T	/X	/N									

Fixture Quantity (replace "x" with qty)
 (x)/48 Nominal 48" housing

Node L (replace x with qty)
 (x)/L Node "L" 2-Way Intersecting

Node T (replace x with qty)
 (x)/T Node "T" 3-Way Intersecting

Node X (replace x with qty)
 (x)/X Node "X" 4-Way Intersecting

Node N (replace x with qty)
 (x)/N Node "N" Inline

End Caps* (if required)
R Rounded
F Flat
RV Reveal

Finish
MW Matte White
MB Matte Black
LG Light Gray
CC Custom Color (Consult Factory)

Lens
CP† Clear Polycarbonate
PP Pearlescent Polycarbonate

Lamp Quantity (Cross Section)†
1 One
2† Two

Lamp Type
45L35K 45 Watt 3500K LED
45L40K 45 Watt 4000K LED
45L50K 45 Watt 5000K LED
67L35K 67 Watt 3500K LED
67L40K 67 Watt 4000K LED
67L50K 67 Watt 5000K LED
90L35K 90 Watt 3500K LED
90L40K 90 Watt 4000K LED
90L50K 90 Watt 5000K LED
28 F28T5 (rapid start only)
32 F32T8
54 F54T5HO (rapid start only)
54A F54T5HO amalgam (rapid start only)

Ballast/Driver Type
DCC Dimming Constant Current (LED)
IS Instant Start Electronic <10% THD (T8)
RS Rapid Start Electronic <10% THD (T8, T5, T5HO)
SB Specified Ballast

Circuit Quantity†
1 One
2† Two

Voltage
120 120 Volts
277 277 Volts
347A 347 Volts
DV 120-277 Volts

Options
EL†** 500 Minimum Lumen Battery Pack – Specify Qty (90 Minutes; 32°F Starting Temperature)
PEL†** 1100 Minimum Lumen Battery Pack – Specify Qty (90 Minutes; 32°F Starting Temperature)
FS Single Fuse & Holder
PH Phillips Head Fasteners
PM Pendant Mount (Max. 3/8NPT stems by others; damp only)
UC† Uplight Component (Pendant Mount only; stems by others)
XC Auxiliary Circuit

** One lamp maximum in emergency mode.
 ▲ n/a with EL or PEL options.
 ▲ n/a with T5HO if EL/PEL option ordered with PM or UC option
 † n/a with LED Lamp Type



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.

A brand of **legrand**

MLHA8GMS-012522

MILLENIUM STRETCH™


MLHA8 SERIES – GEOMETRIC/CONTINUOUS RUN

PERFORMANCE

Lamp Type	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
	@ 25°C	Efficacy (lm/W)			
45L35K	4,758	97	49	100	150,000
45L40K	5,072	104	49	100	150,000
45L50K	5,072	104	49	100	150,000
67L35K	7,284	100	73	75	150,000
67L40K	7,765	106	73	75	150,000
67L50K	7,765	106	73	75	150,000
90L35K	9,252	94	98	100	150,000
90L40K	9,864	101	98	100	150,000
90L50K	9,864	101	98	100	150,000

Information above is valid for the recommended Type PP lens type and is subject to change without notice. Visit www.kenall.com for IES files and additional information.


Model: MLHA8-48-F-MW-PP-45L40K-DCC-DV

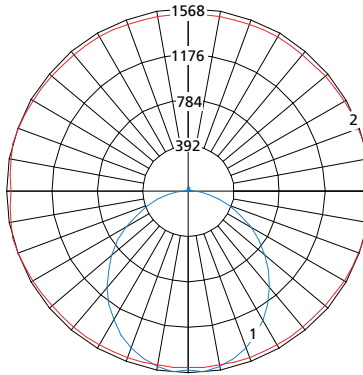


Maximum Candela = 1568 Located At Horizontal Angle = 15, Vertical Angle = 5

- 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

DIMENSIONAL DATA




Please provide reflected ceiling plans to factory for dimensional data and factory supplied fixture layout with mounting information. Dimensions A and B are outside dimensions. Dimension C is mounting holes.




"L" NODE

SERIES	Dimensions			Part #
	A	B	C	
MLRS8S	8.33"	5.00"	2.50"	ML8L




"N" NODE

SERIES	Dimensions			Part #
	A	B	C	
MLRS8S	7.70"	8.95"	5.00"	ML8N



"T" NODE

SERIES	Dimensions			Part #
	A	B	C	
MLRS8S	8.33"	8.95"	5.00"	ML8T



"X" NODE

SERIES	Dimensions			Part #
	A	B	C	
MLRS8S	8.95"	8.95"	5.00"	ML8X

Dimensions A and B are outside dimensions. Dimension C is mounting holes.



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.