

MILLENNIUM™ OVAL

MO13 SERIES – HORIZONTAL DEEP PROFILE

PRODUCT FEATURES:

- » Surface mount – wall; 13"W×9"H×7"D
- » Aluminum baseplate with UV-stabilized high impact lens
- » Peace of Mind Guarantee® against breakage
- » ADA Compliant
- » Tested to IESNA LM-79-08 standards



MO13HD



MO13HBD

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: Marine grade die-cast aluminum. Rib reinforced construction. Integral heat sinks. Housing flange interlocks and wraps around lens base producing maximum moisture deflection and resistance to prying. Housing provided with four-point mounting holes, one wireway hole and temporary junction box mounting capabilities. Standard matte black, dark bronze or matte white exterior TGIC polyester powder coat – 5-step pre-treatment. See Ordering Information for optional finishes.

REFLECTOR: Full reflector/wire cover – 92% reflectivity.

LENS: UV-stabilized, high impact resistant, virgin injection molded polycarbonate. High efficiency blondel fluted lens maximizes uniformity. Close tolerance mating of injection molded lens and lens base facilitates set up and installation. Lens and lens base secured with two concealed captive Torx® with center pin fasteners.

LENS BASE/GRILLE: High impact resistant, injection molded matte black, dark bronze or matte white polycarbonate. Optional Light Gray, Silver, Forest Green or Custom Color (see Ordering Information below) are chemically bonded, impact resistant finishes.

GASKETING: Die-cut, closed cell neoprene self adhesive gasket seals housing to mounting surface. Closed cell, silicone "O" ring gaskets positioned and friction secured in gasket channels of lens base and housing.

HARDWARE: Two stainless steel Torx® with center pin fasteners.

ELECTRICAL: Available in 3500K, 4000K, and 5000K color temperatures, 80 CRI. 120-277VAC, 50/60Hz electrical input with high power factor electronic, constant-current driver (>.90 PF). Standard 0-10V dimming with 1-100% range; maximum driver source of 200 µA.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: Luminaire is certified to UL Standards by either Underwriters Laboratory or Intertek Laboratory for Wet Location (includes Emergency Battery Pack "LEL" option). UL certified IP64 per IEC 60598.



ORDERING INFORMATION (Ex: MO13HBD-PP-DB-20L40K-DV)

Model	Lens Type	Finish	Lamp Type	Voltage	Options	Accessories
Model			Lamp Type			Options
MO13HD	Eyelid		MO13HD			
MO13HBD	Bar		8L35K	8 Watt 3500K LED		LEL LEL Emergency Battery Backup (n/a with 347V)
			8L40K	8 Watt 4000K LED		BPC Photo Control – Shielded Button Type (120V or 277V only)
			8L50K	8 Watt 5000K LED		FS Single Fuse & Holder
Lens Type						NAT Natatorium Environment Option
PP	Pearlescent Polycarbonate		16L35K	16 Watt 3500K LED		
			16L40K	16 Watt 4000K LED		
			16L50K	16 Watt 5000K LED		
Finish			MO13HBD			
MB	Matte Black		10L35K	10 Watt 3500K LED		
MW	Matte White		10L40K	10 Watt 4000K LED		
DB	Dark Bronze		10L50K	10 Watt 5000K LED		
LG	Light Gray		20L35K	20 Watt 3500K LED		
SL	Silver		20L40K	20 Watt 4000K LED		
FG	Forest Green		20L50K	20 Watt 5000K LED		
CC	Custom Color (Consult factory)					
			Voltage			
			120	120 Volts		
			277	277 Volts		
			347†	347 Volts		
			DV†	120-277 Volts		
					† n/a BPC	



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of Legrand


MILLENIUM™ OVAL

MO13 SERIES – HORIZONTAL DEEP PROFILE

PERFORMANCE		Initial Delivered Lumens				
Model	Lamp Type	@ 25°C (lm)	Efficacy (lm/W)	Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (hrs)
MO13HD	8L35K	963	84	11	75	85,000
	8L40K	963	84	11	75	85,000
	8L50K	1,050	92	11	75	85,000
	16L35K	1,574	79	20	150	85,000
	16L40K	1,574	79	20	150	85,000
	16L50K	1,716	86	20	150	85,000
MO13HBD	10L35K	931	71	13	75	85,000
	10L40K	931	71	13	75	85,000
	10L50K	1015	77	13	75	85,000
	20L35K	1796	75	24	150	85,000
	20L40K	1796	75	24	150	85,000
	20L50K	1958	82	24	150	85,000


Info subject to change. Visit www.kenall.com for IES files and additional information.

Model: MO13HD-PP-MW-16L40K-DV



Max Candela = 588 Located At Horizontal Angle = 0, Vertical Angle = 65
 — 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 — 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)

DIMENSIONAL DATA

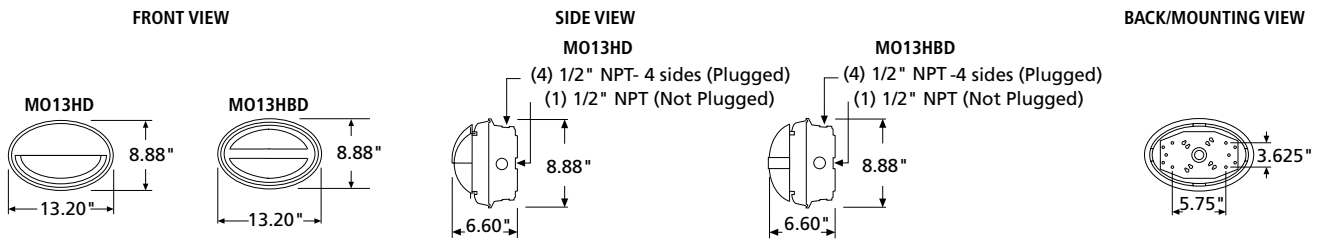

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**