


# MILLENIUM™ ROUND

## MR17 SERIES – SEMI-RECESSED

### PRODUCT FEATURES:

- » Semi-recessed – ceiling (n/a with MR17ESR) or wall mount; 18" Dia. x 4"D
- » Peace of Mind Guarantee® against breakage
- » Dust and water protected to IP64 standards
- » ADA compliant



### PROJECT INFORMATION

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

Approved by \_\_\_\_\_

### SPECIFICATIONS:

**HOUSING (SERIES PP, ND, CO):** Die-cast aluminum housing with integral heat sinks. Housing interlocks to lens base producing maximum moisture deflection and resistance to prying. Standard dark bronze exterior TGIC polyester powder coat – 5-step pre-treatment.

**HOUSING (SERIES NL, CC):** 18-gauge CRS housing. Housing interlocks to lens base producing maximum moisture deflection and resistance to prying. Standard matte white exterior TGIC polyester powder coat – 5-step pre-treatment.

**REFLECTOR:** Full reflector/wire cover – 92% reflectivity.

**LENS:** UV-stabilized, high impact resistant, virgin injection molded polycarbonate. High efficiency blondel fluted lens maximizes uniformity. Close tolerance push/turn/lock-in-place mating of injection molded lens and lens base. Lens and lens base secured with one concealed captive Torx® with center pin fastener.

**LENS BASE:** Marine grade die-cast aluminum. Standard matte black, dark bronze, or matte white exterior TGIC polyester powder coat – 5-step pre-treatment. See Ordering Information for optional finishes.

**LENS GRILL (BSR/CSR/ESR):** High impact resistant, injection molded matte black, dark bronze, or matte white polycarbonate. Optional Light Gray, Silver, or Forest Green (see Ordering Information below) are chemically bonded, impact resistant finishes.

**GASKETING:** Closed cell, silicone "O" ring gaskets positioned in gasket channels of lens base and in Series PP, ND, CO housing.

**HARDWARE:** One stainless steel Torx® with center pin fastener.

**ELECTRICAL:** Available in 3500K, 4000K, and 5000K color temperatures, 80 CRI. 120-277VAC, 50/60Hz electrical input with high power factor electronic, constant-current driver (>.90 PF). Standard 0-10V dimming with 1-100% range; maximum driver source of 200 µA.

**PHOTOMETRICS:** Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to [www.kenall.com](http://www.kenall.com).

**INSTALLATION:** See [Technical Data Sheets](#) for semi-recessed installation details, mounting options and rough-in box part number.

**WARRANTY:** Limited five (5) year LED warranty. [Peace of Mind Guarantee against breakage.](#)

**LISTINGS:** UL and CUL listed for Wet Location (listing includes Emergency Battery Pack "LEL" option). UL certified IP64 per IEC 60598.



### ORDERING INFORMATION (Ex: MR17CSR-PP-PP-MW-25L40K-DV)

Model	Mounting	Lens Type	Finish	Lamp Type	Voltage	Options	Accessories
<b>Model</b>			<b>Finish</b>		<b>Voltage</b>		
MR17BSR	Bar		MB Matte Black		347 347 Volts		
MR17CSR	Cross		MW Matte White		DV 120-277 Volts		
MR17ESR	Eyelid		DB Dark Bronze			<b>Options</b>	
MR17FSR	Full Face		LG Light Gray			LEL† LED Emergency Battery Backup (n/a with 347V; 15L max. on MR17ESR)	
			SL Silver			20KV† 20KV/KA Surge Protection per IEEE/ANSI C62.41.2 Cat. A	
<b>Mounting Type</b>			FG Forest Green			FS Single Fuse & Holder	
PP	Pour-in-Place or Masonry		CC Custom Color (Consult factory)			NAT Natatorium Environment Option	
ND	Non IC (Deep Profile)			<b>Lamp Type</b>			
NL	Non IC (Low Profile)			15L35K	15 Watt 3500K LED		
CC*	Canopy (Covered Top) (n/a with MR17ESR)			15L40K	15 Watt 4000K LED		
CO*	Canopy (Open Top) (n/a with MR17ESR)			15L50K	15 Watt 5000K LED		
<b>Lens Type</b>				25L35K	25 Watt 3500K LED		
PP	Pearlescent Polycarbonate			25L40K	25 Watt 4000K LED		
				25L50K	25 Watt 5000K LED		
						<b>Accessories</b>	
						9500 Torx® Screwdriver	
						* Ceiling Mounting Only	
						† LEL and 20KV options not available in conjunction	



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2019 Kenall Mfg. Co.

A brand of Legrand


# MILLENIUM™ ROUND

## MR17 SERIES – SEMI-RECESSED

PERFORMANCE		Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (hrs)
Model	Lamp Type	@ 25°C (lm)	Efficacy (lm/W)			
MR17FSR	15L35K	2,125	108	20	75	130,000
	15L40K	2,125	108	20	75	130,000
	15L50K	2,316	118	20	75	130,000
	25L35K	3,116	106	30	63	130,000
	25L40K	3,116	106	30	63	130,000
	25L50K	3,396	116	30	63	130,000
MR17BSR	15L35K	1,870	95	20	75	130,000
	15L40K	1,870	95	20	75	130,000
	15L50K	2,038	104	20	75	130,000
	25L35K	2,742	93	30	63	130,000
	25L40K	2,742	93	30	63	130,000
	25L50K	2,988	102	30	63	130,000
MR17CSR	15L35K	1,706	87	20	75	130,000
	15L40K	1,706	87	20	75	130,000
	15L50K	1,860	95	20	75	130,000
	25L35K	2,501	85	30	63	130,000
	25L40K	2,501	85	30	63	130,000
	25L50K	2,726	93	30	63	130,000
MR17ESR	15L35K	1,760	90	20	75	130,000
	15L40K	1,760	90	20	75	130,000
	15L50K	1,923	98	20	75	130,000
	25L35K	2,586	88	30	63	130,000
	25L40K	2,586	88	30	63	130,000
	25L50K	2,819	96	30	63	130,000


Info subject to change. Visit [www.kenall.com](http://www.kenall.com) for IES files and additional information.

Model: MR17FSR-PP-MW-25L40K-DCC-DV



Max Candela = 983 Located At Horizontal Angle = 0, Vertical Angle = 0  
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)  
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: MR17ESR-PP-MW-25L40K-DCC-DV



Max Candela = 918 Located At Horizontal Angle = 0, Vertical Angle = 65  
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)  
 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)



[www.kenall.com](http://www.kenall.com) | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA


A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2019 Kenall Mfg. Co.

# MILLENIUM™ ROUND

## MR17 SERIES – SEMI-RECESSED

### DIMENSIONAL DATA

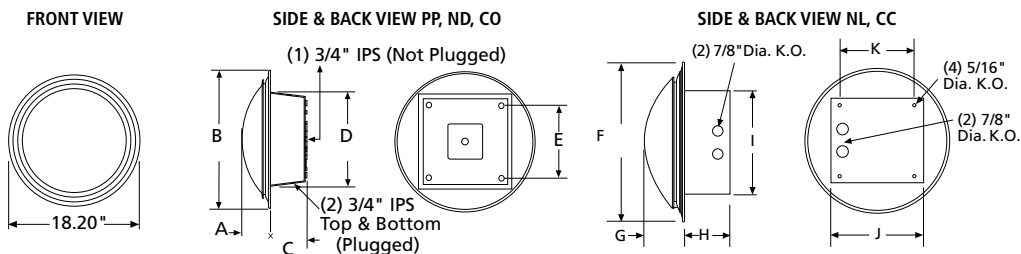

#### DIMENSIONAL DATA (IN INCHES)

	A	B	C	D	E	F	G	H	I	J	K
<b>FSR</b>	3.7	18.2	4.9	12.3	9.5	18.2	3.7	3.8	12.2	12.2	10.00
<b>BSR</b>	4.0	18.2	4.9	12.3	9.5	18.2	4.0	3.8	12.2	12.2	10.00
<b>CSR</b>	4.0	18.2	4.9	12.3	9.5	18.2	4.0	3.8	12.2	12.2	10.00
<b>ESR</b>	4.0	18.2	4.9	12.3	9.5	18.2	4.0	3.8	12.2	12.2	10.00

