

MIGHTY MAC™

SDSA SERIES with BIOS SkyBlue™

PRODUCT FEATURES:

- » Features BIOS SkyBlue Technology to benefit daytime alertness, cognition, mood and circadian rhythms
- » Surface ceiling mount
- » TIG-welded housing without post-weld grinding for additional strength
- » Continuous lens retention with thru-studs spaced 6" apart



SPECIFICATIONS

HOUSING: One-piece die-formed prime grade material as specified – see Ordering Information. Corners continuously seam welded and smooth with no post grinding (TIG).

DOOR: One-piece die-formed prime grade material as specified – see Ordering Information.

HINGE: Staked and welded external piano hinge (1/2" knuckle/1/8" diameter pin) standard. See Options for 2' Internal Hinge (IH) and Full Length Internal Hinge (IHF).

LENS: As specified – maximum overall thickness 0.625" – see Ordering Information. High efficiency diffused DR acrylic inner lens.

LENS RETENTION: Vertically adjustable continuous "Z" brackets of prime grade material, secured to housing via thru-studs (6" maximum spacing).

LED MODULE: Serviceable static, dynamic or tunable mid-power Gen 2 BIOS Biological LED modules. Biological Static, Biological Dynamic, and Biological Tunable LED source with blue spectrum peak at 490nm and higher melanopic ratio. CRI 80+ with R9 > 90. Dynamic features 500K downward CCT shift when dimmed for evening applications requiring lower melanopic ratio. Tunable features 2700K CCT for evening applications. Refer to table for specific melanopic values.

DRIVER/CONTROL: 120-277VAC, 50/60Hz electrical input (PF ≥ 0.9, THD < 20%). **Biological Static:** Serviceable, constant-current single channel driver with single analog (0-10V) control input for intensity. 1-100% range with dim to dark capabilities and a linear dimming curve. **Biological Dynamic:** Serviceable constant-current driver with the BIOS Dynamic Bio-Dimming™ module keeps light output constant while reducing melanopic lux. Single analog (0-10V) control input. 1-100% dimming range with dim-to-dark capabilities and a linear dimming curve. Dimming from 100-75% reduces CCT by 500K, dimming below 75% reduces light level. **Biological Tunable:** Serviceable, constant-current multi-channel programmable driver with dual analog (0-10V) control inputs for intensity and CCT. Optional DALI (Type 8) driver. Logarithmic intensity profile with 0.1-100% range, with dim-to-dark capabilities. Linear profile on CCT adjustment.

FASTENERS: Hardened security screws as specified – see Ordering Information. Fully recessed.

FINISH: TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For photometric information, go to www.kenall.com.

PATENT: US Patent No. 7,431,473.

WARRANTY: Limited five (5) year warranty on LED lamps.

LISTINGS: Luminaire is certified to UL 1598 and UL 8750 standards by Intertek Testing Services for Damp Locations. See Options for Wet Location rating.



ORDERING INFORMATION (Ex: SDSA-4-2/1-67B-35K8-ATW-DV-SYM/9-1-FS)

Model	Size	Hsg./Door Material	Lamp Power	Lamp Color	Driver Type	Voltage	Lens (Inner/Outer)	Fasteners	Options
SDSA	4	/				DV	SYM /		
Nominal Size			Lamp Power			Lens (Inner/Outer)			
4 12"×48"			45B 45 Watt BIOS 67B 67 Watt BIOS			SYM* .125" Diffused DR Acrylic G .125" Clear Polycarbonate 7 .187" Clear Polycarbonate 8 .187" Clear Tempered Glass 9 .250" Clear Polycarbonate A .250" Clear Tempered Glass B .375" Clear Polycarbonate C .375" Clear Tempered Glass J .500" Clear Polycarbonate P .500" Clear Tempered Glass			
Housing/Door Material			Lamp Color			Fasteners			
0 14-Ga CRS (Painted White) 1 16-Ga CRS (Painted White) 2* 18-Ga CRS (Painted White) 3 14-Ga SS (Painted White) 4 16-Ga SS (Painted White) 6 14-Ga SS (Brushed) 7 16-Ga SS (Brushed) 9 12-Ga CRS (Painted White)			35K8 3500K SkyBlue / 80CRI min / R9 90+ 40K8 4000K SkyBlue / 80CRI min / R9 90+			1 Torx® T-20 Head w/ Center Pin 2 Allen Head w/ Center Pin			
			Driver Type			Options			
			DIM1 BIOS Biological Static with 0-10V Dimming to 1% with Dim-to-Dark Capabilities BIODIM1 BIOS Biological Dynamic with 0-10V Intensity Dimming to 1% and Dim-to-Dark Capabilities ATW BIOS Biological Tunable White with 0-10V Control of Intensity and CCT independently on 2 separate channels DTW BIOS Biological Tunable White with DALI Control of Intensity and CCT independently on 2 separate channels			LEL Integral 10W Emergency Battery Backup (45B max, 0°C min ambient) LELST Integral 6W Self-Testing Emergency Battery Backup (45B max, 0°C min ambient) NLW 2700K White LED Night Light NLA Amber LED Night Light FS Single Fuse & Holder IH Internal Hinge IHF Full Length Internal Hinge KO 1/2" (1.27cm) EMT Knockout WL Wet Location Listed			
			Voltage DV 120-277VAC, 50/60Hz			* n/a as Door Material + n/a as Outer Lens			



MIGHTY MAC™

SDSA SERIES with BIOS SkyBlue™







DELIVERED MELANOPIC RATIO OF 35K8 BIOS

BIOS Type	Spectral Mode	Nominal CCT	Melanopic Ratio*	
			m-EER	m-DER
Biological Static	Daytime	3500K	≥0.80	≥0.72
Biological Dynamic	Daytime	3500K	≥0.80	≥0.72
	Evening	3000K	≤0.49	≤0.44
Biological Tunable	Daytime	3500K	≥0.80	≥0.72
	Evening	2700K	≤0.47	≤0.42

*Melanopic ratios are provided in two forms: (m-EER) which is calculated using the WELL v2 methodology and the corresponding CIE melanopic Daylight Equivalent Ratio, (m-DER).

DELIVERED MELANOPIC RATIO OF 40K8 BIOS

BIOS Type	Spectral Mode	Nominal CCT	Melanopic Ratio*	
			m-EER	m-DER
Biological Static	Daytime	4000K	≥0.90	≥0.81
Biological Dynamic	Daytime	4000K	≥0.90	≥0.81
	Evening	3500K	≤0.57	≤0.51
Biological Tunable	Daytime	4000K	≥0.90	≥0.81
	Evening	2700K	≤0.47	≤0.42

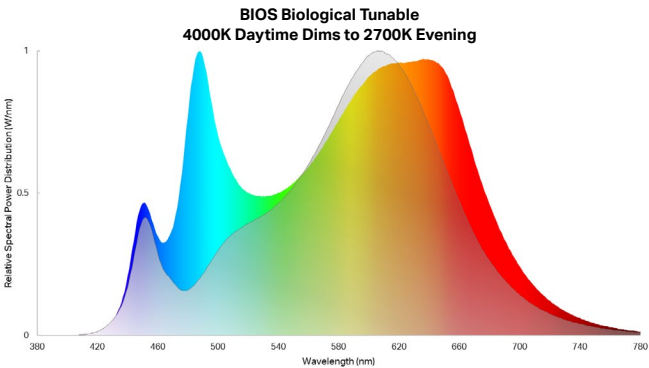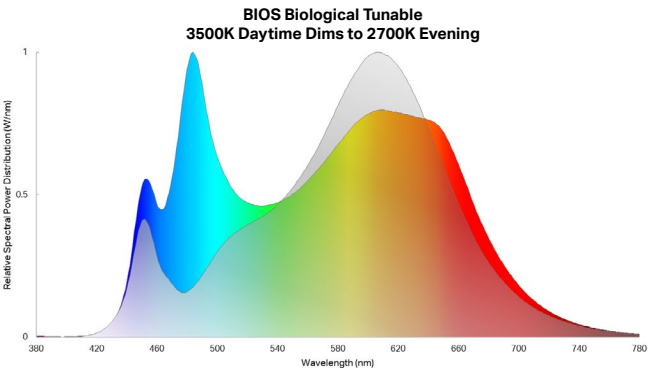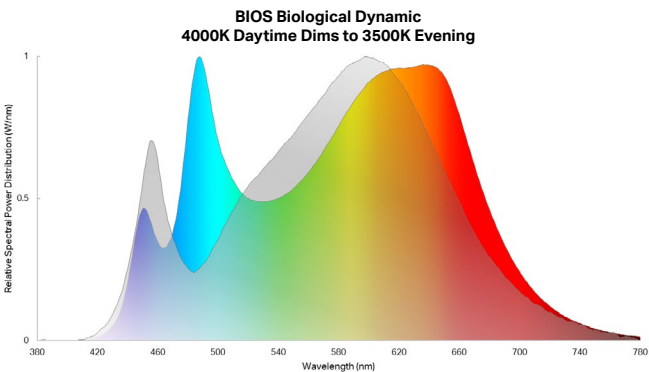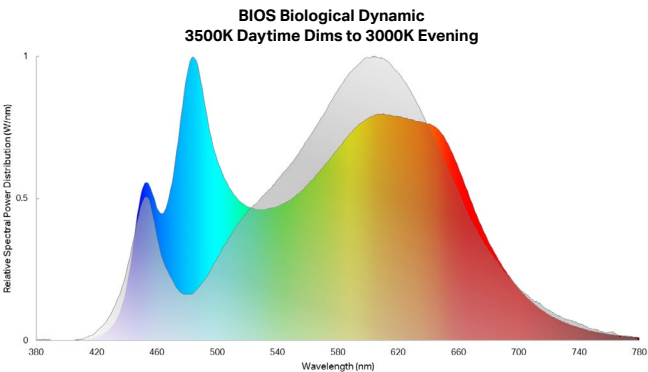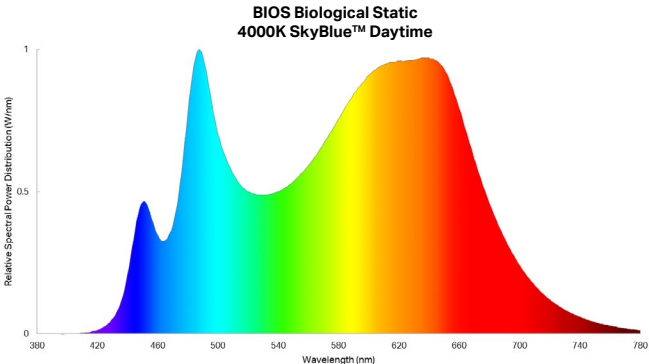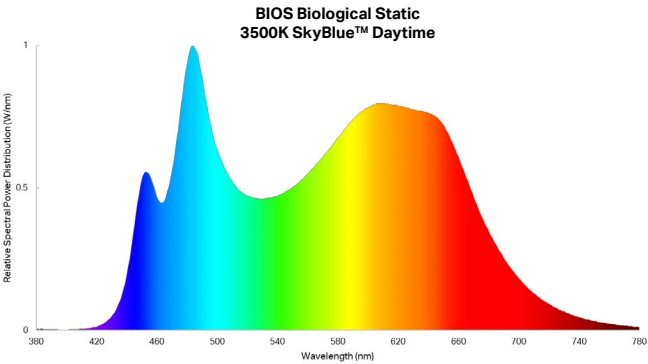

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.


A brand of Legrand

MIGHTY MAC™**SDSA SERIES with BIOS SkyBlue™**

PERFORMANCE	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L ₇₀ LED Life (Hrs)
	Lumen Output (lm)	Efficacy (lm/W)			
45B-35K8	3,587	94	46	100	80,000
45B-40K8	3,895	97			
67B-35K8	5,728	93	74	75	80,000
67B-40K8	6,220	96			



All products tested with the SYM/B lens configuration. Output with other lens configurations will vary. Information subject to change without notice. Visit www.kenall.com for additional information.

Model: SDSA-4-x-y-67B-35K8-DIM1-z-SYM-B-1



Maximum Candela = 2824 Located At Horizontal Angle = 15, Vertical Angle = 5

- 1 - Vertical Plane Through Horizontal Angles (15-195) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

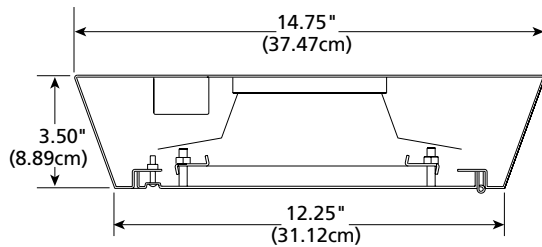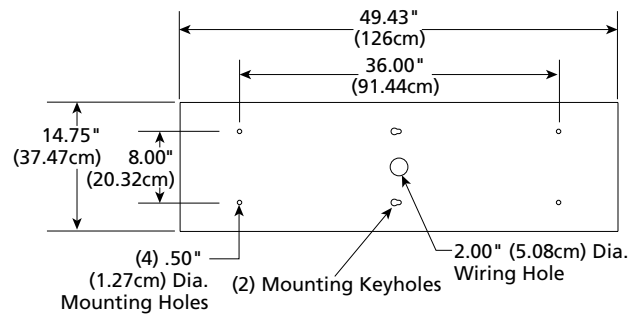DIMENSIONAL DATA**CROSS SECTION****MOUNTING HOLES**

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **legrand**