

# SHERIFF™

## SH548 SERIES FOR WET WALL MOUNT LOCATIONS

### PROJECT INFORMATION

Job Name \_\_\_\_\_


Fixture Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

Approved by \_\_\_\_\_

### PRODUCT FEATURES:

- » Surface wall mount – 5"×48"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage

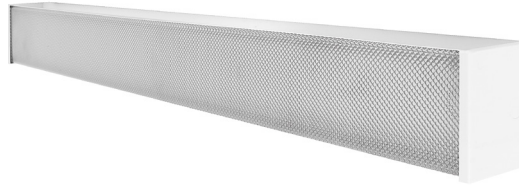

### SPECIFICATIONS

**BASEPLATE:** One-piece 16-gauge CRS baseplate with welded corners. Baseplate provided with six-point mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Lens is positioned in baseplate channels and retained with six stainless steel Torx® fasteners Baseplate/end caps mount flush to wall surface.

**LENS:** Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

**SOCKETS:** Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

**HARDWARE:** Stainless steel Torx® fasteners secure lens in baseplate channel.

**ELECTRICAL:** Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

**INSTALLATION:** Six-point mounting required for Peace of Mind Guarantee®.

**LISTINGS:** UL and CUL listed for Wet Location. (Horizontal wall mount only.)




### ORDERING INFORMATION (Ex: SH548W-2-32-RS-1-DV-FS)

Model	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options	Accessory
<b>SH548W</b>							
<b>Lamp Quantity</b>		<b>Ballast Type</b>		<b>Options</b>			
1	One Lamp	<b>IS</b>	Instant Start Electronic <10% THD (T8)	<b>EL</b>	Standard Lumen Battery Pack (32°F one-lamp operation)		
2	Two Lamps (T5,T8,40B)	<b>RS</b>	Rapid Start Electronic <10% THD (CFL, T8, T5, T5HO)	<b>.187</b>	.187" P12 Polycarbonate Lens		
3	Three Lamps (T8 only)	<b>SB</b>	Specified Ballast	<b>AL</b>	Marine Grade Aluminum Housing		
<b>Lamp Type</b>		<b>Ballast Quantity</b>		<b>BSS</b>	Brush Stainless Steel Housing		
28	F28T5	1	One	<b>DLN</b>	LED Night Light w/Light Level Control (100% - 20%)		
32	F32T8	2	Two	<b>FS</b>	Single Fuse & Holder		
54*	F54T5HO	<b>Voltage</b>		<b>KO</b>	Two 1/2" EMT Conduit Entry Knockouts (one per end cap)		
40B	F40TT (2)	120	120 Volt	<b>OP</b>	Opal Polycarbonate Lens		
		277	277 Volt	<b>PSS</b>	Painted Stainless Steel Housing		
		347	347 Volt	<b>TN</b>	5 Watt Twin Tube NPF Night Light (n/a w/ 347V or DV)		
		DV	120-277 Volts	<b>Accessory</b>			
				<b>9500</b> Torx® Screwdriver			

\*Available with one lamp only

### DIMENSIONAL DATA

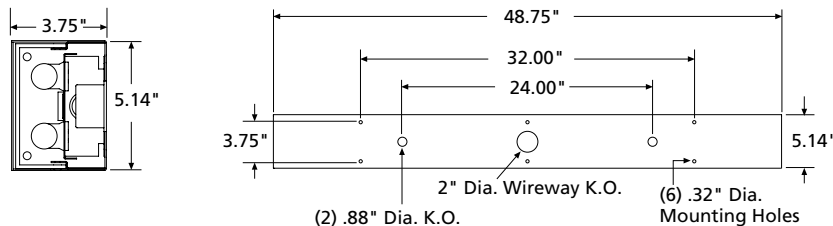

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.