

SHERIFF™

SH596 SERIES

PRODUCT FEATURES:

- » Surface mount – ceiling or wall; 5" x 96"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 16-gauge CRS baseplate and seam welded end caps. Baseplate provided with fourteen mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. See Options for alternative materials and finishes. Lens is positioned in baseplate channels and retained with ten stainless steel Torx® fasteners. Baseplate/end caps mount flush to ceiling or wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® fasteners secure lens in baseplate channel.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

INSTALLATION: Ten point mounting required for Peace of Mind Guarantee®.

WARRANTY: Limited one (1) year Kenall fluorescent warranty. Peace of Mind Guarantee against breakage.

LISTINGS: UL and CUL listed for Wet Locations – covered ceilings only. UL and CUL listed for Damp Locations – wall mount. ADA compliant.



ORDERING INFORMATION (Ex: SH5-96-2-96-RS-1-DV-FS)

Model	Nom. Length	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options	Accessory
SH5	96							

Nominal Length

96 8'

Lamp Quantity (cross section)

- 1 One
- 2 Two
- 3 Three (F32T8 only)

4' Lamp Type

- 28 F28T5
- 32 F32T8
- 54 F54T5HO

8' Lamp Type

- 96 F96T8HO

Ballast Type

- IS Instant Start Electronic <10% THD (T8)
- RS Rapid Start Electronic <10% THD
- SB Specified Ballast

Ballast Quantity

- 1 One
- 2 Two

Voltage

- 120 120 Volt
- 277 277 Volt
- 347 347 Volt (4', T8 only)
- DV 120-277 Volts

Options

- EL Standard Lumen Battery Pack (32°F one-lamp operation)
- PEL High Lumen Battery Pack (32°F one-lamp operation)
- .187 .187" P12 Polycarbonate Lens
- OP Opal Polycarbonate Lens
- AL Marine Grade Aluminum Housing
- BSS Brush Stainless Steel Housing
- PSS Painted Stainless Steel Housing
- FS Single Fuse & Holder
- KO Two 1/2" EMT Conduit Entry Knockouts (one per end cap)
- PM Pendant Mount


Accessory

- 9500 Torx® Screwdriver


*Available with one lamp only

DIMENSIONAL DATA

CROSS SECTION



MOUNTING HOLES

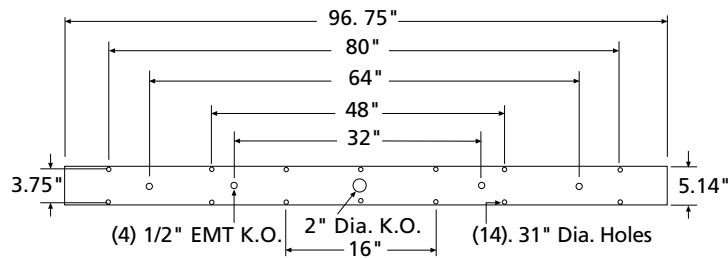

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**