

MIGHTY MAC™

TSQD SERIES

PRODUCT FEATURES:

- » Surface ceiling mount – 20"×20" (50.80 cm × 50.80 cm)
- » Door sealed to housing with closed-cell neoprene gasketing



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS:


- HOUSING:** One-piece seam welded type 304 stainless steel construction standard. See Ordering Information for other material option gauges and finish.
- DOOR:** Type 304 stainless steel construction standard. See Ordering Information for other material option gauges and finish. Door sealed to housing with closed-cell neoprene gasketing.
- LENS:** As specified – maximum thickness .500" (1.27 cm) – see ordering information. Lens sealed to door with silicone caulk and secured with continuous lens retention angles. Kenall recommends a prismatic inner lens and a clear outer lens. Two clear lenses used in combination cannot be provided.
- LENS RETENTION:** Vertically adjustable continuous brackets – prime grade material. Secured to door via thru-studs.
- FASTENERS:** Torx® Head stainless steel fasteners standard. See Options for stainless steel center-pin reject Allen Head (AH) or Phillips Head (PH) fasteners.
- FINISH:** Brushed stainless steel finish (#4) or white TGIC polyester powder coat – 5-stage pre-treatment; Salt spray test: 1,000 hours; Reflectance: 92%.
- LAMPS:** Type as specified – see Ordering Information.
- BALLAST:** 150 Watt induction fluorescent system (150IND) UL listed and approved for use with Icetron™ lamp/ballast by Osram Sylvania. All HID ballasts UL listed HPF type.
- WARRANTY:** Limited one (1) year Kenall fluorescent warranty.
- LISTINGS:** UL listed for Wet Location.



ORDERING INFORMATION (Ex: TSQD-C-0/0-1-100S-120-8/B)

Model	Size	Door/Housing	Lamp Qty	Lamp Type	Voltage	Lens (Inner/Outer)	Options
TSQD	C	/	1			/	
Nominal Size		Lamp Quantity		Voltage		Options	
C 20"×20" (50.80 cm × 50.80 cm)		1 One		120 120 Volts		AH Allen Head fasteners	
				277 277 Volts		PH Phillips Head fasteners	
				347 347 Volts (HID only)		FS Single Fuse & Holder	
				DT 120/277 Volts		SB Specified Ballast (Consult factory)	
				QT 120/208/240/277 Volts (HID only)		SSIN Stainless Steel Interior	
Housing/Door Material		Lamp Type		Lens (Inner/Outer)†			
0 14-Ga CRS (Painted)		100S† 100 Watt HPS		0 No Lens		† Glass interior lens required.	
1 16-Ga CRS (Painted)		150S† 150 Watt HPS		1 .125" (.32 cm) Prismatic Acrylic		* Product UL listed and approved for use with	
2 18-Ga CRS (Painted)		250S† 250 Watt HPS		2 .125" (.32 cm) Prismatic Polycarbonate		Icetron™ lamp/ballast by Osram Sylvania.	
3 14-Ga SS (Painted)		250M† 250 Watt MH		3 .125" (.32 cm) Textured Polycarbonate		‡ Refer to lens specifications	
4 16-Ga SS (Painted)		150IND* 150 Watt Induction Fluorescent		G .125" (.32 cm) Clear Polycarbonate			
6 14-Ga SS (Brushed)				4 .156" (.40 cm) Prismatic Polycarbonate			
7 16-Ga SS (Brushed)				R .156" (.40 cm) Prismatic Tempered Glass			
				6 .187" (.47 cm) Prismatic Polycarbonate			
				7 .187" (.47 cm) Clear Polycarbonate			
				8 .187" (.47 cm) Clear Tempered Glass			
				9 .250" (.64 cm) Clear Polycarbonate			
				A .250" (.64 cm) Clear Tempered Glass			
				B .375" (.95 cm) Clear Polycarbonate			
				C .375" (.95 cm) Clear Tempered Glass			

DIMENSIONAL DATA

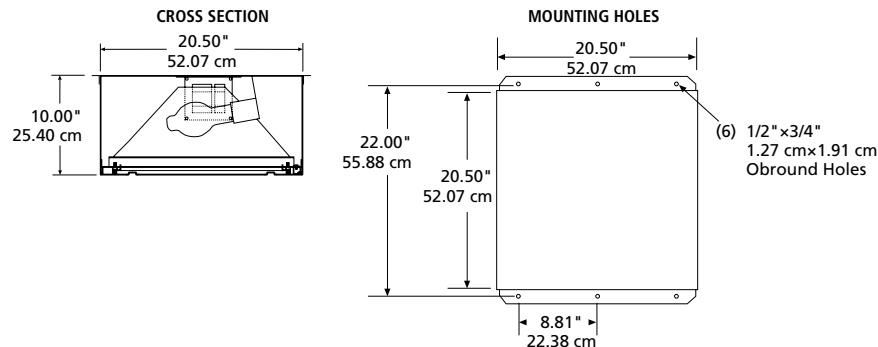

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product can comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **Legrand**