


STRATALUME™

UC SERIES

PRODUCT FEATURES:

- » 5"Wx1.75"Hx2', 3', 4' or 5'L
6"Wx2"Hx2', 3', 4' or 5'L
- » Undercabinet lighting
- » 20-gauge CRS steel housing with choice of solid front or wraparound lens

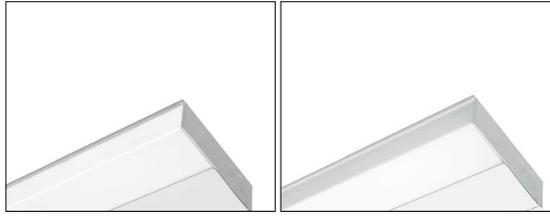

UCDD

UCSD

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Conduit access at ends, top and back of housing. Flush end design for continuous row mounting. See Options for stainless steel type 304 brushed housing (SSH).

LENS: UCDD: High impact, extruded wraparound opal diffuser – 100% DR acrylic. Nominal thickness .065". Pliable non-yellowing lens material snaps in place for quick relamping. UCSD: Flat P12 prismatic acrylic lens. Nominal thickness .125". Pliable non-yellowing lens material lies in place for quick relamping.

ELECTRICAL: Class P and ETL/CBM certified. See Options for integral 120 V Cord & Plug (CP). See Accessory for field installed 120 V Cord & Plug (CPA).

INSTALLATION: Multidirectional keyhole mounting slots – see Cross Section/Details.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.


LISTINGS: UL and CUL listed for Damp Location. Lifetime warranty against defects in workmanship and materials (lamps excluded) for product life of original installation.



ORDERING INFORMATION (Ex: USCD-24-IS-120)

Model	Length/Lamp	Ballast	Voltage	Options	Accessory
Model	Length/Lamp	Ballast	Voltage	Options	
UCDD Luminous Front	24 2' one 17 Watt (F17T8)	IS Instant Start Electronic <10% THD	120 120 Volts	BW Batwing Distribution Lens (UCSD only)	
UCSD Solid Front	36 3' one 25 Watt (F25T8)	RS Rapid Start Electronic <10% THD	277 277 Volts	CO 120V Convenience Outlet – Non-GFI Receptacle	
	48 4' one 32 Watt (F32T8)	SB Specified Ballast		CP Cord & Plug (120V only) (specify left, right, top, or back location)	
	60 5' one 40 Watt (F40T8)			FS Single Fuse & Holder	
				MS Motion Sensor	
				SSH Stainless Steel Type 304 Brushed Housing	
				SW Rocker Switch	
				Accessory	
				CPA Cord & Plug Wiring Kit (120V only)	

DIMENSIONAL DATA

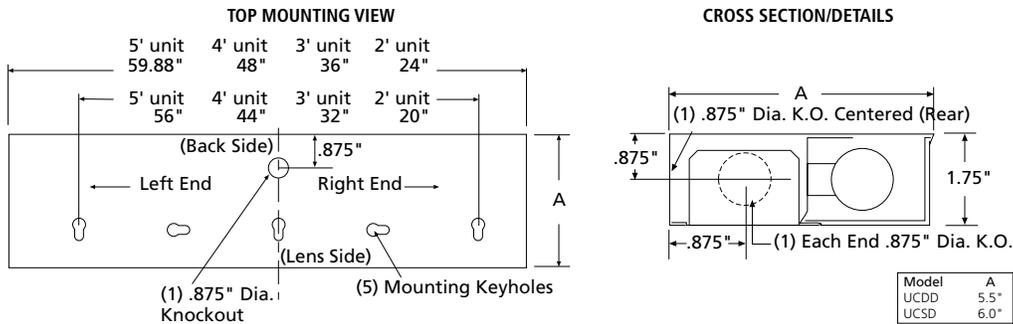

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**