

# SIMPLESEAL™

## CSEFI SERIES – LF

### PRODUCT FEATURES:

- » Recessed ceiling mount – flange; 1'x4', 2'x2', 2'x4'
- » IP65 Rated
- » Continuous row mount for multiple luminaires



### PROJECT INFORMATION

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

Approved by \_\_\_\_\_

### SPECIFICATIONS

**HOUSING:** 20-gauge CRS. Hole-free seam welded construction. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

**HOUSING FLANGE:** 18-gauge CRS. Mitered and welded corners then spot-welded to housing.

**DOORFRAME:** 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe secured to housing with aircraft cables and (8) for 1'x4', 2'x2', (10) for 2'x4' captive mounted Phillips head stainless steel fasteners. Doorframe Gasket: Closed cell extruded silicone gasket seals doorframe to housing.

**LENS:** .125" P12 acrylic lens sealed to doorframe with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out.

**ELECTRICAL:** Fluorescent electronic ballasts (<10% THD). Lamps by others. See Electrical Options for additional options.

**INSTALLATION:** Adjustable swing-out mounting brackets standard.

**WARRANTY:** Limited one (1) year Kenall fluorescent warranty.

**LISTINGS:** UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. Meets K230 Leakage Standard for luminaire leakage in pressurized environments and FED-STD-209E/Class 100 (ISO 5) Cleanrooms. Optional radiated and conducted emissions controlled as per MIL-STD-461F.



### ORDERING INFORMATION (Ex: CSEFI24T5-2-54-IS-1-120-2F-2H-1)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe	Housing	Lens Type	Options
<b>Model</b>	<b>2x2 – T8</b>	<b>Doorframe Options</b>					<b>Lens Type</b>	
CSEFI14T5	1'x4'	2-17	Two F17T8		2F	18-Ga CRS Painted (STD)	<b>Acrylic</b>	
CSEFI22T5	2'x2'	3-17	Three F17T8		AF**	Anodized Aluminum	1	.125" #12 Prismatic (STD)
CSEFI24T5	2'x4'	4-17	Four F17T8		PAF	.063" Painted Fabricated Aluminum	T	.125" Clear
CSEFI14T8	1'x4'	6-17	Six F17T8		5F	20-Ga Type 304 SS Brushed	U	.125" #12 Prismatic Impact Blend
CSEFI22T8	2'x2'	2-31U	Two F31T8-1.625"U					
CSEFI24T8	2'x4'	3-31U	Three F31T8-1.625"U					
<b>Lamp Qty/Lamp Type</b>	<b>2x4 – T5</b>	<b>Housing/Flange Options</b>					<b>Polycarbonate</b>	
<b>1x4 – T5</b>	2-28†	2H	Two F28T5		5H5	20-Ga Type 304 SS/18-Ga Type 304 SS	2	.125" #12 Prismatic
1-28†	3-28†	2H5	Three F28T5		2H5	20-Ga CRS/18-Ga Type 304 SS	G	.125" Clear
2-28†	4-28†	PAH	Four F28T5			.050" (.13cm) Painted Aluminum	6	.187" #12 Prismatic
3-28†	6-28†		Six F28T5					
1-54	2-54		Two F54T5HO				<b>Tempered Glass</b>	
2-54	3-54		Three F54T5HO				TG	.156" Textured Tempered Glass
3-54	4-54		Four F54T5HO					
	6-54		Six F54T5HO					
<b>1x4 – T8</b>	<b>2x4 – T8</b>	<b>Military Standard Listed</b>						
1-32	2-32	S	One F32T8					.125" P12 Acrylic with EMI Grid, Prismatic Side Out
2-32	3-32		Two F32T8					
3-32	4-32		Three F32T8					
	6-32		Six F32T8					
<b>2x2 – T5</b>	<b>Ballast Type</b>	<b>Specified Lens</b>						
2-14†	IS	SL	Two F14T5					Specified Lens
3-14†	RS		Three F14T5					
4-14†	SB		Four F14T5					
2-24†			Two F24T5HO					
3-24†			Three F24T5HO					
4-24†			Four F24T5HO					
	<b>Ballast Quantity</b>							
	1							
	2							
	<b>Voltage</b>							
	120							
	277							
	347							
								*n/a w/three (3) F54T5HO on 1x4 and six (6) F54T5HO on 2x4
								•n/a with four (4) F550T or F55T lamps
								†n/a with 347V



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144


When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

CSEFI\_14\_22\_24-101618

# SIMPLESEAL™

## CSEFI SERIES – LF

### DIMENSIONAL DATA

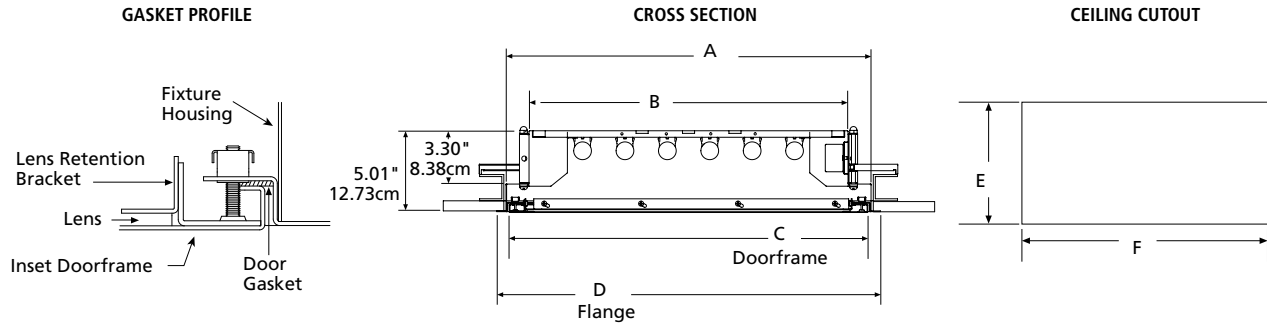

DIMENSIONAL DATA (IN INCHES & CENTIMETERS)						
	A	B	C	D	E	F
<b>1x4 T5</b>	12.20x46.60	9.35x46.60	11.80x46.20	13.35x47.75	12.50	46.88
<b>30.48cmx121.92cm</b>	30.99x118.36	23.75x118.36	29.97x117.35	33.91x121.29	31.75	119.08
<b>2x2 T5</b>	22.60x22.60	19.75x22.60	22.20x22.60	23.75x23.75	22.88	22.88
<b>60.96cmx60.96cm</b>	57.40x57.40	50.17x57.40	56.39x57.40	60.33x60.33	58.12	58.12
<b>2x4 T5</b>	22.60x46.60	19.75x46.60	22.20x46.20	23.75x47.75	22.88	46.88
<b>60.96cmx121.92cm</b>	57.40x118.36	50.17x118.36	56.39x117.35	60.33x121.29	58.12	119.08
<b>1x4 T8</b>	12.20x48.13	9.35x48.13	11.80x47.70	13.35x49.27	12.50	48.38
<b>30.48cmx121.92cm</b>	30.99x122.25	23.75x122.25	29.97x121.16	33.91x125.15	31.75	122.89
<b>2x2 T8</b>	22.60x24.13	19.75x24.13	22.20x25.70	23.75x25.27	22.88	24.38
<b>60.96cmx60.96cm</b>	57.40x61.29	50.17x61.29	56.39x65.28	60.33x64.19	58.12	61.93
<b>2x4 T8</b>	22.60x48.13	19.75x48.13	22.20x47.70	23.75x49.27	22.88	48.38
<b>60.96cmx121.92cm</b>	57.40x122.25	50.17x122.25	56.39x121.16	60.33x125.15	58.12	122.89

NOTE: Add .25" (.64cm) to each cut-out dimension when Install Frame (IF) or Plaster Frame (PF) Accessory is specified.



[www.kenall.com](http://www.kenall.com)

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

CSEFI\_14\_22\_24-101618