

SIMPLESEAL™

HSESI SERIES – LF SURFACE MOUNT – INSET DOOR

PRODUCT FEATURES:

- » Ceiling mount – 1'x4', 2'x2', 2'x4'
- » One-piece inset doorframe secured to housing with aircraft cables
- » 18-gauge, hole-free one-piece cold rolled steel housing
- » Closed cell extruded silicone gasket seals doorframe to housing
- » Hazardous Location Listings include Class I, Division 2, Groups A, B, C, D



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS:

HOUSING: 18-gauge CRS. Hole-free one-piece seam welded construction. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: .125" (.32cm) P12 acrylic lens sealed to doorframe with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out.

DOORFRAME: 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe secured to housing with aircraft cables and (8) for 1x4 (30.48cmx121.92cm), 2x2 (60.96cmx60.96cm), or (10) for 2x4 (60.96cmx121.92cm) captive mounted Phillips head stainless steel fasteners. Closed cell extruded silicone gasket seals doorframe to housing.

ELECTRICAL: Fluorescent electronic ballasts (<10% THD). Lamps by others. See Electrical Options for additional options.

INSTALLATION: Four .312" (.79cm) holes for surface mounting.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone. Standard Hazardous Location Listings include Class I, Division 2, Groups A, B, C, D.



ORDERING INFORMATION (Ex: HSESI14-2-32-IS-1-120-2F-2H-1)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe Option	Housing	Lens Type	Options
Model		Ballast Type			Doorframe Options		Lens Type	
HSESI14 1'x4'		IS Instant Start Electronic <10% THD			2F 18-Ga CRS Painted (STD)		Acrylic	
HSESI22 2'x2'		RS Rapid Start Electronic <10% THD			AF Anodized Aluminum		1 .125" #12 Prismatic (STD)	
HSESI24 2'x4'		SB Specified Ballast			PAF Painted Fabricated Aluminum		T .125" Clear	
					5F 20-Ga Type 304 SS Brushed		U .125" #12 Prismatic Impact Blend	
Lamp Quantity/Type		Ballast Quantity			Housing Options		Polycarbonate	
1x4		1 One			2H 18-Ga CRS (STD)		2 .125" #12 Prismatic	
1-32 One F32T8		2 Two			5H 18-Ga Type 304 SS		G .125" Clear	
2-32 Two F32T8		Voltage			PAH .050" Painted Aluminum		6 .187" #12 Prismatic	
3-32 Three F32T8		120 120 Volts					Tempered Glass	
		277 277 Volts					TG .156" Textured Tempered Glass	
2x2							Specified Lens	
2-17 Two F17T8							SL Specified Lens	
3-17 Three F17T8							Options	
4-17 Four F17T8							FS Fuse & Holder	
6-17 Six F17T8							HJ Sealed Wireway	
2-31U Two F31T8 – 1.625" U							TH 1/2" Trade Size Threaded Hub	
3-31U Three F31T8 – 1.625" U							TWA Top Wiring Access Wiring Hole	
2x4								
2-32 Two F32T8								
3-32 Three F32T8								
4-32 Four F32T8								
6-32 Six F32T8								

HAZARDOUS LOCATION T-RATINGS	
Lamp Type	Operating Temp/Temp Code
F32T8	85° C/T6
F17T8	100° C/T5
F31T8	100° C/T5



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144


When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

HSESI_14_22_24-101818

SIMPLESEAL™

HSESI SERIES – LF SURFACE MOUNT – INSET DOOR

DIMENSIONAL DATA

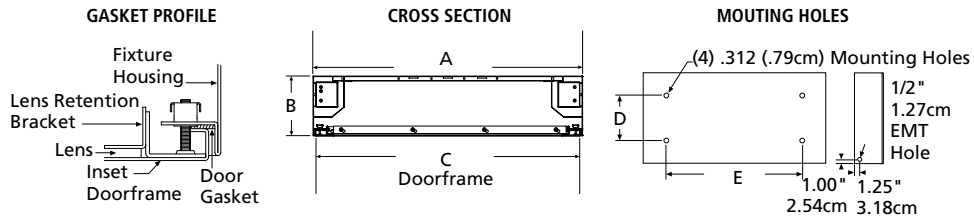

DIMENSIONAL DATA (IN INCHES & CENTIMETERS)

	A	B	C	D	E
1×4	10.60×48.13	5.00	10.20×47.70	6.00	28.00
30.48cm×121.92cm	26.92×122.25	12.70	25.91×121.16	15.24	71.12
2×2	22.60×24.13	5.00	22.20×23.70	12.00	12.00
60.96cm×60.96cm	57.40×61.29	12.70	56.39×60.20	30.48	30.48
2×4	22.60×48.13	5.00	22.20×47.70	12.00	36.00
60.96cm×121.92cm	57.40×122.25	12.70	56.39×121.16	30.48	91.44

