

MEDMASTER™ Surgical Suite Luminaires

M2SE SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount – flange; 2'x4'
- » One-piece sealed housing and doorframe for infection control
- » Smooth exterior lens for cleanability
- » Sureshield™ mesh filter reduces radiated emissions
- » Radiated and conducted emissions controlled as per MIL-STD-461F.



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS, hole-free seam welded construction. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Antimicrobial finish standard on all exposed painted surfaces of installed luminaire.

HOUSING FLANGE: 18-gauge CRS. Mitered and welded corners then spot-welded to housing before painting.

DOORFRAME: 18-gauge CRS, one-piece inset construction welded corners. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe secured to housing with stainless steel aircraft cables and captive flush mounted Phillips head stainless steel fasteners. Antimicrobial finish standard on all exposed painted surfaces of installed luminaire.

DOORFRAME GASKET: One-piece closed cell silicone gasket seals doorframe to housing.

LENS: Two piece design. Smooth lens exterior is .125" clear acrylic, sealed to doorframe with silicone sealant. Interior lens is .030" acrylic micro linear prism, both lenses mechanically secured in place. See options for alternate lens.

OPTICS: Symmetric reflectors are CRS with a high reflectance powder coated surface. Asymmetric reflectors are premium 95% specular aluminum. Green phosphor lamp (GL Option) located in symmetric reflector area (see Cross Section right). Light direction reflectors are field changeable.

SURESHIELD™: Stainless steel mesh filter reduces radiated emissions.

ELECTRICAL: Electronic ballast <10% THD. Programmed-Start, low voltage electronic dimming ballast (DM7) designed to operate T8 or T5HO fluorescent lamps over a full range of light output (100-3% T8; 100-1% T5HO). Minimum Power Factor .98 for T5HO and .99 for T8. THD at full light output 10%. Operates from compatible 0-10VDC controllers on Class 1 or Class 2 low voltage systems. See Ordering Information for alternate or multiple ballasts and optional equipment. Lamps by others. RFI suppressor standard – one per circuit, one circuit standard.

INSTALLATION: Adjustable swing-out mounting brackets.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. CCEA approved. NSF2 Splash/Non-Food Zone. Meets K230 Leakage Standard for luminaire leakage in pressurized environments and FED-STD-209E/Class 100 (ISO 5) Cleanrooms. Radiated and conducted emissions controlled as per MIL-STD-461F (standard with electronic and electronic dimming ballasts).



ORDERING INFORMATION (Ex: M2SEFI24-4-28-RS-L2-120-2F-2H-MLP)

Model	Lamp Qty	Lamp Type	Ballast Type	Lighting Levels	Voltage	Doorframe	Housing/Flange	Lens Type	Options	
M2SEFI24										
Lamp Quantity				Lighting Levels – See chart below for ballast and RFI information		Housing/Flange Options		Options		
4	Four			L1	One (STD)	2H	20-Ga CRS/18-Ga CRS (Antimicrobial) (STD)	EL	One-Lamp Indoor Battery Pack (32°F)	
6	Six			L2	Two	5H	20-Ga Type 304 SS	FS	Fuse & Holder	
4/2	Four White/Two Green			L3	Three (6 Lamps Only)	2H5	20-Ga CRS/20-Ga Type 304 SS	GL	Green Phosphor Lamps (32W T8, 550nm only, 2 lamps included)	
Lamp Type				LD	Dimmable	PAH	.050" Painted Aluminum (Antimicrobial)	HD	Hinged Door (w/o NSF listings)	
28	F28T5			Voltage				HJ	Sealed Wireway	
32	F32T8			120	120 Volts			IF	Install Frame	
32/32	Four White/Two Green			277	277 Volts			PF	Plaster Frame (add .25" to ceiling cutout)	
54	F54T5HO (4 Lamp Max.)			Doorframe Options				RM	Continuous Row Mount	
Ballast Type				2F	18-Ga CRS Painted (Antimicrobial) (STD)					
IS	Instant Start Electronic <10% THD (T8)			AF	Anodized Extruded Aluminum					
RS	Rapid Start Electronic <10% THD (T8,T5,T5HO)			PAF	Painted (Antimicrobial) Fabricated Aluminum					
DM7	Low Voltage Electronic Dimming Ballast			5F	18-Ga Type 304 SS Brushed					
								Lens Type		
								MLP		Micro Linear Prism (STD)
								SL		Specified Lens

Lighting Levels – Ballast and RFI Information				
LAMPS	LEVEL 1	LEVEL 2	LEVEL 3	VARIABLE LEVEL (DIMMING)
(6) T8 Lamps	(2) 3 lamp ballasts + (1) RFI filter	(1) 4 lamp(1) 2 lamp ballasts + (2) RFI filters	(3) 2 lamp ballasts + (3) RFI filters	(2) 3 lamp dimming ballasts + (2) RFI filters
(4) T8 Lamps	(1) 4 lamp ballasts + (1) RFI filter	(2) 2 lamp ballasts + (2) RFI filters	N/A	(2) 2 lamp dimming ballasts + (2) RFI filters
(4) T8 Lamps + (2) T8 Green	N/A	(1) 4 lamp + (1) 2 lamp ballast (green) + (2) RFI filters	(2) 2 lamp + (1) 2 lamp ballast (green) + (3) RFI filters	(2) 2 lamp dimming ballasts + (1) 2 lamp dimming ballasts (green) + (3) RFI filters
(4) T5HO Lamps	(2) 2 lamp ballasts + (1) RFI filter	(2) 2 lamp ballasts + (2) RFI filters	N/A	(2) 2 lamp dimming ballasts + (2) RFI filters



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144


When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2015 Kenall Mfg. Co. All rights reserved.

M2SEFI24-012714

MEDMASTER™ Surgical Suite Luminaires

M2SE SERIES

DIMENSIONAL DATA

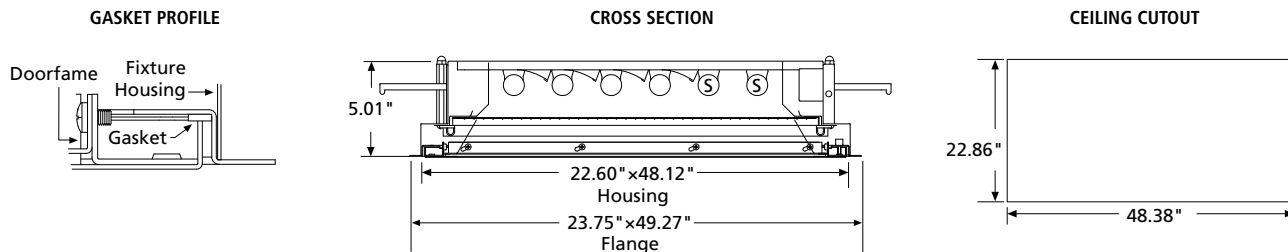

www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2015 Kenall Mfg. Co. All rights reserved.