

MILLENIUM™ ROUND

MR13 SERIES – DEEP PROFILE HOUSING

PROJECT INFORMATION

Job Name _____


Fixture Type _____

Catalog Number _____

Approved by _____

PRODUCT FEATURES:

- » Surface mount – ceiling (n/a with MR13ED) or wall; 13" Dia. x 6.5" D
- » Peace of Mind Guarantee® against breakage
- » Dust and water protected to IP64 standards

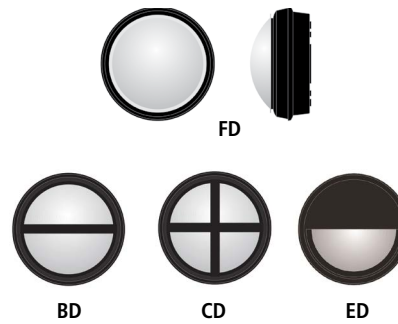

SPECIFICATIONS

HOUSING: Marine grade die-cast aluminum. Rib reinforced construction. Integral heat sinks. Housing flange interlocks and wraps around lens base producing maximum moisture deflection and resistance to prying. Housing provided with four-point mounting holes, one wireway hole and temporary junction box mounting drill points. Standard matte black, dark bronze or matte white exterior TGIC polyester powder coat – 5-step pre-treatment. See Ordering Information for optional finishes.

REFLECTOR: Full reflector/wire cover – 92% reflectivity.

LENS: UV-stabilized, high impact resistant, virgin injection molded polycarbonate. High efficiency blondel fluted lens maximizes uniformity. Close tolerance push/turn/lock-in-place mating of injection molded lens and lens base. Lens and lens base secured with one concealed captive Torx® with center pin fastener.

LENS BASE: High impact resistant, injection molded matte black, dark bronze or matte white polycarbonate. Optional Light Gray, Silver, Forest Green or Custom Color (see Ordering Information below) are chemically bonded, impact resistant finishes.

GASKETING: Die-cut, closed cell neoprene self adhesive gasket seals housing to mounting surface. Closed cell, silicone "O" ring gaskets positioned and friction secured in gasket channels of lens base and housing.

HARDWARE: One stainless steel Torx® with center pin fastener.

ELECTRICAL: Available in 3500K, 4000K, and 5000K color temperatures, 80 CRI. 120-277VAC, 50/60Hz electrical input with high power factor electronic, constant-current driver (>.90 PF). Standard 0-10V dimming with 1-100% range; maximum driver source of 200 µA. Optional embedded microwave motion sensor (MS) has factory default settings of 20 minute time out, dims down to 30%.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: Luminaire is certified to UL Standards by either Underwriters Laboratory or Intertek Testing Laboratory for Wet Location (listing includes Emergency Battery Pack "LEL" option). UL certified IP64 per IEC 60598.



ORDERING INFORMATION (Ex: MR13BD-PP-DB-20L40K-DV)

Model	Lens Type	Finish	Lamp Type	Voltage	Options	Accessories
PP						
Model			Lamp Type		Options	
MR13BD	Bar		10L35K	10 Watt 3500K LED	LEL	LED Emergency Battery Backup (n/a with 347V, n/a with 50L)
MR13CD	Cross		10L40K	10 Watt 4000K LED	BPC†	Photo Control – Shielded Button Type (120V or 277V only)
MR13ED	Eyelid		10L50K	10 Watt 5000K LED	10KV	IEEE C62.41.2 C High Surge Protector
MR13FD	Full Face		20L35K	20 Watt 3500K LED	FS	Single Fuse & Holder
			20L40K	20 Watt 4000K LED	NAT	Natorium Environment Option
			20L50K	20 Watt 5000K LED	MS	Motion Sensor (n/a with 347V)
Lens Type			50L35K*	50 Watt 3500K LED		
PP	Pearlescent Polycarbonate		50L40K*	50 Watt 4000K LED		
			50L50K*	50 Watt 5000K LED		
Finish			Voltage			
DB	Dark Bronze		120	120 Volts	*	n/a with MR13ED
FG	Forest Green		277	277 Volts	†	BPC n/a in conjunction with MS option
LG	Light Gray		347	347 Volts		
MB	Matte Black		DV	120-277 Volts		
MW	Matte White					
SL	Silver					
CC	Custom Color (Consult factory)					



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

MR13_D-100918


MILLENNIUM™ ROUND

MR13 SERIES – DEEP PROFILE HOUSING

PERFORMANCE		Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (hrs)
Model	Lamp Type	@ 25°C (lm)	Efficacy (lm/W)			
MR13FD	10L35K	1,166	90	13	94	130,000
	10L40K	1,166	90	13	94	130,000
	10L50K	1,271	98	13	94	130,000
	20L35K	2,250	96	24	94	130,000
	20L40K	2,250	96	24	94	130,000
	20L50K	2,453	104	24	94	130,000
	50L35K	5,204	92	56	117	60,000
	50L40K	5,204	92	56	117	60,000
50L50K	5,672	101	56	117	60,000	
MR13BD	10L35K	1,026	79	13	94	130,000
	10L40K	1,026	79	13	94	130,000
	10L50K	1,118	86	13	94	130,000
	20L35K	1,980	84	24	94	130,000
	20L40K	1,980	84	24	94	130,000
	20L50K	2,158	92	24	94	130,000
	50L35K	4,579	81	56	117	60,000
	50L40K	4,579	81	56	117	60,000
50L50K	4,991	88	56	117	60,000	
MR13CD	10L35K	936	72	13	94	130,000
	10L40K	936	72	13	94	130,000
	10L50K	1,020	79	13	94	130,000
	20L35K	1,807	77	24	94	130,000
	20L40K	1,807	77	24	94	130,000
	20L50K	1,969	84	24	94	130,000
	50L35K	4,178	74	56	117	60,000
	50L40K	4,178	74	56	117	60,000
	50L50K	4,554	81	56	117	60,000
MR13ED	10L35K	871	67	13	94	130,000
	10L40K	871	67	13	94	130,000
	10L50K	950	73	13	94	130,000
	20L35K	1,682	72	24	94	130,000
	20L40K	1,682	72	24	94	130,000
	20L50K	1,833	78	24	94	130,000


Info subject to change. Visit www.kenall.com for IES files and additional information.

Model: MR13FD-PP-MW-50L40K-DCC-DV



Max Candela = 1708 Located At Horizontal Angle = 0, Vertical Angle = 0
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: MR13ED-PP-MW-20L40K-DCC-DV



Max Candela = 628 Located At Horizontal Angle = 0, Vertical Angle = 65
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701


10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.

MILLENIUM™ ROUND

MR13 SERIES – DEEP PROFILE HOUSING

DIMENSIONAL DATA

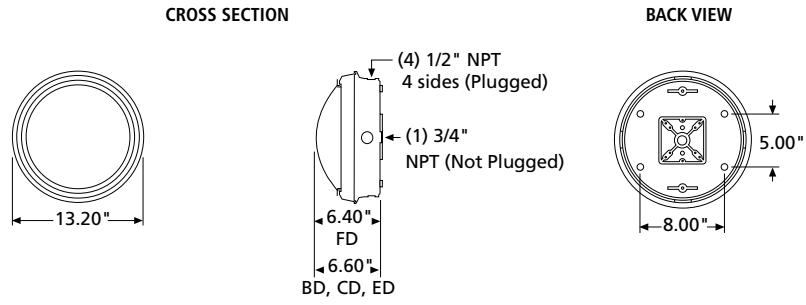

www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.