


STRATALUME™

UC SERIES

PRODUCT FEATURES:

- » 5"Wx1.75"Hx2', 3', 4' or 5'L
6"Wx2"Hx2', 3', 4' or 5'L
- » Undercabinet lighting
- » 20-gauge CRS steel housing with choice of solid front or wraparound lens

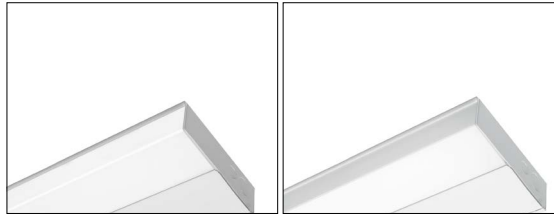

UCDD

UCSD

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Conduit access at ends, top and back of housing. Flush end design for continuous row mounting. See Options for stainless steel type 304 brushed housing (SSH).

LENS: UCDD: High impact, extruded wraparound opal diffuser – 100% DR acrylic. Nominal thickness .065". Pliable non-yellowing lens material snaps in place for quick relamping. UCSD: Flat P12 prismatic acrylic lens. Nominal thickness .125". Pliable non-yellowing lens material lies in place for quick relamping.

ELECTRICAL: Class P and ETL/CBM certified. See Options for integral 120 V Cord & Plug (CP). See Accessory for field installed 120 V Cord & Plug (CPA).

INSTALLATION: Multidirectional keyhole mounting slots – see Cross Section/Details.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.


LISTINGS: UL and CUL listed for Damp Location. Lifetime warranty against defects in workmanship and materials (lamps excluded) for product life of original installation.



ORDERING INFORMATION (Ex: UCSD-24-IS-120)

| Model | Length/Lamp | Ballast | Voltage | Options | Accessory |
|---------------------|---------------------------|--------------------------------------|---------|---|-----------|
| Model | Length/Lamp | Ballast | | Options | |
| UCDD Luminous Front | 24 2' one 17 Watt (F17T8) | IS Instant Start Electronic <10% THD | | BW Batwing Distribution Lens (UCSD only) | |
| UCSD Solid Front | 36 3' one 25 Watt (F25T8) | RS Rapid Start Electronic <10% THD | | CO 120V Convenience Outlet – Non-GFI Receptacle | |
| | 48 4' one 32 Watt (F32T8) | SB Specified Ballast | | CP Cord & Plug (120V only) (specify left, right, top, or back location) | |
| | 60 5' one 40 Watt (F40T8) | | | FS Single Fuse & Holder | |
| | | Voltage | | MS Motion Sensor | |
| | | 120 120 Volts | | SSH Stainless Steel Type 304 Brushed Housing | |
| | | 277 277 Volts | | SW Rocker Switch | |
| | | | | Accessory | |
| | | | | CPA Cord & Plug Wiring Kit (120V only) | |

DIMENSIONAL DATA

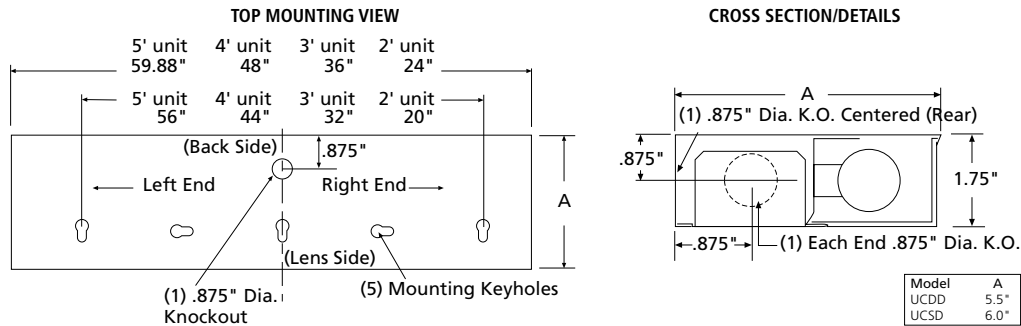

www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2018 Kenall Mfg. Co. All rights reserved.