

EPC SERIES

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. DISCONNECT POWER TO ALL CIRCUITS BEFORE WIRING FIXTURE. INSTALL IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL CODES. DO NOT CONNECT TO AN UNGROUNDED SUPPLY. READ ALL FIXTURE MARKINGS AND LABELS TO ENSURE CORRECT INSTALLATION OF FIXTURE. SUPPLEMENTAL INSTRUCTIONS MAY BE LOCATED ON THE FIXTURE, IN ADDITION TO THIS INSTRUCTION SHEET, REGARDING ORIENTATION, OR MOUNTING RESTRICTIONS.



OVERVIEW


EPC Series fixtures are designed to be suspended, pendant or surface mounted. Supplied stainless steel mounting straps are fully adjustable along the length and provide 90 degree (45 degrees each side) rotational aiming. Fixtures are pre-wired with a 72" oil and water resistant outdoor cable. Connection to electrical service must be made using approved water tight connector or plug and receptacle.

SAVE THESE INSTRUCTIONS

**SUSPENDED MOUNTING
Installation**

- 1: Remove spade screw, washer and sealing washer. Remove the end cap from the end without the cable.
- 2: Remove the tube and install lamps.
- 3: Replace the tube and end cap. Replace the sealing washer, washer and secure by tightening the spade screw.

- 4: Wrap the two supplied stainless steel straps around the tube and secure by pulling the tab to lock into the slot on the other side.

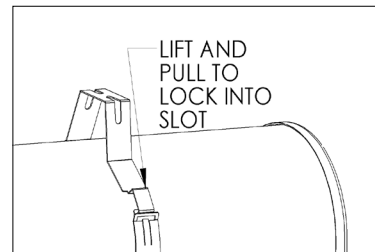


- 5: Hang the fixture by attaching to user supplied chain or cables. Adjust the mounting straps along the length of the fixture as needed.
- 6: Connect the cable to the appropriate electrical service. Black wire to supply, white wire to neutral and green wire to ground.



SURFACE MOUNTING

Installation

- 1:** Remove spade screw, washer and sealing washer. Remove the end cap from the end without the cable.
- 2:** Remove the tube and install lamps.
- 3:** Replace the tube and end cap. Replace the sealing washer, washer and secure by tightening the spade screw.
- 4:** Wrap the two supplied stainless steel straps around the tube and secure by pulling the tab to lock into the slot on the other side.
- 5:** Attach the two supplied stainless steel brackets to the ceiling or structure with user supplied hardware.
- 6:** Mount the fixture straps to the brackets using the supplied screws, washers and nuts. Be sure no threads are exposed after tightening. Any exposed threads must be covered using appropriate user supplied cap.
- 7:** Connect the cable to the appropriate electrical service. Black wire to supply, white wire to neutral and green wire to ground.



PENDANT MOUNTING

Mounting straps are available for either 3/8 or 1/2 pendants. These should be specified when ordering. Check for proper straps before starting installation.

Installation

- 1:** Remove spade screw, washer and sealing washer. Remove the end cap from the end without the cable.
- 2:** Remove the tube and install lamps.
- 3:** Replace the tube and end cap. Replace the sealing washer, washer and secure by tightening the spade screw.
- 4:** Wrap the two supplied stainless steel straps around the tube and secure by pulling the tab to lock into the slot on the other side.
- 5:** Mount fixture by attaching straps to pendants, supplied by user.
- 6:** Connect the cable to the appropriate electrical service. Black wire to supply, white wire to neutral and green wire to ground.

RE-LAMPING

Before starting any servicing, turn off the power to the fixture and allow the lamps to cool.

- 1:** To replace the lamps, remove end cap, Step 1 above.
- 2:** Replace lamps and reinstall tube, end cap and hardware.

CUSTOMER SERVICE

For technical assistance, call 1-800-4KENALL (1-800-453-6255).

WARRANTY

For warranty information visit www.kenall.com/Resources/Certified-Performance-Warranties

