

# MEDMASTER™ SATURN

## BHSD SERIES – DUAL-ENGINE LAMPING

### PRODUCT FEATURES:

- » Center and perimeter light engines with independent illumination and control
- » Center light engine with static white LED
- » Perimeter light engine with static white, static color, RGB or switchable (white and color)
- » Surface wall or ceiling installation
- » 14" or 18" nominal diameter with 2" overall depth
- » IK10 impact rating and Peace of Mind Guarantee® against breakage
- » NSF2 Rating for product cleanability



### SPECIFICATIONS

**HOUSING:** Die-cast aluminum baseplate and frontal heat sink trim. Standard TGIC polyester powder coat finish on aluminum components with five-step pre-treatment to withstand 1,000-hour salt spray test per ASTM B117. See Ordering Information for available finishes.

**OPTICAL:** Injection-molded diffused UV-stabilized polycarbonate outer lenses for center and perimeter light engines. Center light engine utilizes inner acrylic light guide to provide uniformity from edge-lit light source.

**LAMPING:** Center: 360° edge-lit illumination. Available 3000K, 3500K and 4000K white color temperatures with 3-step MacAdam variation allowance. Standard 80 CRI min, optional 90 CRI min. Perimeter: Circumferential back-lit lamping. Available matching color temperature source to center white light engine. Available static color source in 630 nm native red, 590 nm native amber, phosphor-converted mint or 500 nm cyan; inquire with factory on other available static color options. Available Switchable engine on 18" model provides white light and native amber or native red, controlled by internal device based on signal input; see Control for further description. Available RGB (red-green-blue) in 14" model for dynamic and mixed lighting scenes. 18" model features RGBW perimeter lamping which includes a 2500K, 70 CRI white LED for the broadest color gamut and white color matching; a 90 CRI center lamp color is recommended in conjunction. The RGB(W) package uses phosphor-converted red, phosphor-converted green and native blue source for longevity.

**ELECTRICAL:** 120-277VAC, 50/60Hz electrical input with serviceable high-power factor electronic, constant-current drivers (<20% THD, >0.90 PF). 347VAC input available in DIM1 driver configurations. DIM1: Standard 0-10V dimming with 1-100% range and dim-to-dark capabilities; independent dimming control of center and perimeter lamping functions. 0.2mA source current per luminaire, per dimming line. DALI: Optional DALI-2 DT6 driver with 1-100% dimming range without dim-to-dark capabilities. Independent addressing and control of lamping functions. DMX: DMX-RDM compatible driver with 0.1-100% dimming range and dim-to-dark. (14" model) One four-channel driver powers both the static white center and the RGB perimeter lamp functions; four total DMX network addresses. (18" model) One driver powers the static white center and another driver powers the RGBW perimeter; five total DMX network addresses.

**SENSOR & CONTROLS:** (18" Model) Optional embedded microwave motion sensor (MS) mounted behind center diffuser. Factory default is 30% dimming and 20min. timeout. Custom settings available upon request. Sensor operates at 5.8 GHz (continuous-wave radar) and provides 360° coverage. Switchable perimeter lamping utilizes Kenall-developed internal device to switch between white or colored sources based on voltage of sensing input (10V = white, ≤5V = color). When MS option is ordered in conjunction with switchable perimeter, the product is factory wired to have both lamp functions operate in white output state during occupancy. In periods of unoccupancy, the center lamp turns off and the perimeter changes to the specified color. This is intended to be a 'night light' or 'wildlife friendly' operational mode. To see the full list of third-party compatible controls, [click here](#).

**INSTALLATION:** Suitable for surface wall or ceiling installations over recessed junction box. 0°C to 40°C ambient environments, unless otherwise noted. Anchored four-point mounting required. Trim assembly secured to baseplate with three (3) concealed, tamper-resistant Torx® fasteners.

**PHOTOMETRICS:** Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to [www.kenall.com](http://www.kenall.com).

**WARRANTY:** Limited five (5) year LED warranty. Peace of Mind Guarantee against breakage.

**LISTINGS:** Luminaire is certified to UL Standards by Intertek Testing Laboratory for Lamp Locations; listing includes Emergency Battery Pack "LEL" option. NSF2 Splash/Non-Food Zone rated. Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.



### ORDERING INFORMATION (Ex: BHSD14-CC-PP-16L/16RGB-35K8-DMX-DV)

Model	Finish	Optic Type	Lamp Type (Center/Perimeter)	Lamp Color	Driver	Voltage	Options
		<b>PP</b>	<b>/</b>				
<b>Model</b>			<b>Lamp Type: Perimeter Engine</b>		<b>Driver Type</b>		
<b>BHSD14</b>	14" Nominal Diameter		<b>14"</b>		<b>DIM1</b> 0-10V Dimming to 1% with Dim-to-Dark		
<b>BHSD18</b>	18" Nominal Diameter		<b>16L</b> † 16 Watt Static White		<b>DALI</b> † DALI-2 DT6 Dimming to 1% without Dim-to-Dark		
			<b>12R</b> 12 Watt Static Red		<b>DMX</b> † DMX Control with Dimming to 0.1%		
			<b>12NA</b> 12 Watt Static Amber				
<b>Finish</b>			<b>6PM</b> 6 Watt Static Mint		<b>Voltage</b>		
<b>MW</b>	Matte White		<b>8CY</b> 8 Watt Static Cyan		<b>DV</b> 120-277VAC, 50/60Hz		
<b>WS</b>	Warm Satin Painted Anodized		<b>PXX</b> Custom Static Light Color (consult factory)		<b>347V</b> 347VAC, 60Hz (DIM1 only)		
<b>CS</b>	Cool Satin Painted Anodized		<b>16RGB</b> 16 Watt Dynamic RGB Color		<b>Options</b>		
<b>BR</b>	Bronze		<b>18"</b>		<b>LEL</b> * Integral 4W Emergency Battery Backup		
<b>LG</b>	Light Gray		<b>24L</b> † 24 Watt Static White		<b>FS</b> Single Fuse & Holder (n/a 347V)		
<b>CC</b>	Custom Color (Consult factory)		<b>18R</b> 18 Watt Static Red		<b>MS</b> ◊ Embedded Motion Sensor		
<b>Optic Type</b>			<b>18NA</b> 18 Watt Static Amber				
<b>PP</b>	Pearlescent Polycarbonate		<b>8PM</b> 8 Watt Static Mint				
<b>Lamp Type: Center Engine</b>			<b>12CY</b> 12 Watt Static Cyan				
<b>14"</b>			<b>PXX</b> Custom Static Light Color (consult factory)				
<b>10L</b>	10 Watt White LED		<b>24L/18R</b> † Switchable Color in White and Red				
<b>16L</b>	16 Watt White LED		<b>24L/18NA</b> † Switchable Color in White and Amber				
<b>22L</b>	22 Watt White LED		<b>24M</b> 24 Watt Dynamic RGBW Color (must pair with 24L center)				
<b>18"</b>			<b>Lamp Color</b>				
<b>16L</b>	16 Watt White LED		<b>30K8</b> 3000K / 80 CRI min.				
<b>24L</b>	24 Watt White LED		<b>35K8</b> 3500K / 80 CRI min.				
<b>33L</b>	33 Watt White LED		<b>35K9</b> 3500K / 90 CRI min.				
			<b>40K8</b> 4000K / 80 CRI min.				
			<b>40K9</b> 4000K / 90 CRI min.				

‡ White lamp color to match center light engine  
† Required for all configurations with RGB or RGBW, center and perimeter control  
\* n/a 347V; 0°C min. ambient; n/a in conjunction with DMX Driver or MS option  
◊ 18" models only; for use with white/static color and white/switchable color; max. 16L center; DIM1 only; n/a with 347V.  
▼ n/a 14" fixture; n/a with 24L/18R, 24L/18NA, or 24M (18" fixture).



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA  
This product is able to comply with the latest domestic preference legislation, such as the Buy America Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2025 Kenall Mfg. Co.

A brand of **Legrand**

# MEDMASTER™ SATURN


## BHSD SERIES – DUAL-ENGINE LAMPING

### PERFORMANCE

Model	Light Engine	Lamp Code	Lamp Description	Initial Delivered Lumens, By Lamp Color (lm)						Input Power (W)	TM-21 Reported L70 (hrs)
				30K8	35K8	35K9	40K8	40K9	Colors		
BHSD14	Center	10L	Static White	1,151	1,188	1,088	1,251	1,113	-	13	>72,000
		16L		1,749	1,806	1,654	1,901	1,692	-	22	
		22L		2,275	2,349	2,151	2,473	2,201	-	27	
	Perimeter	16L	Static White	1,574	1,625	1,488	1,710	1,522	-	20	>72,000
		12R	630 nm Red	-	-	-	-	-	513	16	
		12NA	590 nm Amber	-	-	-	-	-	351	16	
		6PM	PC Mint	-	-	-	-	-	803	8	>60,000
		8CY	500 nm Cyan	-	-	-	-	-	471	10	
		16RGB	PC Red	-	-	-	-	-	388	21	
			PC Green	-	-	-	-	-	1,934	21	>36,000
			Blue	-	-	-	-	-	198	21	
	Combined	10L/16L	Static White	2,742	2,832	2,593	2,981	2,653	-	33	>72,000
		16L/16L		3,299	3,406	3,119	3,585	3,191	-	39	
		22L/16L		3,848	3,974	3,639	4,183	3,723	-	46	
BHSD18	Center	16L	Static White	1,847	1,907	1,747	2,008	1,787	-	19	>72,000
		24L		2,817	2,909	2,664	3,062	2,725	-	30	
		33L		3,758	3,881	3,554	4,085	3,636	-	38	
	Perimeter	24L	Static White	2,477	2,558	2,343	2,693	2,396	-	29	>72,000
		18R	630 nm Red	-	-	-	-	-	824	23	
		18NA	590 nm Amber	-	-	-	-	-	588	24	
		8PM	PC Mint	-	-	-	-	-	1,288	11	>60,000
		12CY	500 nm Cyan	-	-	-	-	-	725	13	
		24L/18R	Sw. White / 630 nm Red	2,477	2,558	2,343	2,693	2,396	824	29 / 23	>72K / >60K
		24L/18NA	Sw. White / 590 nm Amber	2,477	2,558	2,343	2,693	2,396	588	29 / 24	
		24M	PC Red	-	-	-	-	-	532	27	>36,000
			PC Green	-	-	-	-	-	2,331	24	
			Blue	-	-	-	-	-	270	27	
			White (2500K, 70CRI)	-	-	-	-	-	2,073	28	
	Combined	16L/24L	Static White	4,344	4,485	4,108	4,722	4,202	-	49	>72,000
		24L/24L		5,294	5,467	5,006	5,754	5,121	-	59	
		33L/24L		6,308	6,514	5,965	6,857	6,103	-	68	


NOTE: Information subject to change without notice. All testing conducted by an ILAC/ISO17025 accredited laboratory. Please visit [www.kenall.com](http://www.kenall.com) for IES files and additional information.

Model: BHSD14-r-PP-16L\_16L-35K8-w-x-y-z  
Center and Perimeter On




Max Candela = 937 Located At Horizontal Angle = 0, Vertical Angle = 0  
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)  
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: BHSD18-r-PP-24L\_24L-35K8-w-x-y-z  
Center and Perimeter On



Max Candela = 1695 Located At Horizontal Angle = 0, Vertical Angle = 0  
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)  
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: BHSD18-r-PP-t-18NA-v-w-x-y-z  
Static Amber Perimeter On



Max Candela = 138 Located At Horizontal Angle = 0, Vertical Angle = 0  
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)  
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)



[www.kenall.com](http://www.kenall.com) | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA  
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Buy America Act (BABA), and others. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2025 Kenall Mfg. Co.

A brand of **Legrand**


# MEDMASTER™ SATURN

For additional photometry, go to [www.kenall.com](http://www.kenall.com)


## BHSD SERIES – DUAL-ENGINE LAMPING

### DIMENSIONAL DATA


#### 14" FIXTURE

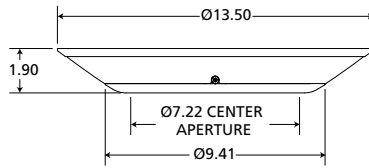



#### OPTIONAL LEL

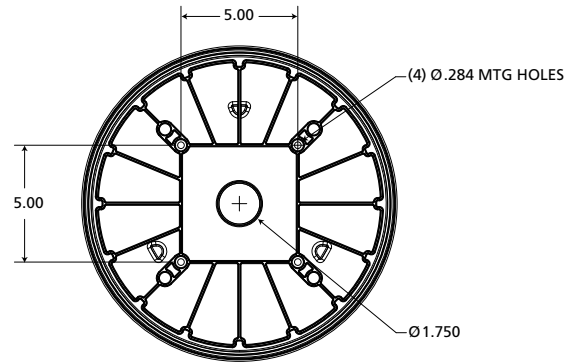

#### 18" FIXTURE

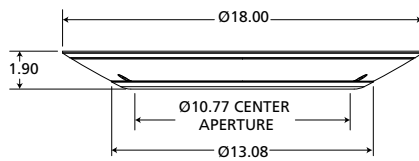

#### OPTIONAL LEL

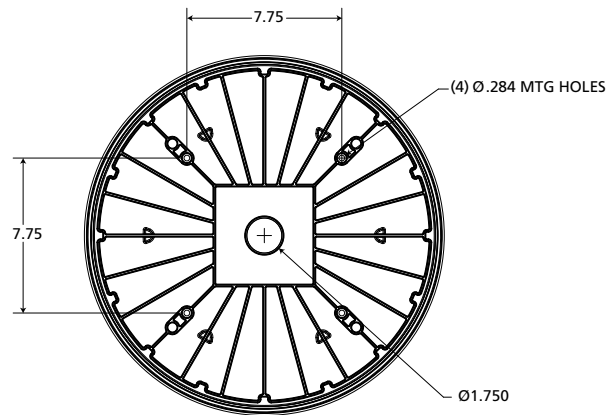

[www.kenall.com](http://www.kenall.com) | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2025 Kenall Mfg. Co.

A brand of **legrand**

BHSD-032025