

MILLENIUM™ FLAIR

HAFD SERIES – DUAL ENGINE LAMPING

PRODUCT FEATURES:

- » Center and perimeter light engines with independent illumination and control
- » Edge-lit, diffused center and near-translucent clear perimeter lenses provide unique lighting aesthetic within this product segment
- » Center light engine with static white LED
- » Perimeter light engine with static white, static color, RGB, RGBW or switchable (white and color)
- » 14" or 18" nominal diameter with 2" overall depth
- » IK10 impact rating and Peace of Mind Guarantee® against breakage



SPECIFICATIONS

HOUSING: Die-cast aluminum baseplate and frontal heat sink trim. Optional die-cast aluminum surface-mount adapter for use with conduit. Standard TGIC polyester powder coat finish on aluminum components with five-step pre-treatment to withstand 1,000-hour salt spray test per ASTM B117. See Ordering Information for available finishes. Closed cell gasketing seals all housing component interfaces.

OPTICAL: Injection-molded UV-stabilized polycarbonate outer lenses for center and perimeter light engines. Textured clear perimeter light guide for unique illuminated effect but near transparent non-illuminated appearance. Center light engine utilizes inner acrylic light guide to provide uniformity from edge-lit light source, in conjunction with diffused polycarbonate outer lens.

LAMPING: Center: 360° edge-lit illumination. Available 3000K, 3500K and 4000K white color temperatures with 3-step MacAdam variation allowance. Standard 80 CRI min, optional 90 CRI min. Perimeter: 360° edge-lit illumination. Available matching color temperature source to center white light engine. Available static color source in 630 nm native red, 590 nm native amber, phosphor-converted mint or 500 nm cyan; inquire with factory on other available static color options. Available Switchable engine on 18" model provides white light and native amber or native red, controlled by internal device based on signal input; see Control for further description. Available RGB (red-green-blue) in 14" model for dynamic and mixed lighting scenes. 18" model features RGBW perimeter lamping which includes a 2500K, 70 CRI white LED for the broadest color gamut and white color matching; a 90 CRI center lamp color is recommended in conjunction. The RGB(W) package uses phosphor-converted red, phosphor-converted green and native blue source for longevity.

ELECTRICAL: 120-277VAC, 50/60Hz electrical input with serviceable high-power factor electronic, constant-current drivers (<20% THD, >0.90 PF). 347VAC input available in DIM1 driver configurations. DIM1: Standard 0-10V dimming with 1-100% range and dim-to-dark capabilities; independent dimming control of center and perimeter lamping functions. 0.2mA source current per luminaire, per dimming line. DALI: Optional DALI-2 DT6 driver with 1-100% dimming range without dim-to-dark capabilities. Independent addressing and control of lamping functions. DMX: DMX-RDM compatible driver with 0.1-100% dimming range and dim-to-dark. (14" model) One four-channel driver powers both the static white center and the RGB perimeter lamp functions; four total DMX network addresses. (18" model) One driver powers the static white center and another driver powers the RGBW perimeter; five total DMX network addresses.

SENSOR & CONTROLS: (18" Model) Optional embedded microwave motion sensor (MS) mounted behind center diffuser. Factory default is 30% dimming and 20min. timeout. Custom settings available upon request. Sensor operates at 5.8 GHz (continuous-wave radar) and provides 360° coverage. Switchable perimeter lamping utilizes Kenall-developed internal device to switch between white or colored sources based on voltage of sensing input (10V = white, ≤5V = color). When MS option is ordered in conjunction with switchable perimeter, the product is factory wired to have both lamp functions on in white output state during occupancy. In periods of unoccupancy, the center lamp turns off and the perimeter changes to the specified color. This is intended to be a 'night light' or 'wildlife friendly' operational mode. To see the full list of third-party compatible controls, [click here](#).

INSTALLATION: Suitable for surface wall or ceiling installations over recessed junction box. -30°C to 40°C ambient environments, unless otherwise noted. Available surface adapter for applications requiring surface-run conduit or photocell control. Anchored four-point mounting required. Trim assembly secured to baseplate with three (3) face-mounted, color-matched, tamper-resistant Torx® fasteners.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty. Peace of Mind Guarantee® against breakage.

LISTINGS: Luminaire is certified to UL Standards by Intertek Testing Laboratory for Wet Location Wall and Covered Ceiling; listing includes Emergency Battery Pack "LEL" option. IP64 rating per IEC 60598. Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.



ORDERING INFORMATION (Ex: HAFD18-MW-PP-24L/24L/18NA-35K8-DIM1-DV)

Model	Finish	Optic Type	Lamp Type (Center/Perimeter)	Lamp Color	Driver	Voltage	Options	Accessory
		PP	/					
Model			Lamp Type: Perimeter Engine		Driver Type			
HAFD14 14" Nominal Diameter			14"		DIM1 0-10V Dimming to 1% with Dim-to-Dark			
HAFD18 18" Nominal Diameter			16L † 16 Watt Static White		DALI † DALI-2 DT6 Dimming to 1% without Dim-to-Dark			
			12R 12 Watt Static Red		DMX † DMX Control with Dimming to 0.1%			
			12NA 12 Watt Static Amber					
Finish			6PM 6 Watt Static Mint		Voltage			
MW Matte White			8CY 8 Watt Static Cyan		DV 120-277VAC, 50/60Hz			
MB Matte Black			PXX Custom Static Light Color (consult factory)		120 120VAC, 60Hz			
WS Warm Satin Painted Anodized			16RGB 16 Watt Dynamic RGB Color		277 277VAC, 60Hz			
CS Cool Satin Painted Anodized					347 † 347VAC, 60Hz			
BR Bronze								
DB Dark Bronze			18"		Options			
LG Light Gray			24L † 24 Watt Static White		LEL * Integral 4W Emergency Battery Backup			
CC Custom Color (Consult factory)			18R 18 Watt Static Red		BPC-SA † Photo Control – Shielded Button Type with Die-cast Surface Adapter			
Optic Type			18NA 18 Watt Static Amber		FS Single Fuse & Holder (n/a 347V)			
PP Pearllescent Polycarbonate			8PM 8 Watt Static Mint		NAT Suitable for Natatorium applications			
			12CY 12 Watt Static Cyan		MS ◊ Embedded Motion Sensor			
			PXX Custom Static Light Color (consult factory)		Accessories			
Lamp Type: Center Engine			24L/18R † Switchable Color in White and Red		SA Die-Cast Surface Adapter for Conduit (non-compliant with ADA)			
14"			24L/18NA † Switchable Color in White and Amber					
10L 10 Watt White LED			24M 24 Watt Dynamic RGBW Color (must pair with 24L center)					
16L 16 Watt White LED								
22L 22 Watt White LED								
			Lamp Color					
18"			30K8 3000K / 80 CRI min.					
16L 16 Watt White LED			35K8 3500K / 80 CRI min.					
24L 24 Watt White LED			35K9 3500K / 90 CRI min.					
33L 33 Watt White LED			40K8 4000K / 80 CRI min.					
			40K9 4000K / 90 CRI min.					

‡ White lamp color to match center light engine
 † n/a 14" fixture; n/a with 24L/18R or 24L/18NA (18" fixture)
 † Required for all configurations with RGB or RGBW, center and perimeter control
 * n/a 347V; 0°C min. ambient; n/a in conjunction with DMX driver, MS option, or 33L Center w/DALI.
 † 120 or 277V input only; non-compliant with ADA
 ◊ 18" models only; for use with white/static color and white/switchable color; max. 16L center; DIM1 only; n/a with 347V



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2025 Kenall Mfg. Co.


A brand of **Legrand**

**HAFD SERIES – DUAL ENGINE LAMPING
PERFORMANCE**

Model	Light Engine	Lamp Code	Lamp Description	Initial Delivered Lumens, By Lamp Color (lm)						Input Power (W)	TM-21 Reported L70 (hrs)
				30K8	35K8	35K9	40K8	40K9	Colors		
HAFD14	Center	10L	Static White	1,207	1,246	1,141	1,312	1,167	-	13	>72,000
		16L		1,786	1,845	1,689	1,942	1,728	-	20	
		22L		2,469	2,550	2,335	2,684	2,389	-	26	
	Perimeter	16L	Static White	627	647	593	681	606	-	13	>72,000
		12R	630 nm Red	-	-	-	-	-	328	16	
		12NA	590 nm Amber	-	-	-	-	-	193	16	
		6PM	PC Mint	-	-	-	-	-	538	8	
		8CY	500 nm Cyan	-	-	-	-	-	334	10	>60,000
		16RGB	PC Red	-	-	-	-	-	263	22	
			PC Green	-	-	-	-	-	1,221	22	
			Blue	-	-	-	-	-	165	22	
	Combined	10L/16L	Static White	1,840	1,900	1,740	2,000	1,780	-	26	>72,000
		16L/16L		2,407	2,485	2,276	2,616	2,328	-	32	
		22L/16L		3,096	3,197	2,928	3,365	2,995	-	38	
HAFD18	Center	16L	Static White	1,765	1,823	1,669	1,919	1,707	-	19	>72,000
		24L		2,878	2,971	2,721	3,128	2,784	-	29	
		33L		3,551	3,667	3,358	3,860	3,435	-	39	
	Perimeter	24L	Static White	954	985	902	1,037	923	-	29	>72,000
		18R	630 nm Red	-	-	-	-	-	403	23	
		18NA	590 nm Amber	-	-	-	-	-	235	24	
		8PM	PC Mint	-	-	-	-	-	687	11	
		12CY	500 nm Cyan	-	-	-	-	-	402	13	>60,000
		24L/18R	Sw. White / 630 nm Red	954	985	902	1,037	923	403	29 / 23	
		24L/18NA	Sw. White / 590 nm Amber	954	985	902	1,037	923	235	29 / 23	
		24M	PC Red	-	-	-	-	-	276	27	>72K / >60K
			PC Green	-	-	-	-	-	1,480	27	
			Blue	-	-	-	-	-	185	26	
			White (2500K, 70CRI)	-	-	-	-	-	1,030	28	
	Combined	16L/24L	Static White	2,988	3,086	2,826	3,248	2,891	-	48	>72,000
		24L/24L		3,832	3,957	3,623	4,165	3,707	-	58	
		33L/24L		4,787	4,943	4,527	5,204	4,631	-	67	


NOTE: Information subject to change without notice. All testing conducted by an ILAC/ISO17025 accredited laboratory. Please visit www.kenall.com for IES files and additional information.

Model: HAFD18-r-PP-24L_u-40K8-w-x-y-z
Center On




Max Candela = 1175 Located At Horizontal Angle = 0, Vertical Angle = 0
 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Model: HAFD18-r-PP-t_24L-40K8-w-x-y-z
Static White Perimeter On



Max Candela = 118 Located At Horizontal Angle = 90, Vertical Angle = 12.5
 1 - Vertical Plane Through Horizontal Angles (90-270) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (12.5) (Through Max. Cd.)

Model: HAFD18-r-PP-24L_24L-40K8-w-x-y-z
Center Perimeter On



Max Candela = 1206 Located At Horizontal Angle = 90, Vertical Angle = 2.5
 1 - Vertical Plane Through Horizontal Angles (90-270) (Through Max. Cd.)
 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2025 Kenall Mfg. Co.


A brand of **Legrand**

MILLENIUM™ FLAIR


HAFD SERIES – DUAL ENGINE LAMPING

DIMENSIONAL DATA




14" FIXTURE

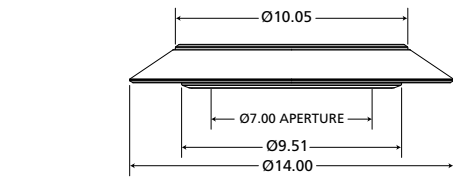


OPTIONAL LEL



OPTIONAL SURFACE ADAPTER

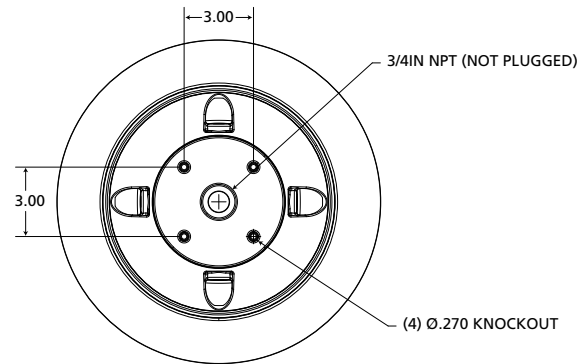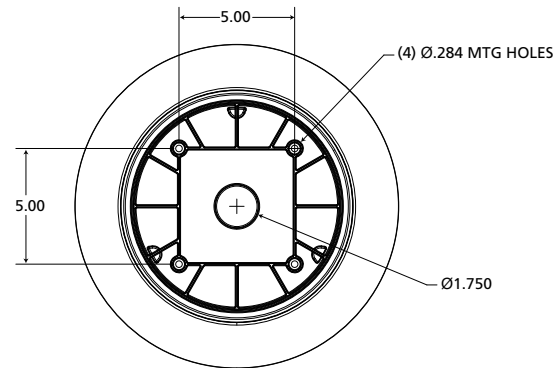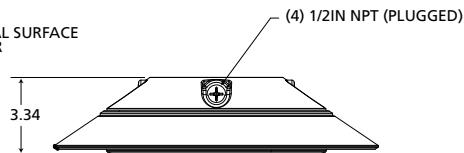




18" FIXTURE

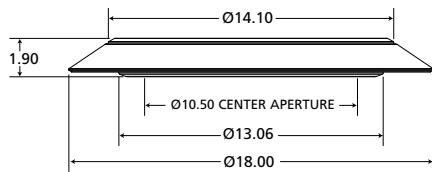

OPTIONAL LEL



OPTIONAL SURFACE ADAPTER

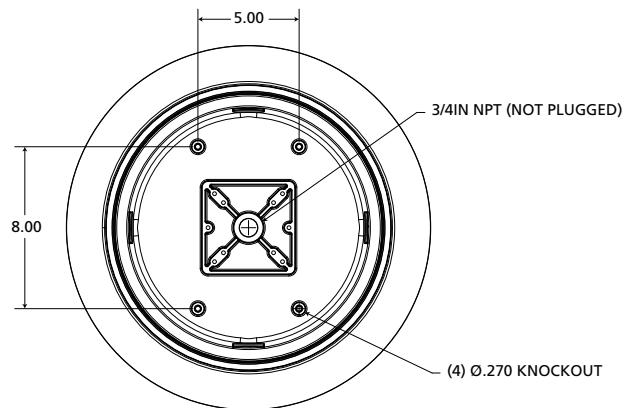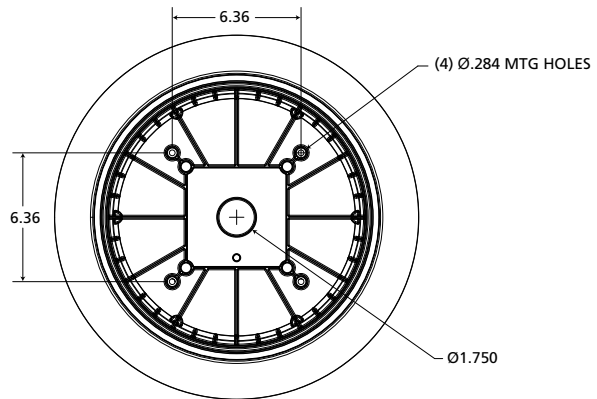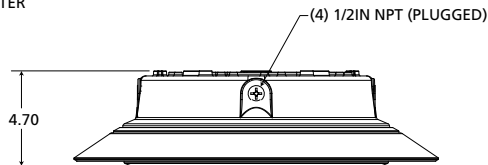

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2025 Kenall Mfg. Co.

A brand of **legrand**

HAFD-042325